


The B/W VTC-EB15B and Color VTC-EB25C weatherproof Bullet Cameras deliver sharp, natural images at a very low overall cost. These miniature cameras require no additional lenses or housings for outdoor use. Because they are 12VDC powered, these cameras are an excellent choice for use in remote or covert installations.



Specifications	VTC-EB15B	VTC-EB25C
Image Device	1/3" B/W Samsung CCD image sensor	1/4" Panasonic Color CCD image sensor
Effective Pixels	510 x 492	512 x 492
Resolution	380 TV Lines	380 TV Lines
Minimum Illumination	0.25Lux / F2.0	2Lux / F2.0
S/N Ratio	More Than 48dB(AGC off)	More Than 48dB(AGC off)
Electronic Shutter	1/60 to 1/100,000 sec.	1/60 to 1/100,000 sec.
Load Impedance	75 Ω	75 Ω
Standard Lens	3.6mm / F2.0	3.6mm / F2.0
Optional Lenses	2.9mm, 6mm, 8mm	2.9mm, 6mm, 8mm
Power Source	12VDC (+/-10%)	12VDC (+/-10%)
Power Consumption	90 mA	80 mA
Weight	305 g. / 10.76 Oz. / 0.67 Lbs.	305 g. / 10.76 Oz. / 0.67 Lbs.
Dimensions (L x OD)	3" x 1.1" (87mm x 26mm)	3" x 1.1" (87mm x 26mm)

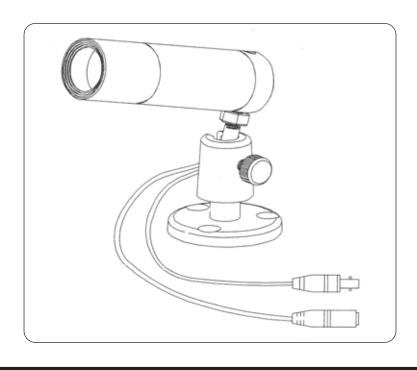

9970 GLENOAKS BLVD. UNIT B SUN VALLEY, CA 91352 PHONE: 888-VITEK-70 818-771-0300 FAX: 818-771-0400 WWW.VITEKCCTV.COM

