

TIMENET

GPS Master NTP Time Server



NTP master reference clock for CCTV & Access Control applications

- Accurate universal atomic clock reference
- Supports all NTP compatible devices
- Ideal for CCTV and DVR applications
- Far lower cost than competing products
- Ideal for closed or secure networks
- Direct network interface for remote siting
- Simple setup – one IP address
- Automatic GPS lock and time sync
- Extremely compact design
- Indoor location (antenna on a window)
- Integral watchdog for long-term reliable operation
- Robust, wall mounting, self contained unit
- Wide operating temperature range
- Very low power use



TIMENET provides a low-cost solution to the problem of providing accurate reference time signals for CCTV recording equipment.

CCTV and digital video recorder (DVR) installations require accurate reference time signals for synchronisation of system clocks to ensure that they are always set at the precisely correct time. It is crucial that all recordings are accurately time-stamped, especially for evidential purposes. Many DVR products, especially those which are PC-based, have inaccurate internal clocks which drift by many seconds per week. Considering that DVR systems may be left unattended for months on end, it is easy to see that the time settings can end up being in error by many minutes.

The traditional solution to providing an accurate reference time has been to use an atomic clock radio receiver or GPS sensor linked to an expensive rack-mounted master clock server, typically with serial-only output. Network output versions tend to be even more expensive. For this reason, master reference clocks are normally only used in very high-end installations such as city centres, airports and prisons. TIMENET integrates the GPS receiver and master NTP clock server into a single device which can be directly connected to the network. TIMENET is extremely compact, can be wall-mounted, uses very little power and is less than half the cost of competing solutions.

TIMENET installation and setup
The time server unit is very simple to install and set up. The GPS antenna (pictured below) is included with the TIMENET product. The antenna itself is provided with a self-adhesive surface which can be affixed to any window which has a view of some sky (to pick up the GPS satellite transmissions). The TIMENET unit can be positioned anywhere within the 3m reach of the antenna lead, and may be conveniently wall-mounted with the integral brackets supplied.



TIMENET is then connected to the network through its RJ45 connector directly to the CCTV/DVR network using a standard CAT5 cable (up to 100m long). The TIMENET setup program is run on any Windows PC, and the only parameter to set is the desired IP address of the TIMENET device. This completes the time server installation. Any DVR or other NTP-compatible network devices can now be programmed to get their NTP time signals from the IP address of the TIMENET server.

About GPS

GPS is a global satellite system used primarily for position location, using very accurate atomic clock references. GPS signals are far less prone to interference than traditional national radio clock signals. Thus TIMENET is a universal solution which can be used anywhere in the world.

About Time Zones


UTC is effectively a GMT reference time and TIMENET provides this via NTP as a universal reference. It is the task of the network client (i.e. DVR or other client device) to look after the local time zone setting for the country or zone location, including any local or national variations to daylight savings time or equivalent

About UTC Time

Universal co-ordinated time is an official world-wide atomic clock standard for time, agreed by national standards around the world. UTC time copes with variations in the earth's rotation by the introduction of leap-seconds at pre-defined intervals. GPS time references incorporate this automatically. Therefore TIMENET will continuously provide an accurate UTC clock reference automatically.

About NTP

NTP stands for Network Time Protocol and is a universal standard for time synchronisation of computers or other devices on a network. TIMENET is NTP-compatible and acts as a time server for any NTP-enabled client.

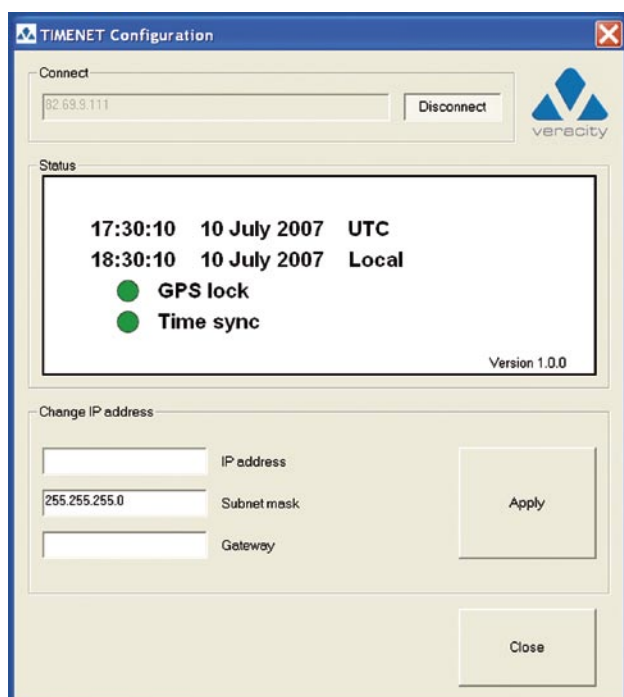

Setup Program

The simple setup program connects to TIMENET by entering the default IP address. The required IP address is simply entered and applied.

The indicators show GPS Lock and Time Sync status.

GPS Lock:

Green = sat. lock
Red = no sat. lock
Grey = not yet determined

Time Sync :

Green = sync. to GPS
Red = no sync. to GPS
Grey = not yet determined

TIMENET Technical Specifications

Time Source	GPS Satellite
Protocol	NTP Stratum 1 Time Server
Accuracy	Ethernet NTP \pm 100ms overall
	GPS source $\pm 0.1\mu\text{s}$
Antenna	GPS sensor on 3m cable (included)
Connectivity	10/100BaseT Ethernet, RJ45
Status indicators	Green LED - long pulse : OK; - short pulse : no lock
	Amber LED – network connectivity
Power	6V DC External power supply (included)
Power Consumption	0.9W
Dimensions	W: 67mm x D: 92mm x H: 33mm
	(W: 86mm with wall mounting brackets)
Operating Temperature	-15C to 75C (5F to 125F)
Relative Humidity	95% non-condensing
Approvals	CE, FCC, RoHS
Warranty	3 years
Product Code	VTN-TN



Veracity UK Ltd
6 Barns Street
Ayr
KA7 1XA

Office +44 (0)1292 264967
Fax +44 (0)1292 263127
sales@veracityuk.com
www.veracityuk.com