


104RTC

CCTV Monitor Small Screen





- **World Leading Active Matrix TFT-LCD Panel**
Truly flat LCD screen delivers razor sharp images
- **Hi Performance Image Proceseeing Circuit**
3D Comb filter and Deinterlace function realize perfect images
- **Real Industrial Mechanical Design**
Rigid case comes with Heavy duty metal vessel, LCD protection glass
- **Versatile terminals for Security and Industrial Solution**
Multiple input and output of Video(BNC Type), Audio, S-Video and RGB
- **Trigger & Auto Switching Function**
Alarm and Time switching feature
- **Space save and Easy handling**

SPECS

Display	Screen Size	10.4"
	Resolution	800 x 600@60Hz
	Contrast Ratio	211.2x158.4mm
	Brightness	400:1
	Aspect Ratio	250cd/m2
	Color Depth	4:3
	Viewing Angle (H / V)	130°/105°
	Pixel Pitch	0.264mm
	Response Time	25ms(Typ)
	Scanning Frequency (H / V)	31~48KHz / 56~75Hz
	Video System	NTSC / PAL
Interface	RGB In (15-pin)	1
	Video In / Out (BNC Jack)	2 / 2
	Audio In / Out	Not Available / Not Available
	S-Video In / Out	1 / Not Available
	Component / DVI / HDMI In	Not Available
	Trigger In	1
	PC stereo In	1
Audio	Built-in Speakers	Yes / 1W x 2
	Gradual Volume Increase	Yes
Transmitter	Remote Control	Yes
Special Features	3D Comfilter	Yes
	Deinterlace Function	Yes
	Video Resolution(Max)	520 TV line
	LCD Protection Glass	Not Aavailable
	Rack Mountable Kit	Optional
	Camera Mounting Hole	Yes(Upper)
	OSD Language	English, French, Deutsch, Italian Espanol, Portugues , Nederland
	Trigger sensor & Auto Switching	Yes
	VESA™ Standard Compatible	Yes(Wall and Rack Mount) / (75 x
Additional Information	Cabinet Dimensions (WxHxD)	218x219x38mm
	Weight	2.05Kg(4.52lbs)
	Dimensions with Packaging (WxHxD)	285 x 260 x 150mm
	Weight	3.03Kg(6.68lbs)
	Power Source	AC100~240V(50/60Hz)
Cabinet	Finish	Black
	Tilt Stand	Yes
Warranty	Warranty: Parts/Labor	
	MTBF (Approx.)	20K hrs.
Regulations	TUV-NRTL(same as UL), CB, FCC(B), CE-EMC(LVD)	

DIMENSIONS

Units : mm

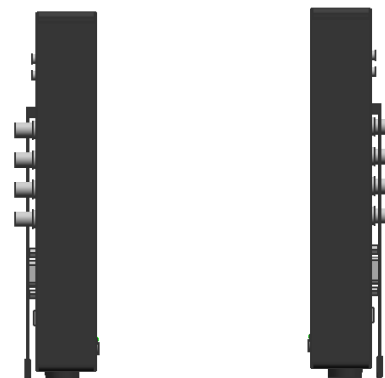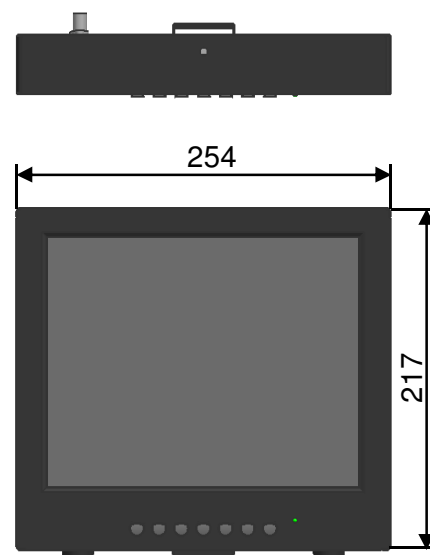

<http://www.oriontechnology.co.kr>

1242 Apo industrial zone, In-ri, Apo-up, Gimchun-shi, Kyungbuk, Korea

TEL:82-54-430-8902 | FAX:82-54-430-8904