





MODEL #	VZ-26RTC
DISPLAY	
Screen Size	26"
Max. Resolution	1366 x 768 @ 60Hz
Pixel Pitch	0.412mm x 0.412mm
Brightness	450cd/m²(Typical)
Contrast Ratio	3000:1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178°/178°
Display Color	16.7 Million
Response Time	< 6.5ms
Video System	NTSC / PAL
Frequency (H)	31 ~ 64Khz
Frequency (V)	56 ~ 75Hz
INTERFACE	
AV(Composite) In/ Out	2 / 2
S-Video In / Out	1 / 1
RGB In(15Pin D-Sub)	1
Component(Y, Pb, Pr, Sound L/R) In	1
DVI-In	1
HDMI1 / HDMI2 In	1 / 1
Trigger In	1
AV(Composite) Sound In/Out (RCA Type)	2 / 2
PC Stereo In/Out	1 / 1
AUDIO	
Built in speaker	2W x 2
SPECIAL FEATURES	
Multi Display Function	PIP / PBP / VOV
Filter Type	3D Comb filter / DeInterlace
LCD Protection Glass	YES
Trigger Sensor / Image Rotation	YES / YES
Video Resolution(Max)	600 TV Line
Camera Mounting Hole	Not Available
Multi-lingual Language	English, Spanish, French, German, Italian, Portuguese, Dutch
DIMENSIONS	
Outline Dimension (W x H x D)	25.99" x 16.23" x 3.83" (660.2mm x 412.2mm x 93.3mm)
Net Weight	35.27 lbs (16.0kg)
MOUNT	
VESA	200mm x 100mm, M4X8 Screws
GENERAL	
Transmitter - IR Remote Control	YES
Power - Electrical Ratings	AC100 ~ 240V(50/60Hz)
- Consumption	120W
Warranty - Parts/ Labor	3 Year / 3 Year
- MTBF (Approx.)	50,000 Hours
Operating Temperature	32 ~ 104°F / 0 ~ 40°C
Regulations	TUV-NRTL (=UL), CB, FCC(B), CE-Emc(LVD)
Compatible Mounts - WALL	VZ-WM31, VZ-WM40, VZ-WM50
- CEILING	VZ-CMK01, VZ-CMK02, VZ-CMK03
- Rack	Not Available

VZ-26RTC ADVANTAGES:

- 26" LCD CCTV Monitor
- BNC, VGA, HDMI, DVI
- 3D Comb-filter, De-interlace, Built-in Speakers
- 3-Year Warranty
- Image Rotation Feature Prevents "Burn-In"

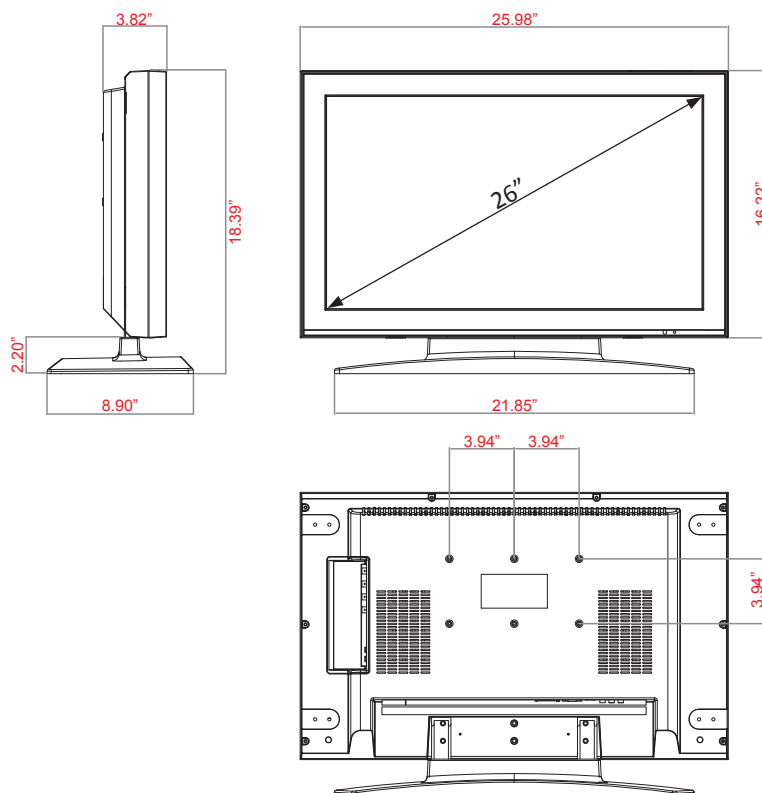

INTERFACE

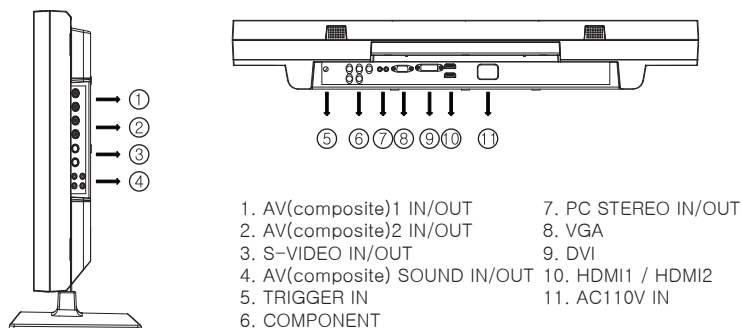

Contact ViewZ

- Address: 1220 N.Kraemer Blvd, Anaheim, CA, 92806
- Phone: (714)630-3380, Fax: (714)630-2335
- Sales: sales@viewzusa.com
- Specifications subject to change without notice.