



Mobile Monitors

Mobile Monitor with Quad, Dual or Single Channel Input

These 7" high resolution monitors enable image display of up to 4 mobile cameras for increased safety in large and special vehicle operation. Designed specifically for in-vehicle use to withstand vibrations up to 5.5G. Built-in speaker for audio monitoring.

Features:

- High resolution 7" TFT LCD panel
- Quad, dual or single channel input models
- G-Force rating of 5.5G
- Normal/mirror image switching
- Automatic picture display (2 triggering functions)
- Automatic brightness sensor (Day/Night)
- OSD control
- Built-in speaker

Mobile Monitor with Quad, Dual or Single Channel Input




■ Specifications

Models	ZM-RVJ17NP	ZM-RVJ27NP	ZM-RVQ47NP
LCD Size	7" Diagonal, 16:9 Format, Color		
Resolution	480 x 234		
Video Systems	NTSC/PAL		
Auto Contrast/Brightness	Day/Night Sensor		
Field of View	Top: 30°, Bottom: 60°, Left: 60°, Right: 60° (typical)		
Camera Input	1	2	4
Audio Input / Video Output	1 Audio Input	--	1 Audio Input 1 Video Output
Trigger Input	1	2	5
Speaker	Built-in, Approx 23pi, Impedance: 8Ω, 0.3 Watt Max		
G-Force Rating	5.5G		
Operating Temperature	14° F ~ 122°F / -10° C ~ 60°C		
Storage Temperature	-22° F ~ 185°F / -30° C ~ 80°C		
Dimensions (W x H x D)	7.8" x 5.3" x 1.2" / 197mm x 135mm x 30mm		
Power Connector	8-Pin Large Connector	13-Pin Large Connector	25-Pin Large Connector
Power Input	DC 10V ~ 32V		
Power Consumption	Max. 12 Watt		Max. 20 Watt
Weight	1.4lbs. / 650g		

Specifications are subject to change without notice

■ Dimensions

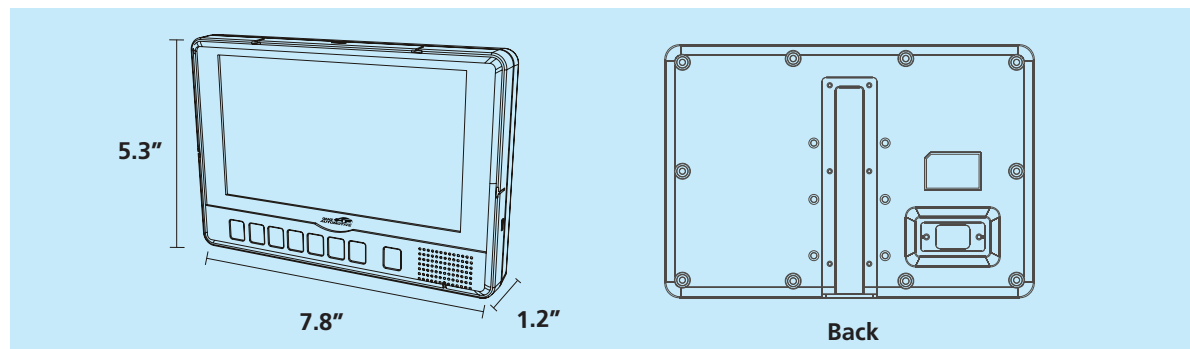

■ Accessories


Model	Description
ZM-CRVSB	Bracket Stand
ZM-CRVRC	Handheld Remote Control
ZM-CRVSV	Sun Visor



Bracket Stand
ZM-CRVSB



Remote
ZM-CRVRC



Sun Visor
ZM-CRVSV