


# AeGIS 4000

SINGLE LINE "NON SUBSCRIBER" TELEPHONE ACCESS CONTROL SYSTEMS

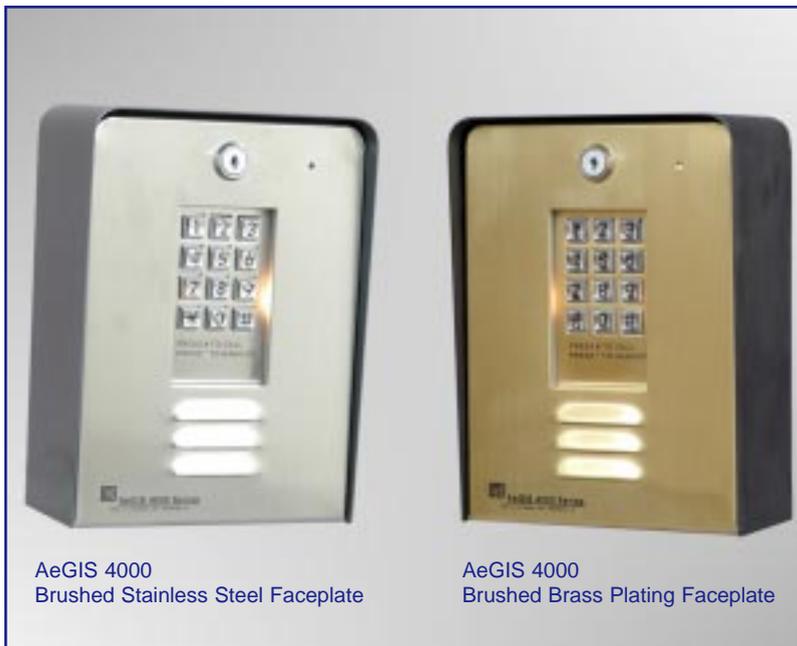

AeGIS 4000  
Brushed Stainless Steel Faceplate

AeGIS 4000  
Brushed Brass Plating Faceplate

## FEATURES

- **Hands Free Single Phone Line " Non Subscriber"** Telephone Entry Access System.
- Uses existing phone line or dedicated phone line (two systems can be installed).
- Optional Radio Receiver.
- **Programming** local via built-in keypad or remote via a touch tone phone.
- **Remote Access** press 9 to unlock door 1 or press 8 to unlock door 2 or optional Radio Transmitter
- **Local Access** keypad entry code (50 programmable codes).
- **Distinctive Ringing.**
- **Call Waiting.**
- **Automatic and Manual Call Forwarding** to call a secondary phone number.
- **Built Auxiliary Input** for radio frequency receiver, timer, free exit switch, panic bar, etc.
- **Recess Keypad w/ Built-in night light.**
- Brushed Stainless Steel or Brushed Brass Plating Faceplate. Outdoor or Indoor.
- Surface Mount. Outdoor or Indoor.

## SPECIFICATIONS

**Power Input:** 12VAC 40VA UL Listed Transformer (supplied) or 12VDC 40VA (output reading must be 13.5 - 14.5 VDC).

**Current Consumption:** 420 mA idle, 620 mA operating.

**Emergency Battery:** 12 VDC 4 Ahr rechargeable battery with 12 VDC charger (not supplied).

**Operating Environment:** 0°F to 140°F  
Relative Humidity 0 % - 95 % noncondensing.

**Relay:** Two built in relays. Form C Dry Contact 120 VAC 10A, 24VDC 10A or 250VAC 7A. Programmable output 01-90 seconds.

**Works behind an analog PBX to call extensions.**

**Dialing:** Tone.

**Memory Type:** EEPROM (non-volatile).

**Programmable Talk Time.**

**Standard Programming:** Via Built-in Keypad or Touch-Tone Phone.

**Incoming touch-tones through the microphone are ignored by the system.**

**Construction:** 16 Gauge Cold Rolled Steel back box with enamel finished and Brushed Stainless Steel or Brushed Brass Plating Faceplate.

**Dimensions :** 9-1/8" (H) x 6-15/16"(W) x 3-7/8"(D).

**Shipping Weight:** 8 Lbs. approximate.

**"TWO YEARS WARRANTY"** includes lightning and power surge if Pach and Company surge protector (ASP1) is installed).

## ORDER PART NUMBER

**4000** (Brushed Stainless Steel Faceplate).

**4000SBZ** (Brushed Brass Plating Faceplate, special order only).

## OPTIONS AND ACCESSORIES

**ARFR** Radio Frequency Receiver

**ARFT** Radio Frequency Transmitter

**AHP5** Heater Kit with Thermostat.

**ASP1** AC & Telephone Line Surge Protector.

**APM1** Pedestal Mounting Post for auto and pedestrian.

**APM2** Double arm mounting base plate for auto, pedestrian and semi-truck.

**APM3** Pedestal mounting post for semi-truck.

**APM4** Pedestal Mounting Post with 45° arm.

**APM5** Double arm side by side mounting base plate.

**AVP4** AeGIS Black and White Video Package.

**AVP4C** AeGIS Color Video Package.

Specifications subject to change without prior notice.



Pach & Company  
www.pach-co.com

941 Calle Negocio  
San Clemente, CA 92673

Phone: 1-888-678-7224  
Fax: 949-498-6879