

# AMX-437-6M-IZ1050-B

## Access ANPR Camera



- CMOS image sensor
- Video compression standards: H.265/H.264M/H.264H/H.264B/MJPEG
- Integrated design, IP67

### System Overview

The long range access ANPR camera is designed with high-performance CMOS image sensor and independently-developed processor, capable of reading and extracting detailed vehicle information day and night. Intelligent deep learning algorithm allows recognition of vehicle license plate, and vehicle brand, model, logo, and color. The camera is extensively applied to vehicle capture and recognition of community road, parking lot, and other entrance and exit surveillance scenarios.

### Functions

#### High-quality image

Industry-specific CMOS image sensor with high sensitivity, high SNR and excellent WDR provides lifelike images in all weathers.

#### Complete intelligence

High-performance CPU processor helps extract and analyze information of motor and non-motor vehicles in real-time, providing vehicle feature details for business decision-making.

#### High-level protection

Integrated design with low power consumption, and IP67 protection grade, suitable for various harsh environments.

#### Multiple ports

Various signal, data and communication ports, capable of connecting to external devices such as barrier.

#### Easy installation

Built-in LED illuminator and motorized vari-focal lens, providing ease of installation and commissioning.

### Technical Specification

#### Basic

Illuminator Number	6 IR illuminators, brightness adjustable
Image Sensor	1/1.8" CMOS
Image Resolution	2688 × 1520 (OSD black strip excluded)
Video Resolution	Main stream: 4M (2688 × 1520), 1080p (1920 × 1080), 720p (1280 × 720) Sub stream: 720p (1280 × 720), D1 (704 × 576, 704 × 480), CIF (352 × 288, 352 × 240)
Video Frame Rate	PAL: Main stream (2688 × 1520@25 fps, 1920 × 1080@25 fps, 1280 × 720@25 fps), sub stream: (1280 × 720@25 fps, 704 × 576@25fps, 352 × 288@25 fps) NTSC: Main stream (2688 × 1520@30 fps, 1920 × 1080, 1280 × 720@30 fps), sub stream (1280 × 720@30 fps, 704 × 408@30 fps, 352 × 240@30 fps)
Bit Rate	H.264B: 32 Kbps–32768 Kbps H.264M: 32 Kbps–32768 Kbps H.264H: 32 Kbps–32768 Kbps H.265: 32 Kbps–32768 Kbps MJPEG: 512 Kbps–65536 Kbps
Video Compression	H.264B/H.264M/H.264H/H.265/MJPEG
Picture Encoding Format	JPEG
Noise Reduction	3D NR
White Balance	Full auto, auto color temperature range, customized color temperature
Electronic Shutter Speed	1/50–1/10,000 auto or manual
WDR	96 db
Edge Enhancement	Yes
Exposure Mode	Full auto, customized auto, customized
Iris Control	Auto iris (W:1.33—T:1.34)

#### Performance

Trigger Mode	Video detection; I/O coil
--------------	---------------------------

Shutter	Single shutter
Storage	1 built-in TF card slot. Supports Kingston 16 G, 32 G, 64 G, and 128 G; 16 G, 32 G, 64 G, and 128 G; SanDisk 16 G, 32 G, 64 G, and 128 G
Image Tampering Prevention	Yes. Video/picture can be checked through watermark and verification
Field of View	H: 40.55° (W)–9.33° (T) V: 22.7° (W)–5.3° (T) D: 46.6° (W)–10.63° (T)
Illumination Distance	30 m (98.43 ft)
Capture Distance	8 m–30 m (26.25 ft to 98.42 ft)
Detected Width	6 m–7 m (19.69 ft to 22.97 ft)
Min. Illumination	0.002 lx (built-in illuminator on)
Max. Detection Speed	60 km/h (37.28 miles per hour)
Alarm Event	Alarm for events of no storage card, storage card no space, storage card error, network disconnection, IP conflict, and illegal access
Security	Authorized username and password, MAC address binding, HTTPS encryption, IEEE 802.1x, and network access control
OSD Overlay	Supports overlay of time, address, plate, vehicle (color, type, accuracy), vehicle posture, counterfeit, checkpoint direction, trigger source, and custom
Automatic Network Replenishment (ANR)	Yes. Transfer through platform/FTP
Auto Registration	Yes

### Intelligence

Vehicle Detection	Vehicle capture rate $\geq 99\%$
Vehicle Recognition	Supports recognizing vehicle type, vehicle color, features of driver and front-seat passenger, licensed/unlicensed vehicle. Vehicle recognition rate $\geq 95\%$
Video Metadata	Yes
Intelligent Track Frame	Intelligent frame display. Supports displaying vehicle plate and vehicle path

### Port

Lens Mount	Lens in the camera module
Analog Output	1
Network	1 $\times$ 100/1000 M Ethernet port (RJ-45)
RS-485	2
RS-232	1
Alarm Input	3, optocoupler input (on-off input)
Alarm Output	3 ports. 2-channel optocoupler output, 1-channel relay output, which can connect to devices such as barriers
Audio Input	1-channel RCA port
Audio Output	1-channel RCA port

### General


Power Supply	12V DC, 24V AC, PoE+
Power Consumption	< 20 W

Operating Temperature	-30°C to +65°C (-22°F to +149 °F)
Operating Humidity	10%RH–90%RH (no condensation)
Casing	Metal + plastic
Protection Grade	IP67
Dimensions	515.2 mm $\times$ 124.7 mm $\times$ 183.2 mm (20.28" $\times$ 4.91" $\times$ 7.21") (L $\times$ W $\times$ H)
Net Weight	1.9 kg (4.19 lb)
Gross Weight	3.8 kg (8.38 lb)
Installation	Bent pole bracket (included)
Lens	Standard 10 mm–50 mm (0.39"–1.97")

### Certification

CE, FCC	Yes
RoHS	Yes

### Installation

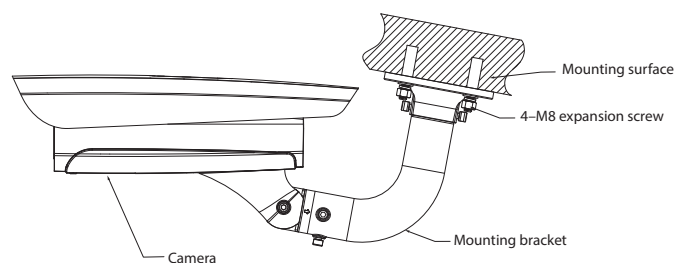

### Dimensions (mm[inch])

