

3M™ Fiber Dome Closure Family



Reliable
Fiber
Protection

3M

More flexibility for your complex fiber optic network

A full line of closures and accessories designed to protect fiber optic facilities in any environment. The 3M™ Fiber Dome Closure family has earned its reputation for reliable protection of fiber optic facilities. Now, the Fiber Dome Closure family includes new models and configurations for more flexibility to meet the complex needs of today's fiber optic networks.

3M™ Fiber Dome Closures:

- Intended to meet the needs of anyone using fiber optic splice closures in the long haul, metro, local access (xDSL, HFC, wireless backhaul) and FTTx feeder/distribution networks.
- Designed for butt, single or ribbon fiber applications.
- Tested to Telcordia's GR-771-CORE Generic Requirements for Fiber Optic Splice Closures.
- Require no special tools, which reduces tooling costs and allows for ease of installation and re-entry into the closure.
- Feature a fixed O-ring sealing system along with an innovative latching mechanism. This combination provides for simple, virtually error-free closure sealing and re-entry.
- Utilize the External Cable Assembly Module (ECAM) built-in cable entry port system, which allows true plug-and-play capability. This reduces installation and labor costs because the cable preparation and installation are completed outside of the closure body, and allows the tech to add/remove cables from the closure without breaking the cable seals of previously installed cables.


3M™ Fiber Dome Closure Family

Features	Benefits
Complete product family	Four distinct sizes fit most butt/branch splicing configuration, outside plant environment, or application.
Constructed of highly chemical-resistant material	Can be deployed in most environments: buried, underground, and aerial.
ECAM port design	Allows true plug-and-play capability which can reduce installation and labor costs because the cable preparation and installation are completed outside of the closure body.
Built-in cable entry termination system	Allows the technician to add and remove cables from the closure without breaking the cable seals of previously installed cables.
Fixed O-ring seal	Easy, virtually error-free closure sealing and re-entry.
Built-in integral multipurpose fiber management system	Provides separate area for sorting, routing, protecting, and "expressing" buffer tubes, single and ribbon fibers.
Self-stacking hinged tray with modular splice holders	Allows easy access to fibers/splices without removing other trays. The modular splice holder design allows the trays to accommodate various fiber splice types: 2.4 mm & 3.0 mm single fusion, 12-fiber mass fusion, 3M™ Fibriok™ Splices.
No special tools required	Allows ease of installation and re-entry.
Simple, error-free closure sealing & re-entry system	Fixed O-ring seal reduces the potential for craft error during the closure sealing process. Innovate latching mechanism provides for simple re-entry into closure by lifting the dome lid away from the base.





Multiple Solutions for Your Needs

3M designs a variety of sizes, and configuration options so that our 3M™ Fiber Dome Closures can be used in almost every segment of the network. A single product family meets a range of needs.

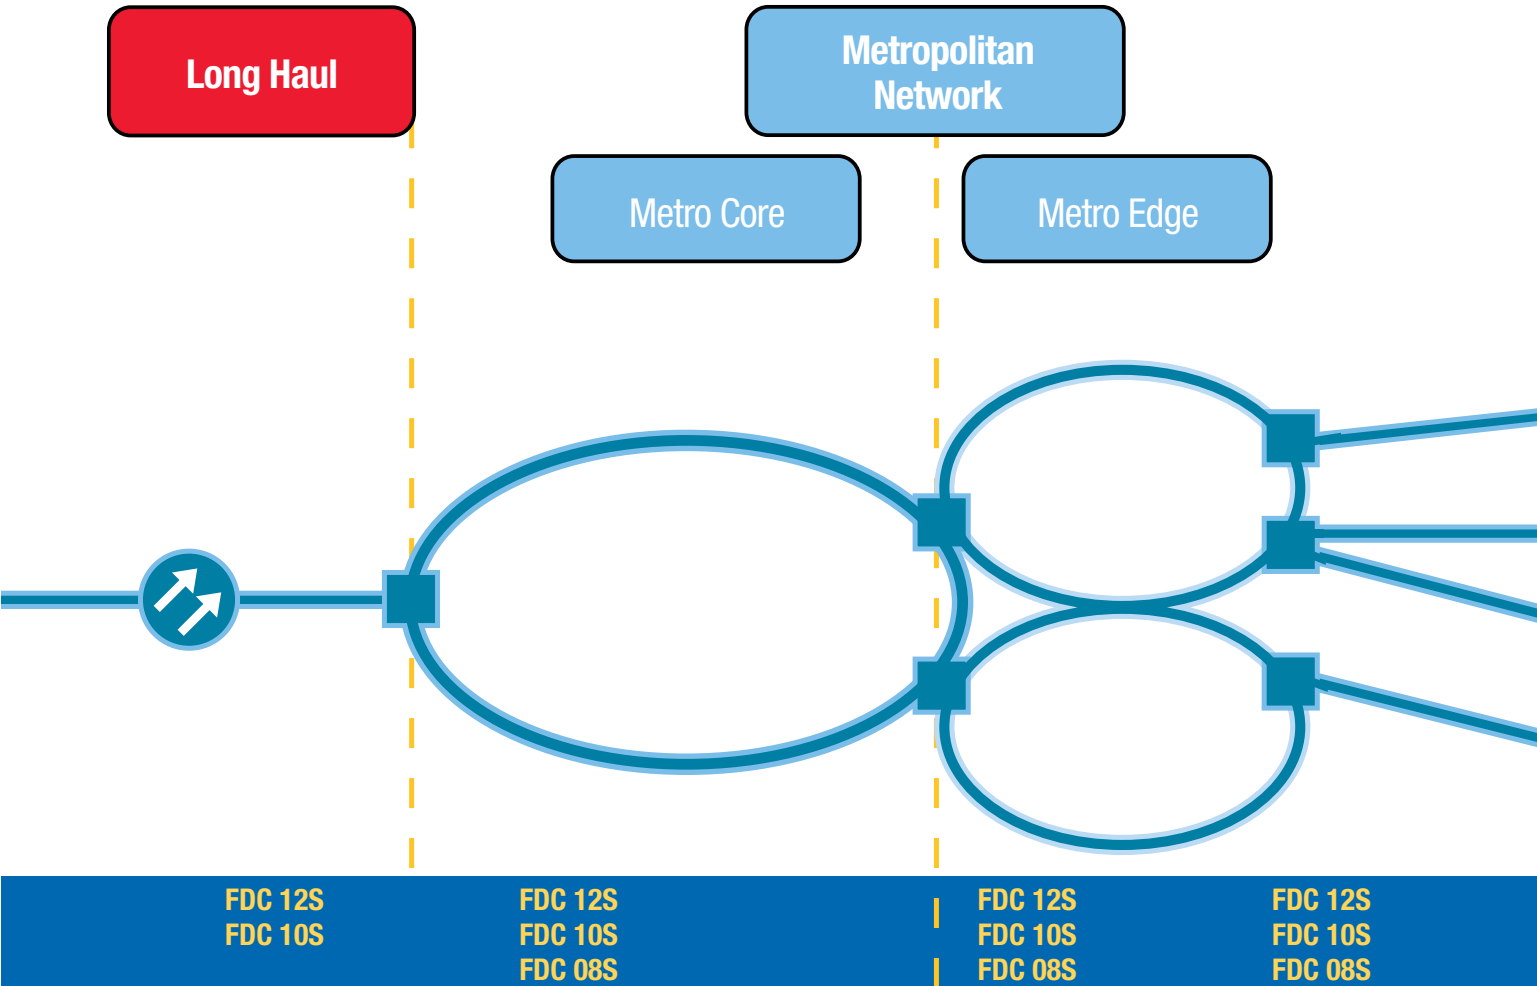

Flexible Environmental Applications within the Physical-Media Layer

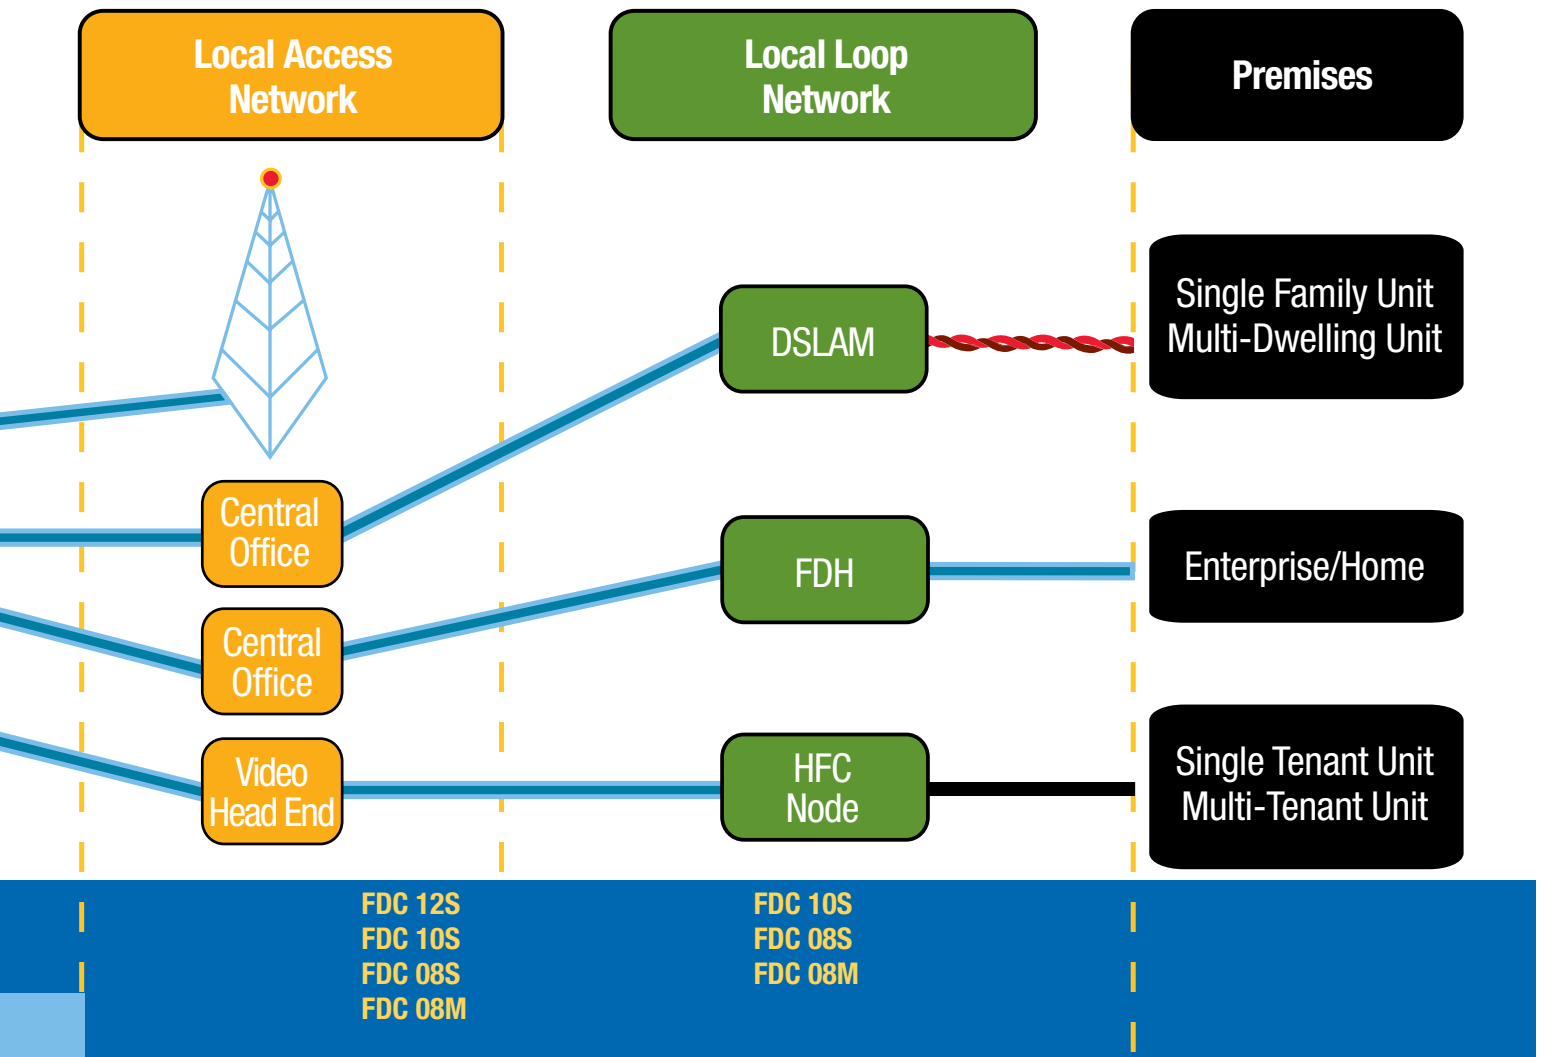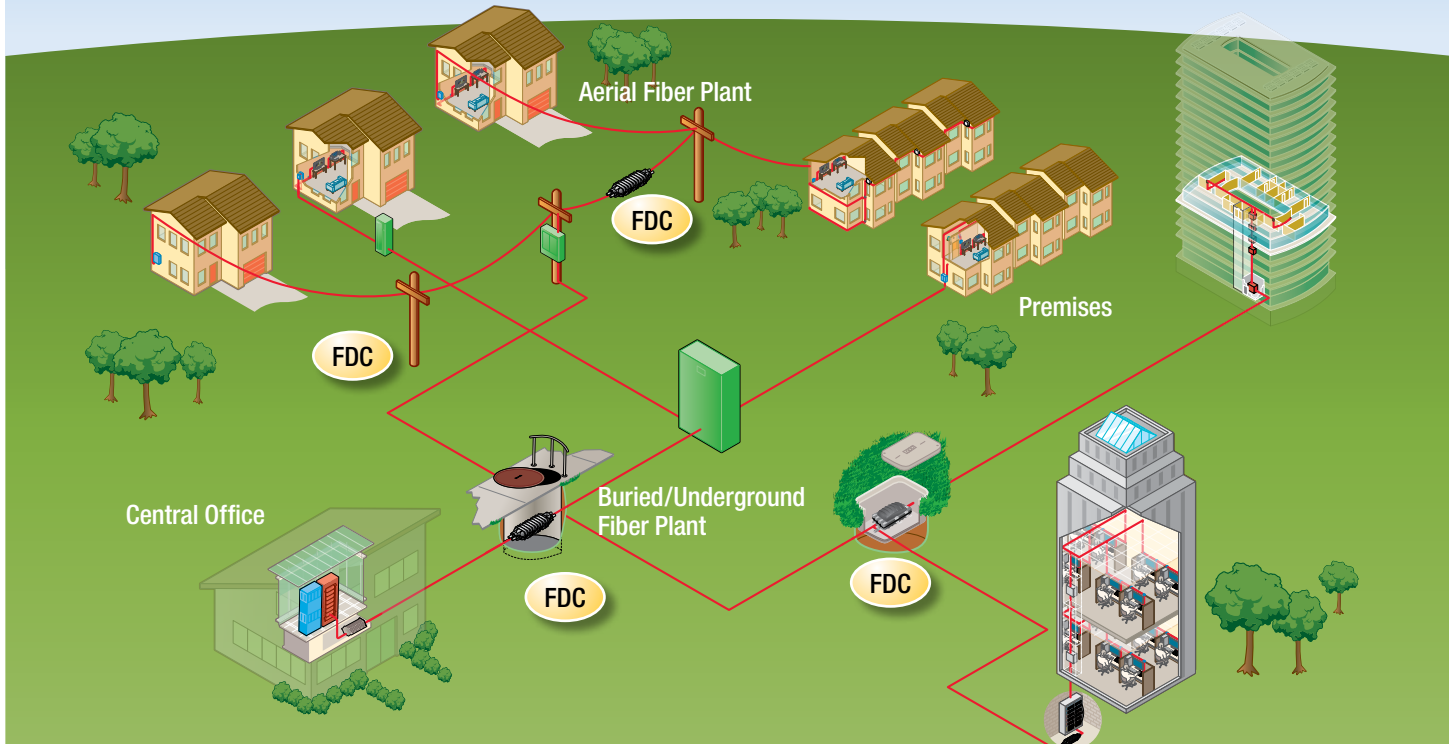

3M™ Fiber Dome Closure Family

MULTIPLE SOLUTIONS FOR EVOLVING NETWORKS.

The 3M Fiber Dome Closure family provides multiple real-world solutions with five key aspects.

A Complete Product Family

The 3M™ Fiber Dome Closure family includes five distinct sizes that fit most butt/branch splicing configurations, environment, or application. Because they are constructed of a highly chemical-resistant material, they can be deployed in most environments: buried, underground, and aerial. Their compact design allows the FDCs to be placed in the smallest pedestals and handholes.

ECAM Port Design

The 3M™ External Cable Assembly Module (ECAM) allows true plug-and-play capability, which can reduce installation and labor costs because the cable preparation and installation are completed outside of the closure body.

Built-in Cable Entry Termination System

This system allows the technician to add and remove cables from the closure without breaking the cable seals of previously installed cables.

Built-in Integral Multipurpose Fiber Storage System

The 3M Fiber Dome Closures have a separate area for sorting, routing, protecting and "expressing" buffer tubes, single and ribbon fibers.

Hinged Tray with Modular Splice Holders

The hinged trays allow easy access to fibers/splices without removing other trays. The modular splice holder design allows the trays to accommodate various fiber splice types: 2.4 mm and 3.0 mm single fusion, 12-fiber mass fusion and 3M™ Fibrlok™ Fiber Splices.

Simple, Error-free Closure Sealing and Re-entry System

A fixed O-ring seal reduces the potential for craft error during the closure sealing process. Innovative latching mechanism provides for simple re-entry into closure by lifting the dome lid away from the base



ECAM Port Design and Built-in Cable Entry Termination System



Built-in Integral Multipurpose Fiber Storage System and Hinged Tray with Modular Splice Holders




Simple, Error-free Closure Sealing and Re-entry System



3M™ Fiber Dome Closure Family

	Dimensions (L x H (dia.) x W) mm (in.)	Cable Entry Ports & Size (maximum)	Cable Entry Ports & Size (maximum)	Splice Capacity (maximum)	Splice Trays	Ground Studs (# of feed-thru studs)
Fiber Dome FDC 08M-A	385 x 182 x 152 (15.2 x 7.2 x 6.0)	Round Ports: 8 8: 12 mm (0.47 in.)	Oval Ports: 1 20 mm (0.79 in.) *for express applications	SF: 72 MF: 144	2539 2540	0 or 1
Fiber Dome FDC 08S-A	541 x 182 x 152 (21.3 x 7.2 x 6.0)	Round Ports: 8 8: 12 mm (0.47 in.)	Oval Ports: 1 27 mm (1.06 in.) *for express applications	SF: 96 MF: 288	2538 2539 2540	0 or 1
Fiber Dome FDC 08S-B	541 x 182 x 152 (21.3 x 7.2 x 6.0)	Round Ports: 3 1: 12 mm (0.47 in.) 2: 18 mm (0.71 in.)	Oval Ports: 1 20 mm (0.79 in.) *for express applications	SF: 96 MF: 288	2538 2539 2540	0, 3, or 5
Fiber Dome FDC 08S-C	541 x 182 x 152 (21.3 x 7.2 x 6.0)	Round Ports: 5 1: 12 mm (0.47 in.) 4: 18 mm (0.71 in.)	NA	SF: 96 MF: 288	2538 2539 2540	0, 3, or 5
Fiber Dome FDC 10S-D	548 x 255 (21.6 x 10.1)	Round Ports: 5 5: 18 mm (0.71 in.)	Oval Ports: 1 27 mm (1.06 in.) *for express applications	SF: 288 MF: 432	2541	0, 3, or 7
Fiber Dome FDC 10S-E	548 x 255 (21.6 x 10.1)	Round Ports: 7 7: 18 mm (0.71 in.)	NA	SF: 288 MF: 432	2541	0, 3, or 7
Fiber Dome FDC 12S-F	658 x 335 (25.9 x 13.2)	Round Ports: 5 4: 27 mm (1.06 in.)	Oval Ports: 1 27 mm (1.06 in.) *for express applications	SF: 576 MF: 864	2542	0, 3, 7, or 9

3M™ Fiber Dome Closure: FDC 08M

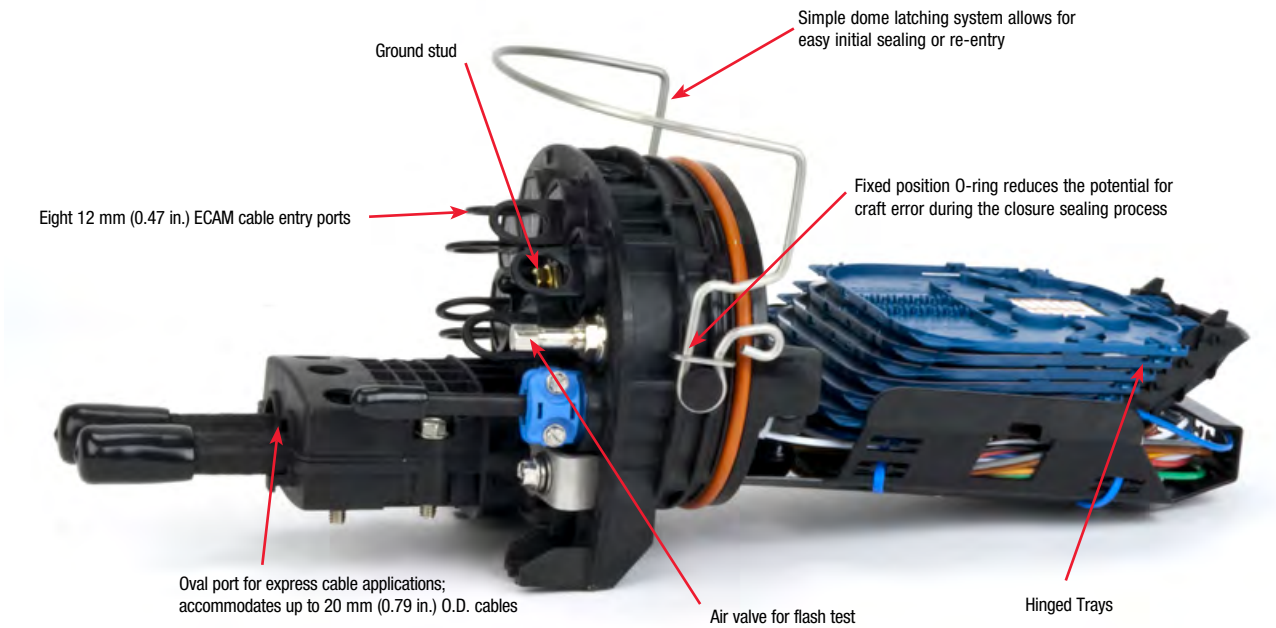

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm



3M™ External Cable Assembly Module (ECAM) Cable Entry Port 18 mm



3M™ Fiber Dome Closure FDC 08M-A



3M™ Fiber Dome Closure FDC 08M-B port layout

Specifications

	FDC 08M-A	FDC 08M-B
Dimensions (L x H x W) mm (in.)	385 x 182 x 152 (15.2 x 7.2 x 6.0)	385 x 182 x 152 (15.2 x 7.2 x 6.0)
Cable Entry Ports & Cable Size	Round ports: 8 Round Cable 4 - 12 mm (0.15 - 0.47 in.) O.D. Oval ports: 1 for 2 express cables 8 - 20 mm (0.31 - 0.79 in.) O.D.	Round ports: 3 1: 4 - 12 mm (0.15 - 0.47 in.) O.D. 2: 5 - 18 mm (0.20 - 0.71 in.) O.D. Oval ports: 1 for 2 express cables 6.5 - 27 mm (0.26-1.06 in.) O.D.
Splice Capacity	SF: 48/72 MF: 144	SF: 48/72 MF: 144




3M™ Fiber Optic Splice Tray 2540



3M™ Fiber Optic Splice Tray 2539

3M™ Fiber Dome Closure: FDC 08S

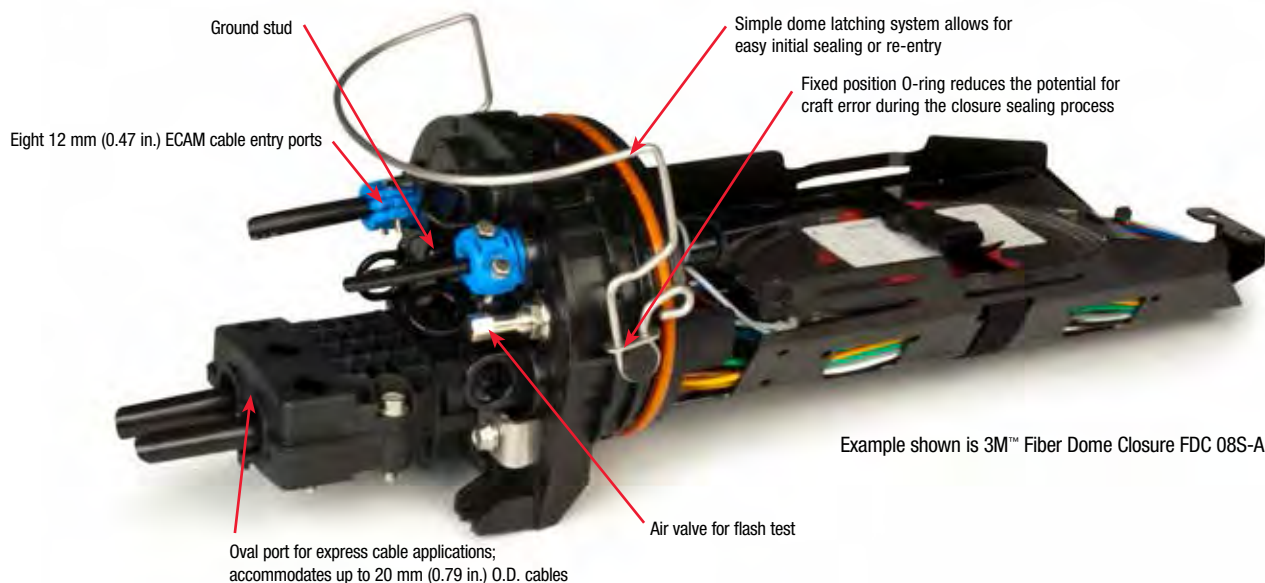

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm



3M™ External Cable Assembly Module (ECAM) Cable Entry Port 18 mm



3M™ Fiber Dome Closure FDC 08S-A port layout



3M™ Fiber Dome Closure FDC 08S-B port layout

Specifications

	FDC 08S-A	FDC 08S-B	FDC 08S-C
Dimensions (L x H x W) mm (in.)	541 x 182 x 152 (21.3 x 7.2 x 6.0)	541 x 182 x 152 (21.3 x 7.2 x 6.0)	541 x 182 x 152 (21.3 x 7.2 x 6.0)
Cable Entry Ports & Cable Size	Round ports: 8 Round Cable 4 - 12 mm (0.15 - 0.47 in.) O.D. Flat Cable 8.5 x 4.3 mm (0.33 x 0.17 in.) Oval ports: 1 for 2 express cables 8 - 20 mm (0.31 - 0.79 in.) O.D.	Round ports: 3 1: 4 - 12 mm (0.15 - 0.47 in.) O.D. 2: 5 - 18 mm (0.20 - 0.71 in.) O.D. Oval ports: 1 for 2 express cables 6.5 - 27 mm (0.26 - 1.06 in.) O.D.	Round Ports: 5 1: 4 - 12 mm (0.15 - 0.47 in.) O.D. 4: 5 - 18 mm (0.20 - 0.71 in.) O.D. NA
Splice Capacity	SF: 96 MF: 288	SF: 96 MF: 288	SF: 96 MF: 288



3M™ Fiber Optic Splice Tray 2540




3M™ Fiber Optic Splice Tray 2539



3M™ Fiber Optic Splice Tray 2538

3M™ Fiber Dome Closure FDC 10S

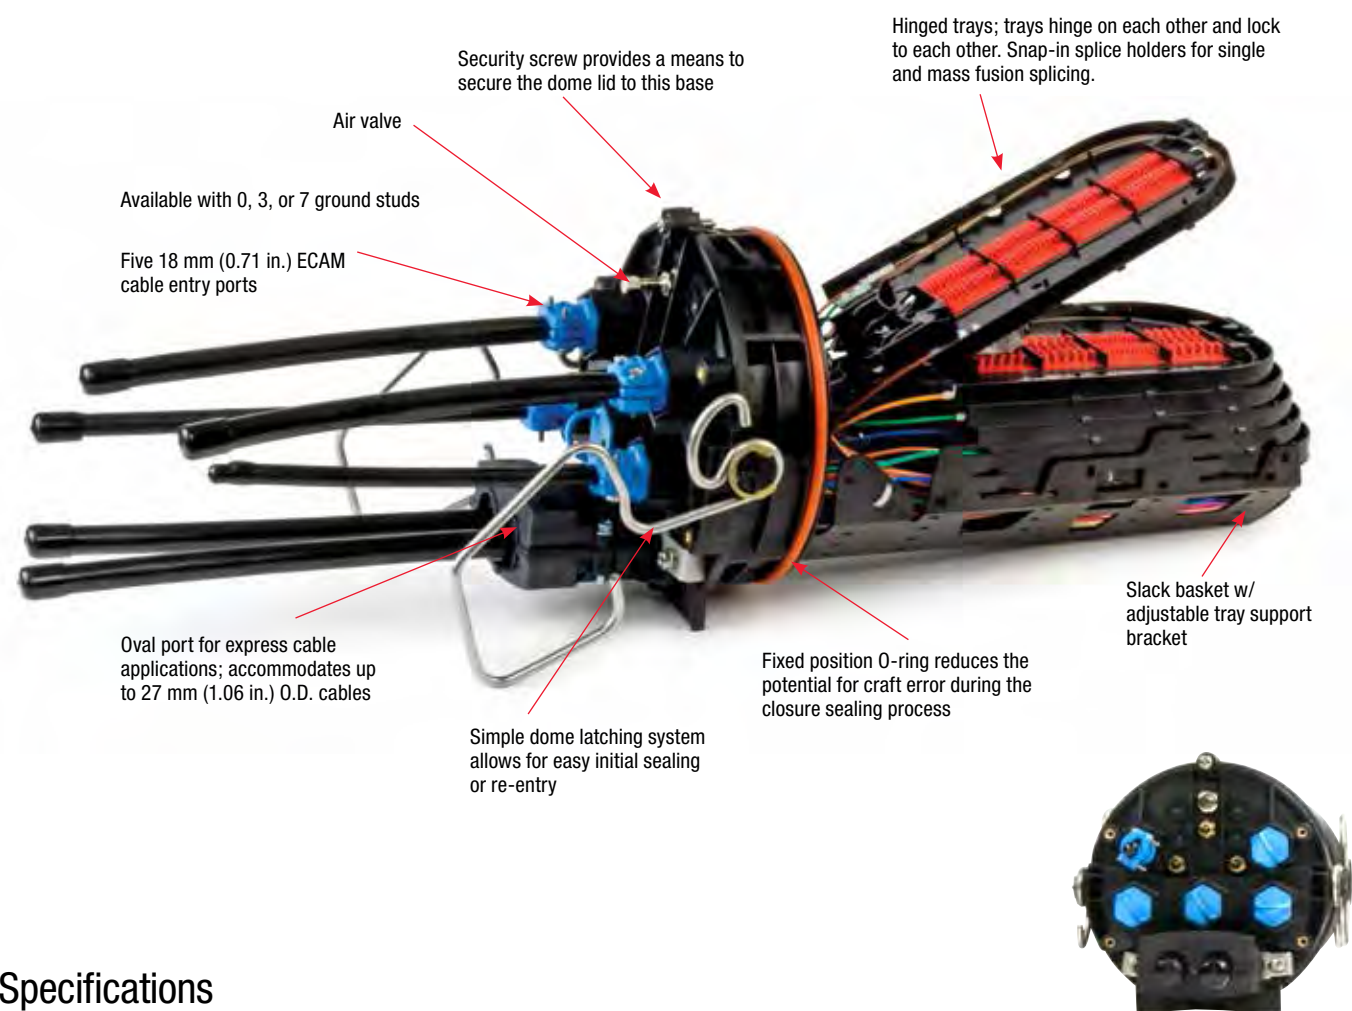

Specifications

Features	FDC 10S-D	FDC 10S-E
Dimensions L x H (dia.) mm (in.)	549 x 257.0 (21.6 x 10.1)	547.8 x 257.0 (21.6 x 10.1)
Cable entry ports & size	Round ports: 5 5 - 18 mm (0.20 - 0.71 in.) Oval ports: 1 for 2 express cables 6.5 - 27 mm (0.26 - 1.06 in.) O.D. *for express applications	Round ports: 7 5 - 18 mm (0.20 - 0.71 in.) NA
Splice capacity	SF: 288 MF: 432	SF: 288 MF: 432



3M™ Fiber Dome Closure
FDC 10S-D port layout



3M™ Fiber Splice Organizer 2541,
144 Mass Fusion Splices, 12 Ribbon
Fiber



3M™ Fiber Splice Organizer 2541,
48 Single 2.4 mm Fusion Splices




3M™ Fiber Splice Organizer 2541,
48 Single 3.0 mm Fusion Splices



3M™ External Cable Assembly Module
(ECAM) Cable Entry Port 18 mm

3M™ Fiber Dome Closure FDC 12S

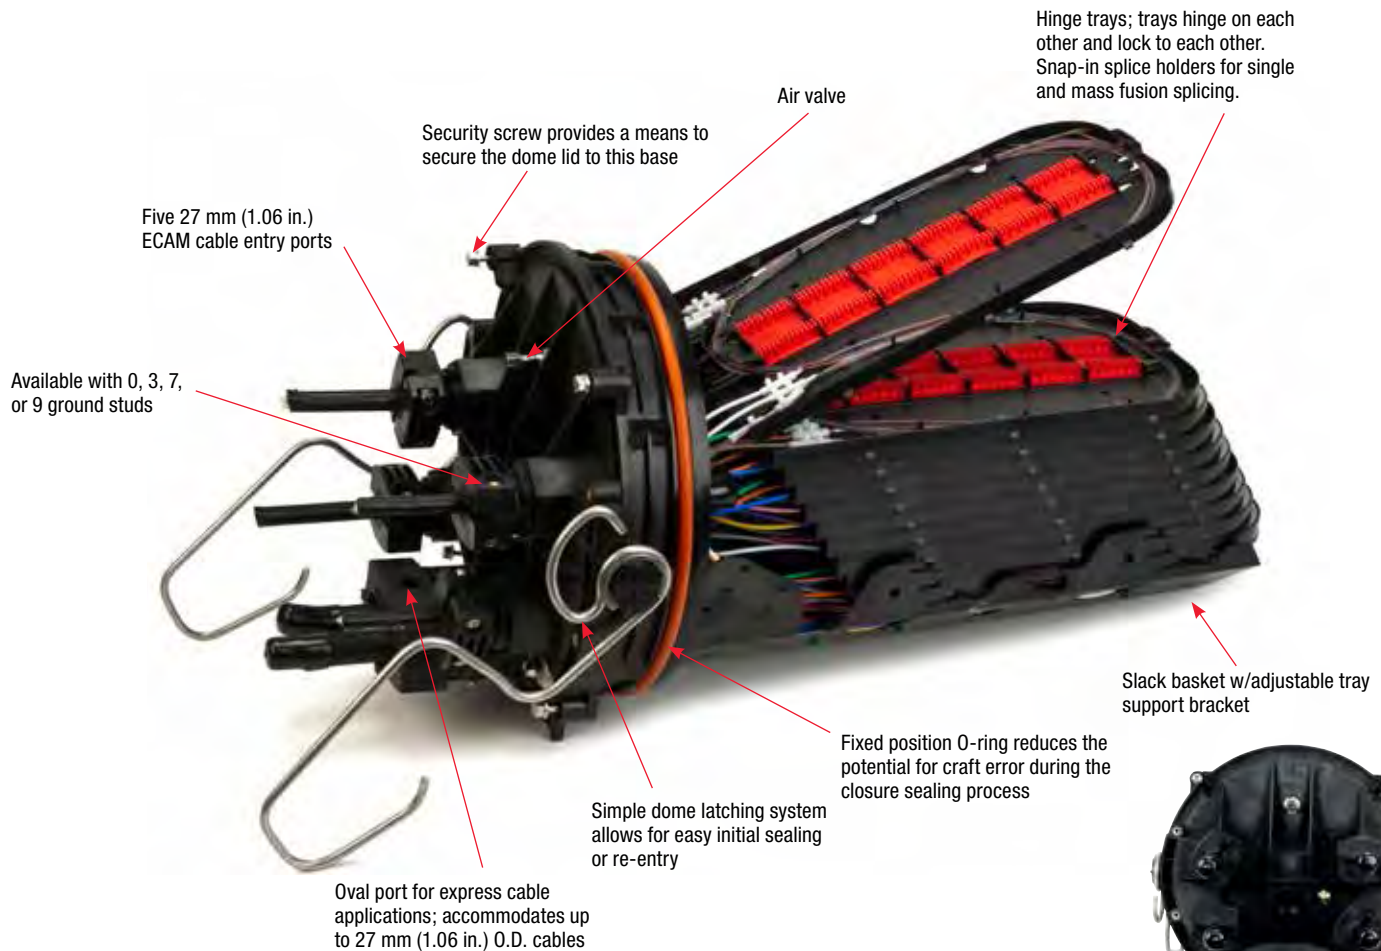

3M™ Fiber Dome Closure FDC 12S port layout

Specifications

Features	FDC 12S-F
Dimensions L x H (dia.) mm (in.)	658 x 335 (25.9 x 13.2)
Cable entry ports & size	Round ports: 5 5 - 27 mm (0.14 - 1.06 in.) Oval ports: 1 for 2 express cables 6.5 - 27 mm (0.26 - 1.06 in.) O.D.
Splice capacity	SF: 576 MF: 864



3M™ Fiber Splice Organizer 2542, 72 Single 2.4 mm Fusion Splices



3M™ Fiber Splice Organizer 2542, 288 Mass Fusion Splices, 12 Ribbon Fiber



3M™ Fiber Splice Organizer 2542, 72 Single 3.0 mm Fusion Splices




3M™ External Cable Assembly Module (ECAM) Cable Entry Port 27 mm-S

3M™ Fiber Dome Closure FDC Family Ordering Information

3M™ FIBER OPTIC SPLICE CLOSURE FIBER DOME FAMILY CONFIGURATIONS

PRODUCT NBR	Product Description	3M ID	UPC	Oval Port Size	
FDC 08M					
FDC-08M-A-N0N-02B-A	FDC 08M-A with 1-20 mm double port & kit, 8-12 mm ports & 0 kits, 1 ground, 2539 tray (2)	80-6113-3084-8	0-00-51115-06056-4	20	
FDC-08M-A-N1N-01C-A	FDC 08M-A with 1-20 mm double port & kit, 8-12 mm ports & 1 kits, 1 ground, 2540 tray (1)	80-6113-3157-2	0-00-51115-06129-5	20	
FDC-08M-A-N0N-01C-A	FDC 08M-A with 1-20 mm double port & kit, 8-12 mm ports & 0 kits, 1 ground, 2540 tray (1)	80-6113-3085-5	0-00-51115-06057-1	20	
FDC-08M-B-N0N-01C-C	FDC 08M-B with 1-27 mm double port & kit, 2-18 mm ports & 0 kits, 1-12 mm ports & 0 kits, 0 grounds, 2540 tray (1)	80-6114-8195-5	0-00-51115-67760-1	27	
FDC 08S					
FDC-08S-A-N0N-01A-A	FDC 08S-A with 1-20 mm double port & kit, 8-12 mm ports & 0 kits, 1 ground, 2538 tray (1)	80-6113-3086-3	0-00-51115-06058-8	20	
FDC-08S-B-N00-01A-N	FDC 08S-B with 1-27 mm double port & kit, 2-18 mm ports & 0 kits, 1-12 mm ports & 0 kits, 0 grounds, 2538 tray (1)	80-6113-8026-4	0-00-51115-54086-8	27	
FDC-08S-B-N10-01A-C	FDC 08S-B with 1-27 mm double port & kit, 2-18 mm ports & 0 kits, 1-12 mm ports & 1 kit, 3 grounds, 2538 tray (1)	80-6113-8027-2	0-00-51115-54087-5	27	
FDC-08S-B-N00-02B-E	FDC 08S-B with 1-27 mm double port & kit, 2-18 mm ports & 0 kits, 1-12 mm ports & 0 kits, 5 grounds, 2539 tray (2)	80-6113-8028-0	0-00-51115-54088-2	27	
FDC-08S-B-N00-01A-C	FDC 08S-B with 1-27 mm double port & kit, 2-18 mm ports & 0 kits, 1-12 mm ports & 0 kits, 3 grounds, 2538 tray (1)	80-6113-3477-4	0-00-51115-53557-4	27	
FDC-08S-C-N02-01A-C	FDC 08S-C with 4-18 mm ports & 2 kits, 1-12 mm ports & 0 kits, 3 grounds, 2538 tray (1)	80-6113-2205-0	0-00-51115-22826-1	na	
FDC 10S					
FDC-10S-D-NN0-01F-C	FDC 10 with 1-27 mm double port & kit, 5-18 mm ports & 0 kits, 3 grounds, 2541-48-SF-3.0 mm tray (1)	80-6113-3478-2	0-00-51115-53558-1	27	
FDC-10S-D-NN2-01F-C	FDC 10 with 1-27 mm double port & kit, 5-18 mm ports & 2 kits, 3 grounds, 2541-48-SF-3.0 mm tray (1)	80-6113-2956-8	0-00-51115-30210-7	27	
FDC-10S-E-NN4-03F-E	FDC 10 with 7-18 mm ports & 4 kits, 5 grounds, 2541-48-SF-3.0 mm tray (3)	80-6113-3140-8	0-00-51115-06112-7	na	
FDC-10S-D-NN0-01F-G	FDC 10 with 1-27 mm double port & kit, 5-18 mm ports & 0 kits, 7 grounds, 2541-48-SF-3.0 mm tray (1)	80-6113-3075-6	0-00-51115-06047-2	27	
FDC-10S-D-NN2-01G-N	FDC 10 with 1-27 mm double port & kit, 5-18 mm ports & 2 kits, 0 grounds, 2541-144-SF/MF-12RF Tray(1)	80-6113-2957-6	0-00-51115-30211-4	27	
FDC-10S-D-NN0-00N-C	FDC 10 with 1-27 mm double port & kit, 5-18 mm ports & 0 kits, 3 grounds, no tray	80-6113-2958-4	0-00-51115-30212-1	27	
FDC 12S					
FDC 12S-F-2NN-01H-C	FDC 12 with 1-27 mm double port & kit, 5-27 mm ports & 2 kits, 3 grounds, 2542-72-SF-2.4 mm tray (1)	80-6113-3219-0	0-00-51115-06191-2	27	
FDC 12S-F-2NN-01J-C	FDC 12 with 1-27 mm double port & kit, 5-27 mm ports & 2 kits, 3 grounds, 2542-72-SF-3.0 mm tray (1)	80-6113-3221-6	0-00-51115-06193-6	27	
FDC 12S-F-2NN-01K-C	FDC 12 with 1-27 mm double port & kit, 5-27 mm ports & 2 kits, 3 grounds, 2542-288-MF tray (1)	80-6113-3223-2	0-00-51115-06195-0	27	

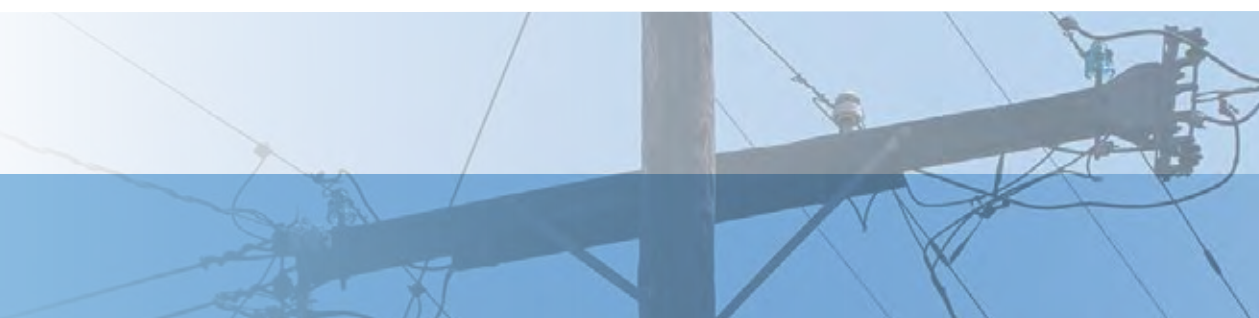

	Oval Port Kits	12 mm Round Ports	12 mm Round Ports Kits	18 mm Round Ports	18 mm Round Ports Kits	27 mm Round Ports	27 mm Round Ports Kits	GND Studs	Type of GND Kit	# of GND Kits	Type of Tray	# of Trays
	1	8	0	na	0	na	0	1	na	0	2539	2
	1	8	1	na	0	na	0	1	na	0	2540	1
	1	8	0	na	0	na	0	1	na	0	2540	1
	1	1	0	2	0	na	0	3	na	0	2540	1
	1	8	0	na	0	na	0	1	na	0	2538	1
	1	1	0	2	0	na	0	0	na	0	2538	1
	1	1	1	2	0	na	0	3	na	0	2538	1
	1	1	0	2	0	na	0	5	na	0	2539	2
	1	1	0	2	0	na	0	3	na	0	2538	1
	0	1	0	4	2	na	0	3	na	0	2538	1
	1	na	0	5	0	na	0	3	na	0	2541	1
	1	na	0	5	2	na	0	3	na	0	2541	1
	1	na	0	5	4	na	0	5	na	0	2541	3
	1	na	0	5	0	na	0	7	na	0	2541	1
	1	na	0	5	2	na	0	0	na	0	2541	1
	1	na	0	5	0	na	0	3	na	0	2541	1
	1	na	0	na	0	5	0	3	na	0	2541	1
	1	na	0	na	0	5	0	3	na	0	2542	1
	1	na	0	na	0	5	0	3	na	0	2542	1







3M™ Fiber Dome Closure Accessories

SPLICE TRAYS

	PRODUCT NUMBER/ PACKAGING INFO	DESCRIPTION
	2539-12-SF PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-19209-8	Fiber Optic Splice Tray with 12 Single Fusion Splices Hinged tray that accommodates 12 single fusion splices. Only for FDC 08M and FDC 08S closures. 2.4 mm x 60 mm single fusion heat shrink sleeves required (2171 or equivalent).
	2540-12-SF/36-MF PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-19210-4	Fiber Optic Splice Tray with 12 Single/36 Mass Fusion Splices Hinged tray that accommodates up to 12 single fusion and 36 mass fusion splices. Only for FDC 08M and FDC 08S closures. 2.4 mm x 60 mm single fusion heat shrink sleeves required (2171 or equivalent).
	2541-24-FL-1 PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51128-83939-3	Fiber Optic Splice Tray with 3M™ Fibrlok™ Splice Inserts Hinged fiber splice organizer tray that includes two splice inserts for 3M™ Fibrlok™ Splices (six splices per insert) Only for FDC 10 closures.
	2540M-12-SF/36-MF PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51111-95334-1	Fiber Optic Splice Tray with 12 Single/36 Mass Fusion Splices Hinged metal tray that accommodates up to 12 single fusion and 36 mass fusion splices. For use with FDC 08M and FDC 08S closures. 3.0 mm x 60 mm single fusion heat shrink sleeves required (2170 or equivalent).
	2541-144-MF-12RF PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-30209-1	Fiber Optic Splice Tray with 144 Mass Fusion Splices, 12 Ribbon Fiber Hinged fiber splice organizer tray that accommodates 144 mass fusion splices. Only for FDC 10 closures.
	2541-48-SF-2.4MM PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-30207-7	Fiber Optic Splice Tray with 48 Single 2.4 mm Fusion Splices Hinged fiber splice organizer tray that accommodates 48 single 2.4 mm fusion splices. Only for FDC 10 closures.
	2541-48-SF-3.0MM PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-30208-4	Fiber Optic Splice Tray with 48 Single 3.0 mm Fusion Splices Hinged fiber splice organizer tray that accommodates 48 single 3.0 mm fusion splices. Only for FDC 10 closures.
	2542-288-MF-12RF PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-06198-1	Fiber Optic Splice Tray with 288 Mass Fusion Splices, 12 Ribbon Fiber Hinged fiber splice organizer tray that accommodates 288 mass fusion splices. Only for FDC 12 closures.
	2542-72-SF-2.4MM PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-06196-7	Fiber Optic Splice Tray with 72 Single 2.4 mm Fusion Splices Hinged fiber splice organizer tray that accommodates 72 single 2.4 mm fusion splices. Only for FDC 12 closures.
	2542-72-SF-3.0MM PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-06197-4	Fiber Optic Splice Tray with 72 Single 3.0 mm Fusion Splices Hinged fiber splice organizer tray that accommodates 72 single 3.0 mm fusion splices. Only for FDC 12 closures.
	2538-24-SF/72-MF PKG: 12 PKGS MIN. ORDER: 12 PKGS. UPC: 0-00-51115-19208-1	Fiber Optic Splice Tray with 24 Single/72 Mass Fusion Splices Stackable fiber splice organizer tray that accommodates 24 single or 72 mass fusion.

3M™ Fiber Dome Closure Accessories

SPLICE TRAYS (CONTINUED)

	PRODUCT NUMBER/ PACKAGING INFO	DESCRIPTION
	2170 PKG: 50 EACH (0.10) MIN. ORDER: 50 EACH UPC: 0-00-54007-17676-3	Fiber Optic Splice Sleeve, 3.0 mm x 60 mm Transparent plastic tube and stainless steel rod designed to prevent stress and protect fusion fiber optic splices in field and factory operations.
	2171 PKG: 50 EACH MIN. ORDER: 50 EACH UPC: 0-00-51115-14547-6	Fiber Optic Splice Sleeve, 2.4 mm x 60 mm Transparent plastic tube and stainless steel rod designed to prevent stress and protect fusion fiber optic splices in field and factory operations.
	2518-F0-LBT-2MM-TUBE-KIT PKG: 6 EACH MIN. ORDER: 6 EACH UPC: 0-00-51115-26076-6	Fiber Transition Tube Kit for Loose Buffer Tube The 2518 Kit is a 2 mm fiber transition tube kit for loose buffer tube cables. It is used to transition the fibers from the splice closure slack storage area to the splice tray.
	2519 PKG: 10 KITS MIN. ORDER: 10 KITS UPC: 0-00-51138-57722-3	Cable Fanout Kit Transitions cable buffer tubes or single tube to fiber tube.
	2519-X PKG: 10 KITS MIN. ORDER: 10 KITS UPC: 0-00-51138-57723-0	Cable Fanout Expander Kit Transitions one fiber tube to two fiber tubes.
	2520 PKG. (LBS.): 50 EACH (0.90) MIN. ORDER: 50 EACH UPC: 0-00-51138-36414-4	Fiber Tube Transition Tubing, 1 ft Protects single or four 12-fiber ribbons between trays; cut in one-foot lengths.
	2520-3FT PKG: 24 EACH MIN. ORDER: 24 EACH UPC: 0-00-51138-36647-6	Fiber Tube Transition Tubing, 3 ft Protects single or four 12-fiber ribbons between trays; cut in three-foot lengths.
	2520-100FT PKG: 1 EACH MIN. ORDER: 1 EACH UPC: 0-00-51115-26078-0	Fiber Tube Transition Tubing, 100 ft Protects single or four 12-fiber ribbons between trays. Sold in a 100 ft. roll.
	2521-F PKG: 12 PKGS. MIN. ORDER: 12 PKGS. UPC: 0-00-51138-36412-0	Fusion Splice Insert, 2 Pack Holds 12 single fusion splices in each insert, used in 3M™ Fiber Splice Organizer Trays 2538 3.0 mm x 60 mm single fusion heat shrink sleeve required (2170 or equivalent).
	2521-FL PKG: 12 PKGS. MIN. ORDER: 12 PKGS. UPC: 0-00-51138-36413-7	3M™ Fibrlok™ Splice Insert, 2 Pack Holds six Fibrlok or mass fusion splices in each insert, used in 2538 trays. Accommodates single ceramic rod 12 fiber mass fusion sleeves or double ceramic rod 4 to 6 fiber mass fusion sleeves.

3M™ Fiber Dome Closure Accessories

EXTERNAL CABLE ASSEMBLY MODULES



ECAM-12MM

PKG: 8 EACH
MIN. ORDER: 8 EACH
UPC: 0-00-51115-19190-9

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm

Single ECAM cable entry kit that accommodates one round fiber optic cable with an outside diameter from 0.15 - 0.47 in. (4 - 12 mm) or one or two flat drop cables. For FDC 08M-A, FDC 08S-A and FDC 08S-B.



ECAM-12MM-S-ACT

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-67016-9

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm Single ACT

Single ECAM cable entry kit that accommodates one armored central tube fiber optic cable with an outside diameter from 0.15 to 0.47 in. (4 to 12 mm). For FDC 08M and FDC 08S.



ECAM-12MM-FLAT-US

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-26091-9

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm FLAT

Single ECAM cable entry kit that accommodates one or two flat drop cables. For FDC 08M and FDC 08S.



ECAM-12MM-FRP

PKG: 4 EACH
MIN. ORDER: 8 EACH
UPC: 0-00-51115-26092-6

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm FRP

Single ECAM cable entry kit that accommodates four FRP drop cables. For FDC 08M and FDC 08S.



ECAM-12MM-MF-US

PKG: 4 EACH
MIN. ORDER: 8 EACH
UPC: 0-00-51115-53701-1

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm MINIFLEX DUCT

Single ECAM cable entry kit that accommodates 8mm miniflex duct. For FDC 08M and FDC 08S.



ECAM-12MM-RND-5/8MM/12MM

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-30244-2

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 12 mm RND

Single ECAM cable entry kit that accommodates 5 - 8 mm round drop cables. For FDC 08M and FDC 08S.



ECAM-18MM-S-ACT

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51111-95483-6

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 18 mm Single ACT

Single ECAM cable entry kit that accommodates one armored central tube fiber optic cable with an outside diameter from 0.20 to 0.71 in. (5 to 18 mm). For FDC 08M, FDC 08S-B and FDC 10.



ECAM-18MM-S

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-30204-6

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 18 mm Single

Single ECAM cable entry kit that accommodates one fiber optic cable with an outside diameter from 0.20 - 0.71 in. (5 - 18 mm). For FDC 08S-B and FDC 10.



ECAM-18MM-2RC

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-54017-2

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 18 mm-2RC

Single ECAM cable entry kit that accommodates two round fiber optic cables with an outside diameter of 0.29 in. For FDC 08S-B and FDC 10.

3M™ Fiber Dome Closure Accessories

EXTERNAL CABLE ASSEMBLY MODULES (CONTINUED)



ECAM-18MM-MFC

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-53874-2

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 18 mm-MFC

Single ECAM cable entry kit that accommodates three flat drop cables. For FDC 08S-B and FDC 10.



ECAM-20MM-D

PKG: 5 EACH
MIN. ORDER: 5 EACH
UPC: 0-00-51115-30205-3

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 20 mm Double

Double cable entry kit (DECAM) that accommodates two fiber optic cables up to 0.79 in. (20 mm) outside diameter. For FDC 08M-A and FDC 08S-A.



ECAM-27MM-S

PKG: 2 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-30203-9

3M™ External Cable Assembly Module (ECAM) Cable Entry Port 27 mm Single

Single ECAM cable entry kit that accommodates one fiber optic cable with an outside diameter from 0.45 - 1.06 in. (11.5 to 27 mm). For FDC 12 only.

GROUNDING



25T-BBE6

PKG: 1 EACH
MIN. ORDER: 1 EACH
UPC: 0-00-54007-32671-7

Bond Braid

With 6" eyelets.



4460-D

PKG: 100 EACH
MIN. ORDER: 100 EACH
UPC: 0-00-54007-71217-6

3M™ Scotchlok™ Shield Bond Connector Assembly

Provides grounding for armored fiber cables.

Flexibility
built in for growing
networks

3M™ Fiber Dome Closure Accessories

GROUNDING (CONTINUED)



4460-D/FO

PKG: 100 EACH
MIN. ORDER: 100 EACH
UPC: 0-00-54007-92757-0

3M™ Scotchlok™ Shield Bond Connector Assembly

Provides grounding for armored fiber cables.



ECAM-GND-14-AWG

PKG: 100 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-19198-5

ECAM Cable Ground (14 AWG)

14 Gauge Ground Kit



ECAM-GND-6-AWG

PKG: 100 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-19196-1


ECAM Cable Ground (6 AWG)

6 Gauge Ground Kit w/4460-D 3M Shield Bond Connectors

MOUNTING HARDWARE

PRODUCT NUMBER/
PACKAGING INFO

DESCRIPTION




FD-08-AERIAL-SHB

PKG: 2 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-19201-2

Aerial Strand Mount Hanger Bracket

Aerial Strand Mount Bracket for FDC 08S.



FD-08-HH-1730

PKG: 1 EACH
MIN. ORDER: 2 SETS
UPC: 0-00-51115-19200-5

Handhole Mounting Bracket for 17" x 30" Channell and Strongwell

Handhole Bracket for FDC 08S.



FDT-08-PED-CH

PKG: 2 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-19214-2

Pedestal Mounting Bracket for 10" Channel Pedestal

Channel MAH1010 Pedestal Mounting Bracket for FDC 08S and FDC 08M.



FDT-08-PED-CI

PKG: 2 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-19215-9

Pedestal Mounting Bracket for 8" Charles Ind. Pedestal

Charles Industry 8" Pedestal Mounting Bracket for FDC 08S and FDC 08M.




AC-HB4

PKG: 10 SETS
MIN. ORDER: 2 EACH 10 SETS
UPC: 0-00-51115-19068-1

Aerial Offset Hanger Bracket, 4.0"

For overhanging application.






FDST/FDT-08M-AERIAL-SHB

PKG: 2 EACH
MIN. ORDER: 2 EACH
UPC: 0-00-51115-06178-3

FDST/FDT 08M Aerial Strand Mount Hanger Bracket

Aerial Strand Mount Hanger Bracket for FDC 08M.



MOUNTING HARDWARE (CONTINUED)	
FDST/FDT-08M-POLE/ PED-HB PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-06177-6	FDST/FDT 08M Pedestal or Pole Mounting Bracket Bracket for FDC 08M and FDC 08S.
 FDC-10/12-AERIAL- SHB PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51115-06199-8	Aerial Strand Mount Hanger Bracket Aerial Strand Mount Hanger Bracket for FDC 10 and FDC 12.
 FD-08-PED- EMPF-08/10/12 PKG: 2 EACH MIN. ORDER: 2 EACH UPC: 0-00-51155-67445-5	Pedestal Mounting Bracket for 8", 10" and 12" Emerson Pedestal Emerson 8", 10" and 12" Pedestal Mounting Bracket for FDC 08S and FDC 08M.



All products contained herein are RoHS compliant. "RoHS Compliant 2002/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

3M, Fibrolok and Scotchlok are trademarks of 3M Company. All other trademarks are owned by their respective companies.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



Communication Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000
800/426 8688
Fax 800/626 0329
www.3M.com/Telecom

Please recycle. Printed in USA.
© 3M 2014. All rights reserved.
80-6113-8322-7