




THE SIGNAL FOR SUCCESS™

ADRF-BBU

Battery Backup Unit

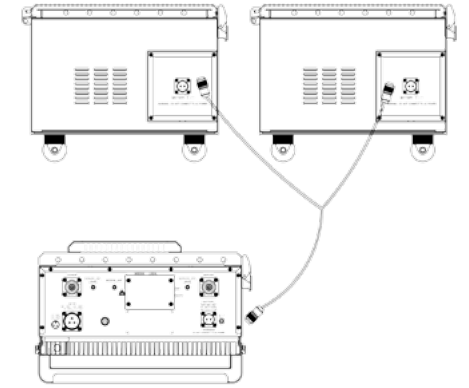

SPECIFICATIONS
VOLTAGE
CAPACITY
DIMENSION (W x H x D)
WEIGHT
BATTERY PORT
WEATHER RESISTANCE
COOLING
MOUNTING TYPE

ADRF-BBU	ADRF-BBU x 2 w/ Y-cable
24V	24V (24V x 2 batteries setup in parallel)
120AH	240AH
15.6 x 16.7 x 10.8 in	15.6 x 16.7 x 10.8 in (each ADRF-BBU)
< 195 lbs	< 195 lbs (each ADRF-BBU)
MS 3102 A 16-3P	MS 3102 A 16-3P
NEMA 4	NEMA 4
Air Convection	Air Convection
Ground (with wheel locks)*	Ground (with wheel locks)*

*Due to the weight of the unit, wall mounting is not supported

RESERVE CAPACITY
AXM700/F-9543-ICS
AXM850-9543-ICS
AXM1900-9543-ICS
AXM2100-9543-ICS
PSR78-9030 (single band)
PSR78-9030 (dual band)
ADX 4-BAND REMOTE UNIT
ADX 4-BAND HEAD END**

8.4 hours (max)	16.8 hours (max)
7.8 hours (max)	15.6 hours (max)
8.6 hours (max)	17.2 hours (max)
9.1 hours (max)	18.2 hours (max)
20.0 hours (max)	40.1 hours (max)
14.8 hours (max)	29.6 hours (max)
17.4 hours (max)	34.8 hours (max)
80.0 hours (typical)	160.0 hours (typical)

**Calculated with ADX-H-NMS-PKG, 4 RFU, and 1 ODU

Specifications are subject to change without notice. ©2015 Advanced RF Technologies, Inc.

TEL +1 818. 840. 8131 | FAX +1 818. 840. 8138
 TECHNICAL/CUSTOMER SUPPORT +1 800. 313. 9345
 www.adrftech.com | 3116 West Vanowen Street, Burbank, CA 91505 USA

