

# Ultra Megapixel Lenses

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Ultra megapixel optical resolution
- ▶ Telephoto range for details at a distance
- ▶ High-quality optics
- ▶ Reliable, robust construction


As cameras can now capture even higher picture resolutions through the use of megapixel sensor technology and advanced processing, the lenses also need to have an optical resolution that allows the camera to work at its optimal point. These lenses provide long and reliable operation with no maintenance. They are designed to provide detailed coverage at long distances in applications such as stadiums or perimeter monitoring.


## System overview

The lenses have a standard C mount for use with a variety of cameras. They deliver impressive optical quality as a result of their ultra megapixel resolution, contrast reproduction, and coating. The mechanical construction is designed to withstand the environmental stress of surveillance installations. For flexible, high-quality, reliable lenses that match a megapixel camera's performance, these lenses are the ideal solution.



## Installation/configuration notes

### Dimensions LFF-8012C-D35


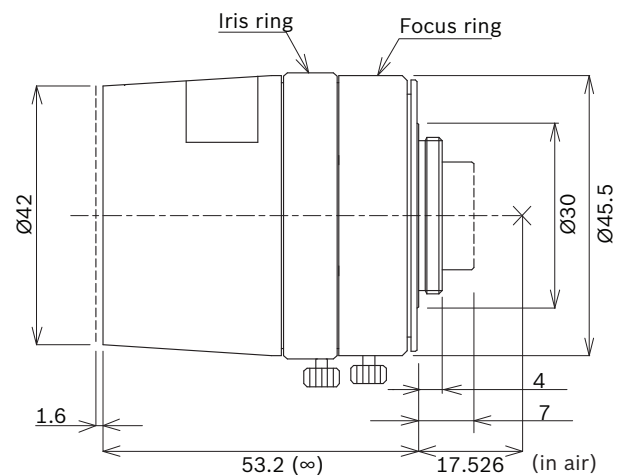


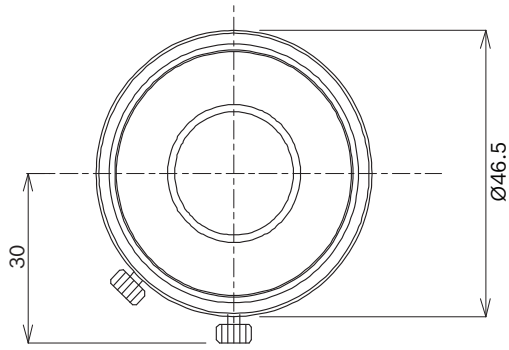

**Dimensions LFF-8012C-D50**

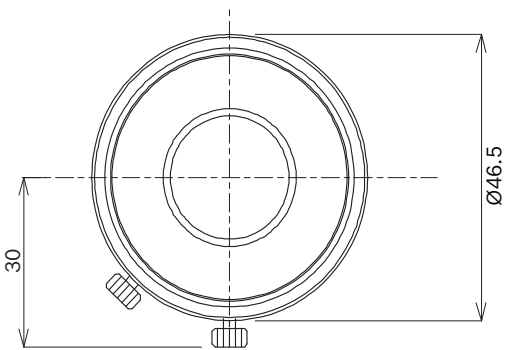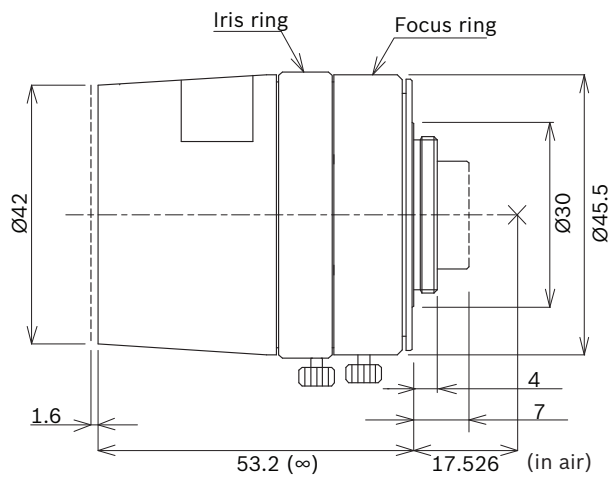

**Dimensions LFF-8012C-D75**

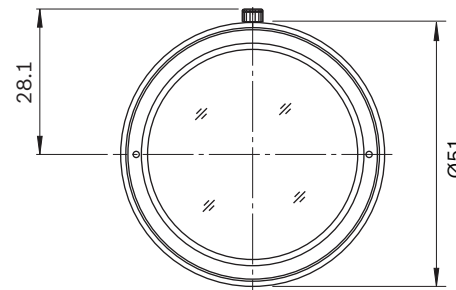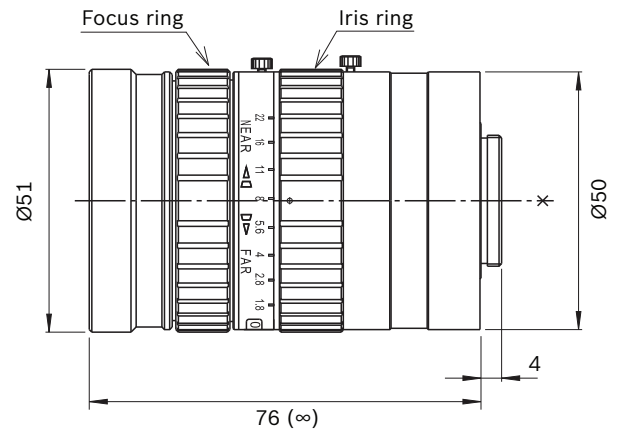

**Technical specifications**

Optical	LFF-8012C-D35	LFF-8012C-D50	LFF-8012C-D75
	Maximum sensor format	2/3-inch	2/3-inch
Focal length	35 mm	50 mm	75 mm
Iris range	F1.8, F2.8, F4, F8, F16	F2, F2.8, F4, F8, F16	F1.8, F2, F2.8, F4, F8, F16, F22
Min object distance	1 m (3.3 ft)	2 m (6.56 ft)	0.9 m (3.3 ft)
Back focal length	14.3 mm (0.56 in)	14.8 mm (0.58 in)	24.43 mm (0.96 in)
Iris control	manual	manual	manual
Focus control	manual	manual	manual
IR corrected	yes	yes	no

**Angle of view with DINION IP ultra 8000 MP (DxHxV)**

	<b>LFF-8012C-D35</b>	<b>LFF-8012C-D50</b>	<b>LFF-8012C-D75</b>
12MP mode (4:3)	12.3x9.8x7.4°	8.5x6.8x5.1°	5.9x4.7x3.6°
4K UHD mode (16:9)	10.8x9.4x5.3°	7.5x6.6x3.7°	5.2x4.5x2.6°

**Mechanical**

	<b>LFF-8012C-D35</b>	<b>LFF-8012C-D50</b>	<b>LFF-8012C-D75</b>
Weight	149 g (0.33 lb)	155 g (0.34 lb)	305 g (0.67 lb)
Dimensions	Ø 53 x 47 mm	Ø 54 x 47 mm	Ø 51 x 76 mm
Lens mount	C-mount	C-mount	C-mount

**Environmental**

Operating Temperature	-10°C to +50°C (+14°F to +122°F)
Storage Temperature	-20°C to +60°C (-4°F to + 140°F)
Operating Humidity	Up to 80% non-condensing

**Ordering information****LFF-8012C-D35 Telephoto megapixel lens**

Fixed telephoto megapixel lens ; manual iris; IR corrected; C-mount; 2/3" ; F1.8; 35mm  
Order number **LFF-8012C-D35**

**LFF-8012C-D50 Telephoto megapixel lens**

Fixed telephoto megapixel lens ; manual iris; IR corrected; C-mount; 2/3" ; F2.0; 50mm  
Order number **LFF-8012C-D50**

**LFF-8012C-D75 Telephoto megapixel lens**

Fixed telephoto megapixel lens ; manual iris; C-mount; 1/1.8" ; F1.8; 75mm  
Order number **LFF-8012C-D75**

**Represented by:**

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia