

Verifact® D-V

The Verifact® D-V is designed for vandal prone areas. The **vandal resistant** faceplate has a louver for microphone protection. In addition, the microphone element is mounted in a rigid recessed housing to prevent damage from foreign objects. The unit fits into a single gang electrical backbox (not included) for ease of installation for ceiling or wall. Flush mounting further enhances vandal resistance. The Verifact® D-V is **omni-directional** and produces line level output.







Omni-directional

Vandal Resistant

Markets

The vandal-resistant microphone is designed for correctional, educational and commercial facilities or any area where the potential for vandalism is a concern. It is typically installed in the intake room, interview room and common areas.

Features

- > High sensitivity to low sound pressure
- Microphone can pick up normal sounds within a 15' radius
- > May be located up to 1000' from base station
- > Fits into single gang electrical box (not included)
- > Flush or surface mount to wall or ceiling
- > Sensitivity switch: normal/low
- > Tamper resistant stainless steel faceplate with tamperproof screws

Included In




ASK-4®#101D-V p22

Compatible With

- All Louroe base stations and interfaces and most cameras and recorders that accept a line level audio input
- For IP cameras with Mic level input refer to the DV-ML p17





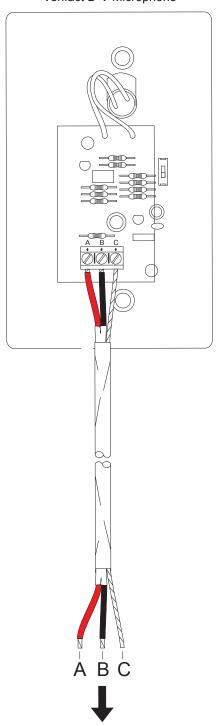

To Louroe Base Stations and Audio Interfaces or Line Level Audio Receivers