

# DH-TP2105

## HDCVI Video Converter




### Features

- Self-adaptive output HDCVI, HDMI, VGA, CVBS signal
- Lossless real time non-compression transmission
- Support 2 dial switches and indicate 4 Baud rate: 2400b/s, 4800b/s, 9600b/s and 115200b/s
- Fully enclosed dustproof design

### Technical Specification

Model	DH-TP2105
<b>Physical Port</b>	
Interface	1*RS485 Input: 1*HDCVI (BNC) Output: 1*HDCVI (BNC), 1*CVBS (BNC), 1*HDMI, 1*VGA
Dial Switch	2 dial switch indicate 4 Baud rates: 2400b/s, 4800b/s, 9600b/s, 115200b/s
<b>Other</b>	
Input Transmission Distance	1080p/720p: 75-5 coaxial support 100m
HDCVI Output Transmission Distance	1080p/720p: 75-5 coaxial support 100m
Indicator	Video , power , data indicator
Power	DC12V 1A
Power Consumption	≤8W
Working Temperature	-10°C ~55°C
Humidity	10%~90%
Weight	200g
Dimension	162mm×136.4mm×30mm
Installation	Wall mount

### Dimensions (mm)

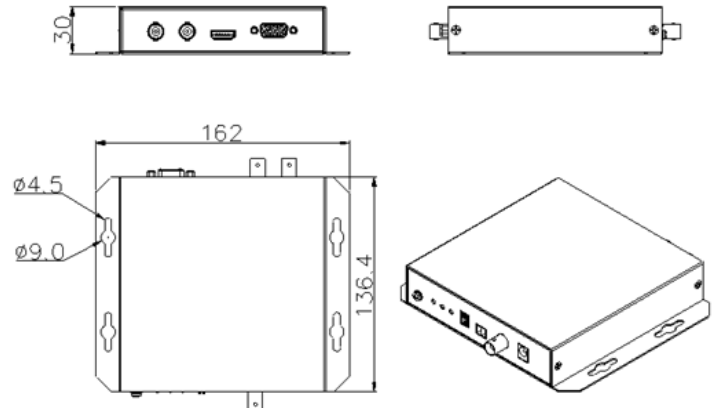

### Application

