



Evolution

360° Indoor Mini Camera

Taking the next step in 360° total situational awareness

A 360° indoor mini IP camera with a 5-megapixel sensor and no moving parts

- Constant 360° surveillance, no blind spots
- Ultra-small light weight enclosure ideal for discreet mounting
- No moving parts means no regular maintenance due to wear and tear; silent operation



Whether wall or ceiling mount is required

- Fully supports IEEE802.3af Power over Ethernet (PoE) with flying lead RJ45 Plug
- Quick and easy installation
- Professional indoor enclosure
- Pleasing aesthetics in white finish
- Minimum illumination 0.2 lux, providing clarity in low light
- Convenient surface-mounting enclosure
- Suitable for ceiling, wall or table mounted applications

Onboard Micro SD card and advanced event management

- Micro SD card slot for future local recording feature and advanced event management
- Configurable privacy regions
- Video Motion Detection within defined areas of interest

Fully integrated with multiple VMS platforms to provide live and retrospective dewarping

- Market leading Oncam 3D dewarping software
- Camera features are accessible via VMS platforms
- Optimises bandwidth and storage utilisation
- Simultaneous multiple video streams; resolutions from 528x480 to 2144x1944
- 15fps @2MP, 1MP and ¼MP, 10fps @4MP
- H.264/MJPEG streaming with multiple quality levels
- Configurable password protection
- Intuitive web-based interface for viewing and configuration
- Integrated with Digital Sentry version 7.5 and other leading VMS platforms



by **Schneider** Electric





TECHNICAL SPECIFICATION

Evolution

360° Indoor Mini Camera

Taking the next step in 360° total situational awareness

Model	EVO-05LID (White enclosure)	EVO-05LJD (Black enclosure)
General		
Field of View	360°	
Image Sensor	5 megapixel; Array Format (Active) 2592H x 1944V = 5,038,848 pixels; 1/2.5-Inch CMOS Sensor	
Angle of View	180° hemisphere	
Lens	185° 1.6mm / F2.0	
Minimum Illumination	0.2 lux = 50 IRE F/2.0 (6500K)	
Frame Rate	15fps typical for 1MP resolution and ¼MP resolution, 15fps typical for 2MP resolution and up to 10fps for 4MP full resolution	
Video Motion Detection	12 regions; configurable response; adjustable characteristics	
Security	Configurable password protection	
Advanced Event Management	Triggered by motion, HTTP event, Result configurable; FTP/SMTP upload, Local recording (with upcoming firmware update)	
Networking	TCP/IP, HTTP, DHCP, DNS, NTP, FTP, SMTP, RSTP, uPNP	
Privacy Regions	10 configurable privacy regions	
Micro SD Card	Built-in Micro SD card slot	
Signal-to-Noise Ratio	45dB	
White Balance Range	Auto White Balance (Range = approx. 2500K-8000K)	
Electrical		
Connection	Flying lead - RJ45 plug	
Network Cable Type	CAT5 or better for 100Base-TX	
Power Input	Power over Ethernet (PoE), IEEE standard 802.3af	
Power Consumption	4.032W	
Video		
Video Stream 1 & 2 Codec's	H.264 High, Level 5 / MJPEG (both streams configurable)	
Video Stream 1 & 2 Compression Level	Multi-levels of compression adjustment	
Video Stream 1 & 2 Pixel Resolution	Fisheyes at: ¼ MegaPixel (528x480), 1MP (1056x960) , 2MP (1488x1360), 4MP (2144x1944)	
Video Stream 3 Codec	MJPEG	
Video Stream 3	Multi-levels of compression and frame rate adjustment (max 15 fps)	
Video Stream 3 Pixel Resolution	Fisheye at: ¼ Megapixel (528x480)	
Image Control	Settings: brightness/contrast/saturation/exposure compensation; wall/ceiling/table mount	
Wide Dynamic Range	Electronic WDR 60dB	
VMS / NVR / HDVR supported	Integrated with Digital Sentry version 7.5 and other leading VMS platforms	
Web Browser Compatibility	Internet Explorer IE9 (with ActiveX plug-in, supplied); Firefox 23 ; Chrome 29; using Quicktime, minimum version 7	
Number of Unicast Users Supported	Up to 20 simultaneous users depending on the resolutions settings	
Bit Rate Control	Selectable options: constant bit rate control; capped bit rate control; constant quality control	
Minimum System Requirements		
Processor and Memory	Computer with 1Ghz 32-bit (x86) or 64-bit (x64) processor and with minimum of 512 MB	
Operating System	Windows Vista 32-bit with service pack 2 (SP2) of higher / 64-bit with service pack (SP2) of higher	
Hard Drive Space	Windows Vista 32-bit = minimum 70MB / Windows Vista 64-bit = minimum 120MB	
Display	Super VGA (800 x 600) of higher-resolution monitor with 256 colours	
Peripherals	100Mbps or greater network connection, mouse or compatible pointing device, keyboard	

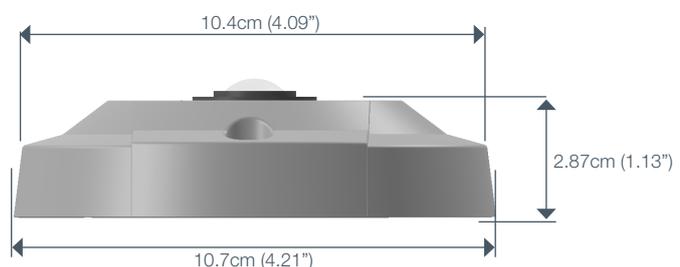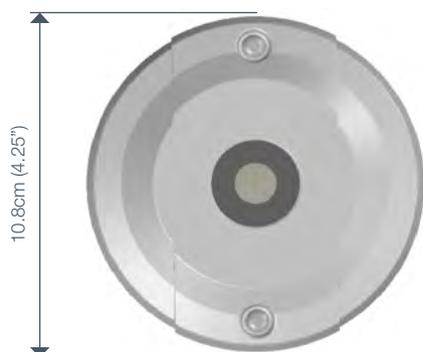

Evolution 360° Indoor Camera

Taking the next step in 360° total situational awareness

Mechanical					
Camera Mount	Indoor Surface mount				
Weight	0.25kg (0.55lbs)				
Enclosure	ABS Thermoplastic				
Environmental					
Operating Temperature Range	0 to +40°C (-32 to +104°F)				
Storage Temperature Range	0 to +40°C (-32 to +104°F)				
Operating Humidity	Up to 98% (In accordance with BS EN 60068-2-30 Test Db variant 1 using test methodology BS EN 50155)				
Ingress Protection Rating	IP40-rated – Indoor use only				
Certifications / Ratings / Patents					
Patents	15 patents; 15 patents pending; 20 licensed patents				
Approvals	IEEE802.3af Class 2; EMC: (CISPR Class A) FCC; CE; ICES-003; Safety: UL60950				
Other Related Products					
Hardware/Software Solutions	Oncam Grandeye SDK integration pack, Evolution 5MP Camera Range, Evolution Accessories, IP Configuration Tool, 360-degree Viewer, OnVu360 Mobile Apps (iOS, Android)				
Frame Rate, Resolution & Storage Needs					
H.264					
4MP *	2144 x 1944	10fps	Constant bit rate settings	5 Mbits/s	24hrs = 54GB **
2MP	1488 x 1360	15fps	Constant bit rate settings	3 Mbits/s	24hrs = 40GB **
1MP	1056 x 960	15fps	Constant bit rate settings	1.5 Mbits/s	24hrs = 16GB **
1/4MP	528 x 480	15fps	Constant bit rate settings	0.8 Mbits/s	24hrs = 8GB **
MJPEG					
4MP	2144 x 1944	10fps	Average file size: 640KB	Average bit rate: 52.4 Mbits/s	24hrs = 552.96GB **
2MP	1488 x 1360	15fps	Average file size: 350KB	Average bit rate: 43.0 Mbits/s	24hrs = 453.60GB **
1MP	1056 x 960	15fps	Average file size: 188KB	Average bit rate: 23.1 Mbits/s	24hrs = 243.65GB **
1/4MP	528 x 480	15fps	Average file size: 62KB	Average bit rate: 7.6 Mbits/s	24hrs = 80.35GB **

* Factory / Default settings

** Based on the same scene, with constant average light conditions

Evolution mini accessory			
Image	Part	Product Code	Description
	IK10+ vandal resistant bubble trim	OBE-11-IWA	The dome bubble trim cover is made of optical grade polycarbonate. This can be fitted instead of the supplied front trim cover.
	Pendant Mount Adapter	OBE-13-IBA	M32 female thread; supplied with M32 to 1½ NPT male thread adaptor. To be fitted on the back of the camera.

Ordering			
E V O - 0 5 L I D			
Series	Camera	Format	Communications
EVO = Evolution Range	05 = 5 Megapixel Sensor	L = Mini (MJPEG/H.264)	D = RJ45 TCP/IP
			Housing I = Indoor (White) J = Indoor (Black)