

WS5080 Endura® Workstation

WITH WS5200 ADVANCED SYSTEM MANAGEMENT SOFTWARE



Product Features

- Provides Full Access to Operations and Administration Through User-Friendly Graphical User Interface
- Microsoft® Windows® 7 Ultimate 64-Bit Operating System
- Highly Intuitive Graphical User Interface Optimized for Surveillance Professionals
- Optional Endura Mapping Interface Provides Editing and Alarm Monitoring/Management Tools
- Support for Standard and Megapixel Resolution Cameras
- Support for MPEG-4, H.264 Baseline, Main, and High-Profile Codecs
- Audio Streaming and Playback
- Zone of Interest™ Allows Independent View and Management of Specified Areas Within a Camera's Field of View in Live or Playback Views
- Synchronized Playback of Multiple Cameras
- Digital Zoom in Live or Playback Views
- Convenient Tear-off Options to Customize Display
- Maintains Camera's Native Aspect Ratio While Supporting 4:3 or 16:9 Aspect Ratio Monitors and a Mix of SD or Megapixel Video Content
- Capable of Up to 16 Simultaneous 4SIF/CIF Resolution, 30/25 Frames per Second (fps) MPEG-4 Decode, 12 H.264 4SIF/CIF Resolution, 30/25 fps H.264 Baseline Decode, or 4 Full 1080p Streams

The **Endura® workstation** is a high-end personal computer running Windows® 7 Ultimate that is optimized for the **WS5200** advanced system management software. The **Endura workstation** can decode and display up to 16 video streams simultaneously and can process up to 30/25 (NTSC/PAL) images at 4CIF resolution per second, per stream. The **Endura workstation** includes the **WS5200** software package.

The **WS5200** software provides access to all operation and configuration features of the Endura system in a unified, intuitive, graphical user interface. The interface has been optimized for the demanding needs of surveillance professionals and utilizes drag-and-drop operations, shortcut menus, built-in tooltips, and online Help to enable the most direct, intuitive interactions with cameras and components distributed across the network.



- EnduraView™ Technology Mitigates CPU Processing Requirements and Network Bandwidth Consumption for Multiscreen Configurations
- Integrated Configuration and Administration Interface Provides Full Management Capability for all Components
- Powerful Scripting Engine to Automate Virtual Matrix Functionality Across a Built-in Monitor Wall Capability
- On-Screen Pan/Tilt/Zoom (PTZ) Controls Including Click to Center and PTZ to Selected Area
- Camera Call Up and PTZ Control from KBD5000
- Advanced Search Capabilities Including Motion, Alarm, Event, and Camera
- Integrated Event and Alarm Monitoring and Management Interface
- User-Specific Choice of Language, Rights and Permissions, and Screen Configurations
- Export Video and Still Images in Multiple Formats Including PEF, QuickTime®, MPEG-4, AVI, PNG, BMP, and JPG

Video Display Optimized for Surveillance

Surveillance operators require access to real-time live video and instant access to playback. The **WS5200** has been specifically designed to optimize performance, productivity, and effectiveness. Operators can customize up to six active workspaces. Each workspace can have its own screen configuration populated with any grouping of cameras. These workspaces allow the operator to rapidly switch from camera group to camera group. The workspaces and camera associations are automatically loaded upon logon, along with the user's language preferences and permission levels. This eliminates any lost time in changing screen layouts or configurations during shift changes.



by Schneider Electric

International Standards
Organization Registered Firm;
ISO 9001 Quality System



C4011 / REVISED 7-21-16

TECHNICAL SPECIFICATIONS

The second generation of the **WS5200** has also been designed to deliver optimum decoding performance to take advantage of the latest capabilities of analog cameras and advances in compression technology. The **WS5200** supports MPEG-4 as well as all common profiles of the latest H.264 codec. Provided the host PC has enough processing power, users can simultaneously decode sixteen 4CIF, MPEG-4 video streams in real time, or twelve H.264 Baseline profile streams in real time, or four 1080p streams in real time. Of course, any combination is also supported. Additionally, more cameras can be viewed simultaneously using the **WS5200's** convenient tear-off tabs and leveraging multiple monitors to display more content. Endura's patent-pending EnduraView™ technology will manage the CPU processing load and network bandwidth requirements by automatically seeking out and displaying a lower resolution, secondary stream (if one exists), or reducing the refresh rate to ensure that system stabilization is not jeopardized.

To take advantage of the latest developments in monitor technology and camera capabilities, the **WS5200** interface automatically detects the monitor's native resolution and aspect ratio and configures the display to accommodate what the monitor can support. Based on the monitor's native aspect ratio, the **WS5200** supports screen configurations in single-image, 2 x 2, 3 x 3, 4 x 4, 1 + 5, 1 + 12, and 2 + 8 for 4:3 aspect ratio displays and adds 3 x 2 and 4 x 3 for 16:9 aspect ratio displays. As different cameras operate in different aspect ratios, the **WS5200** will maintain the native aspect ratio of the camera to minimize any potential distortion of the image. An innovative Zone of Interest™ feature makes it convenient to leverage the power of today's megapixel cameras to cover a large field of view while allowing a user to independently select certain areas of the scene to get a closer view. The **WS5200's** zone of interest capability consumes no additional processing power or network bandwidth as a user creates up to six independently controlled zones of interest from a single camera.

Recorded footage can be instantly accessed for any camera without impacting the ability to maintain live surveillance over other cameras on the same monitor. Flexible synchronous playback allows operators to synchronize the playback of 16 cameras for investigations that require multiple vantage points of the same event. Additionally, the **WS5200** allows users to review recorded footage from any camera while simultaneously viewing the live stream from that camera on the same monitor. Camera controls, PTZ operation, video playback controls, snapshot capture, and export tools all conveniently appear over the video when the cursor is placed on the desired camera's view.

Fully Integrated Administration and Management

In addition to access to live and recorded video, the **WS5200** also serves as an administration and management console for the Endura system. With proper user credentials, administrative users can easily configure all devices and users on the system. Camera, encoder, recorder, and decoder hardware and software parameters can be accessed and managed from the administrative screens. Software patches and updates can easily be pushed out to select or multiple devices from the same console. User passwords, preferences, and credentials can be centrally managed from one **WS5200**.

All diagnostic messages from every component on the Endura network are available to any user and any viewing device. With proper credentials, administrators can easily configure all users and devices on the system. User actions and system messages are continuously logged and available for audit trail purposes.

Integrated Alarm Management Engine


The **WS5200** has a built-in alarm management engine. System alarms, motion, and video analytics alarms are displayed in a dedicated alarm workspace. As the alarm is generated, indicators display the type of alarm, the priority level of the alarm, and the current state of the alarm. Users can simply select the alarm and visually verify its cause before determining whether to acknowledge or snooze the alarm. Comments and instructions inserted by an administrator serve to provide more detail about the alarm or to instruct the operator about the next actions taken. Operators can also add their own comments to be logged with the associated alarm.

Extensible Architecture

The **WS5200** provides built-in support for monitor wall configuration and operation. Using NET5402R-HD network video decoders or VCD5202 virtual consoles, operators can maneuver and control video on any network monitor through the **WS5200** interface or the VCD5202 interface.

The **WS5200** offers an optional interface to Endura Mapping. The mapping extension adds editing and map construction tools while providing for a convenient way to monitor the entire facility for alarms. Multiple layers can be turned on and off to provide access to key devices. In addition, multiple maps can be hyperlinked together to provide for easy navigation between map views.

As a fully integrated component of the **WS5200**, the mapping interface provides a convenient visual verification from a pop-up view. In addition to access to recorded and live video from the pop-up, operators can acknowledge or snooze the alarm, manually execute relays and scripts as a response to the alarm, capture a snapshot, or direct the associated camera onto the Endura monitor wall for further analysis and action.

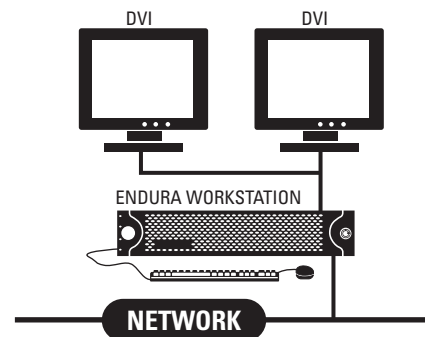

IMPORTANT NOTE: PLEASE READ. The network implementation is shown as a general representation only and is not intended to show a detailed network topology. Your actual network will differ, requiring changes or perhaps additional network equipment to accommodate the system as illustrated. Please contact your local Pelco representative to discuss your specific requirements.

TECHNICAL SPECIFICATIONS

WORKSTATION HARDWARE SPECIFICATIONS

Processor	Intel® Xeon® E3-1275 v3
Internal Memory	8 GB DDR3 RAM ECC
Operating System	Windows 7 Ultimate 64-bit SP1
User Interface	Graphical User Interface, WS5200 version 2.x, advanced system management software
Internal Storage	
SSD	120 GB
Drive Bays	4 (3 unused)
Optical Drive	DVD±RW
USB Ports	3 USB 2.0 ports (1 front, 2 rear) 2 USB 3.0 ports (rear)

VIDEO

Video System	Intel HD Graphics P4700 (shared memory)
Max Resolution	3840 x 2160 per DisplayPort output (2x) 1920 x 1200 at 60 hz on DVI-D output 1920 x 1200 at 60 hz on VGA output
Video Outputs	Supports up to 3 simultaneous displays using any combination of the four outputs
Video Standards	60 Hz capable for NTSC 75 Hz capable for PAL
Video Decoding Supported	MPEG-4 ASP; H.264 Baseline, Main, and High profiles
Video Display Modes	1 image, 4 images (2 x 2), 9 images (3 x 3), 16 images (4 x 4), 6 images (1 large + 5 small), 10 images (2 large + 8 small), 13 images (1 large + 12 small); High definition monitors can also display 6 images (3 x 2) and 12 images (4 x 3)
Decoding Performance	16X real-time MPEG-4 streams at 704 x 480; 12X real-time H.264 Baseline profile streams at 704 x 480; 4X H.264 Baseline profile streams at 720p; 4X real-time H.264 Baseline profile streams at 1080p 1x EVO-05 Series streams

AUDIO

Audio Decoding	G.711 speech codec
Audio Bit-rate	64 kbps
Audio Levels	
Input	Electret microphone
Output	Up to 3 Vp-p, adjustable, minimum load of 8 ohms
Audio Connectors	2, 3.5 mm stereo jacks
Connector Tip	Signal left (input and output)
Connector Ring	Signal right (input and output)
Connector Sleeve	Common
Audio Inputs	Microphone
Audio Outputs	Speaker or line out

NETWORK

Interface	2 Gigabit Ethernet RJ-45 port (1000Base-T)
-----------	--

FRONT PANEL

Buttons	Power, configuration/reset
Indicators	
Unit Status	Green, amber, red
Primary Network	Green, amber, red
Secondary Network	Green, amber, red
Software Status	Green, amber, red (based on diagnostics)
Hard Disk Status	Green, red, off (behind bezel)

POWER

Power Input	100 to 240 VAC, 50/60 Hz, autoranging
Power Supply	Internal
Power Consumption	Operating Maximum
100 VAC	160 W, 1.60 A, 547 BTU/H
115 VAC	160 W, 1.39 A, 547 BTU/H
220 VAC	160 W, 0.72 A, 547 BTU/H

ENVIRONMENTAL

Operating Temperature	10° to 35°C (50° to 95°F) at unit air intake (front of unit)
Storage Temperature	-40° to 65°C (-40° to 149°F)
Operating Humidity	20% to 80%, noncondensing
Maximum Humidity Gradient	10% per hour
Operating Altitude	-15 to 3,048 m (-50 to 10,000 ft)
Operating Vibration	0.25 G at 3 Hz to 200 Hz at a sweep rate of 0.5 octave/minute

Note: The temperature at the unit air intake can be significantly higher than room temperature. Temperature is affected by rack configuration, floor layout, air conditioning strategy, and other issues. To prevent performance failure and unit damage, make sure the temperature at the unit is continuously within the operating temperature range.

PHYSICAL

Construction	Steel cabinet
Finish	
Front panel	Gray metallic with black end caps
Chassis	Black matte finish
Dimensions	50.8 x 43.4 x 8.9 cm (20" D x 17.1" W x 3.5" H)
Mounting	Desktop (feet) or rack (2 RU per unit)
Unit Weight	13.06 kg (28.8 lb)

TECHNICAL SPECIFICATIONS

MODELS

Use the following table to create a model number for your WS5080. For example, the model number for a unit with a United Kingdom power cord would be WS5080-EUK.

Model	Country Code	Description
WS5080	US = North America EUK = Europe/United Kingdom	Endura Workstation with WS5200 version 2.x advanced system management software package (WS5200-1) and regional power cord

SUPPLIED ACCESSORIES

Keyboard

Mouse

DisplayPort to DVI Adapter

USB drive containing resource and recovery information

Windows 7 Ultimate Disc with License

Rack Mount Kit

Power Cord

Note: Units shipped to China do not include power cords.

OPTIONAL POWER ACCESSORIES

PWRCRD-S-AR	Standard power cord, Argentina
PWRCRD-S-AU	Standard power cord, Australia
PWRCRD-S-EU	Standard power cord, Europe
PWRCRD-S-UK	Standard power cord, United Kingdom
PWRCRD-S-US	Standard power cord, United States

OPTIONAL SOFTWARE ACCESSORIES

WS5200-MAP

Endura Mapping interface

CERTIFICATIONS

- CE, Class A
- FCC, Class A
- UL/cUL Listed
- S-Mark for Argentina
- CCC*
- C-Tick

* At the time of this publication, these certifications are pending. Consult the factory, our Web site (www.pelco.com), or the most recent B.O.S.S.® update for the current status of certifications.

STANDARDS/ORGANIZATIONS

- Pelco is a member of the MPEG-4 Industry Forum
- Pelco is a member of the Universal Plug and Play (UPnP) Forum, Steering Committee
- Pelco is a member of the Universal Serial Bus (USB) Implementers Forum
- Pelco is a contributor to the International Standards for Organization / Electrotechnical Commission (ISO/IEC) Joint Technical Committee 1 (JTC1), "Information Technology," Subcommittee 29, Working Group 11
- Compliance, ISO/IEC 14496 standard (also known as MPEG-4)
- Compliance, International Telecommunication Union (ITU) Recommendation G.711, "Pulse Code Modulation (PCM) of Voice Frequencies"

Pelco by Schneider Electric

3500 Pelco Way, Clovis, California 93612-5699 United States

USA & Canada Tel (800) 289-9100 Fax (800) 289-9150

International Tel +1 (559) 292-1981 Fax +1 (559) 348-1120

www.pelco.com www.pelco.com/community

Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. ONVIF and the ONVIF logo are trademarks of ONVIF Inc. All other product names and services are the property of their respective companies.

Product specifications and availability are subject to change without notice.

©Copyright 2015, Pelco, Inc. All rights reserved.