



IPC6222ER-X30(P) 2MP 30x IR Network PTZ Dome Camera



Features:

1/2.8" progressive scan CMOS
Up to 1920 x 1080 resolution, 30fps
30x optical zoom (4.5~135mm)
AC 24V, 9~42W(heater: Max. 24W)
IP66, -40°C ~ +70°C
(-P) PoE




IPC6222ER-X30(P)

2MP 30x IR Network PTZ Dome Camera

Camera	IPC6222ER-X30	IPC6222ER-X30P
Sensor	1/2.8", 2 megapixel, progressive scan, CMOS	
Lens	4.5 ~ 135mm (30x optical zoom)	
Angle of View (H)	62.9° (wide) ~ 2.3° (tele)	
Iris	Auto/Manual; F1.6 ~ F4.8	
Shutter	Auto/Manual; shutter time: 1/6s ~ 1/8000s	
Minimum Illumination	Color: 0.03lux (F1.6, 50IRE), black/white: 0.01lux (F1.6, 50IRE)	
S/N	>52dB	
Day/Night	IR-cut filter with auto switch (ICR)	
Video		
Max. Resolution	1920×1080	
Video Compression	H.264, MJPEG	
Frame Rate	1080P (1920×1080) 30fps; 720P (1280×720) 30fps; D1 (720×576) 25fps	
Video Streaming	Triple	
Digital Zoom	Supported	
Audio		
Audio Compression	G.711	
Two-way Audio	Supported	
Storage		
Edge Storage	Micro SD, up to 128 GB	
Network		
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, Qos, NTP, FTP, HTTP, SNMP, SIP	
Compatible Integration	ONVIF, IMOS, API	
Pan & Tilt		
Pan	Pan range: 360° (endless), pan speed: 0.1°/s ~ 240°/s, preset speed: 300°/s	
Tilt	Tilt range: -15° ~ +90° (auto reverse), tilt speed: 0.1° ~ 160°/s, preset speed: 240°/s	
Number of Preset	255	
Patrol	Up to 16 patrols, up to 32 presets per patrol Note: the total number of patrols and patterns is 16.	
Pattern	Up to 16 patterns, with the total recording time not less 15 minutes per pattern	
Interface		
Audio I/O	Audio cable	
	Input: impedance 35kΩ; amplitude 2V [p-p]	
	Output: impedance 600Ω; amplitude 2V [p-p]	
Alarm I/O	1/ 1	
Network	1 RJ45 10M/100M Base-TX Ethernet	
General		
Power	24V AC, 24V DC	24V AC, 24V DC, PoE
	Power consumption: 9~42W(IR: 16W, heater: max. 24W)	
Dimensions (Ø x H)	Ø227 x 359.4mm (Ø8.9" x 14.2")	
Weight	5.28kg (11.6lb)	
Working Environment	-40°C ~ +65°C (-40°F ~ 149°F), humidity ≤ 90% RH(non-condensing)	
Ingress Protection	IP66	

*Product specifications and availability are subject to change without notice.

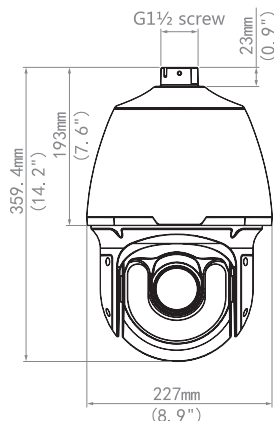

Zhejiang Uniview Technologies Co., Ltd.
Address: Building No.10, Wanlun Science Park, Jiangling Road 88, Hangzhou, P. R. China, 310051
Website: www.uniview.com Email: overseasbusiness@uniview.com

©2016 Zhejiang Uniview Technologies Co., Ltd. all rights reserved.
2016.01-OM-160137-OWN V1.0

