
TrilogyProx: PDL3000

Use the same ID cards as hardwired access systems & install in about an hour

Save all the downtime and 1/2 the cost of hardwired systems

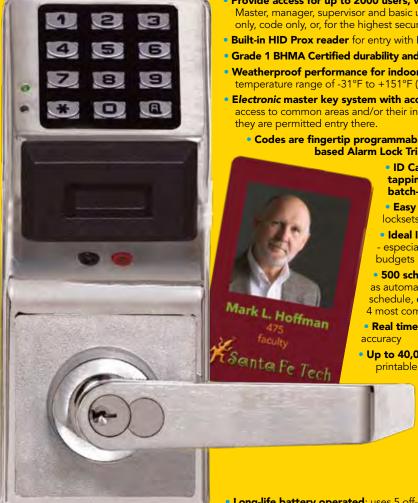

- Provide access for up to 2000 users, with prox ID-cards or 3 to 6 digit codes including: Master, manager, supervisor and basic user. Users are individually programmed to use a card only, code only, or, for the highest security, both card and code.
- Built-in HID Prox reader for entry with HID prox ID cards and keyfob credentials
- Grade 1 BHMA Certified durability and rugged clutch mechanism ensure long dependable life
- Weatherproof performance for indoor and outdoor applications, wide operating temperature range of -31°F to +151°F (-35°C to +66°C)
- Electronic master key system with access customized to each user's hours Give each user access to common areas and/or their individual area(s) and do so defined by the actual times
 - Codes are fingertip programmable -or- downloadable via PC (with Free Windowsbased Alarm Lock Trilogy Software) or using optional Data Transfer Module
 - ID Cards can be simply added locally by individually tapping them on the lock face -or- added in multiples in batch-enrollment with PC or optional Enroller Module
 - Easy to install in about an hour retrofits most cylindrical locksets and cleanly retrofits mechanical digital locks' prep.
 - Ideal ID-card access system solution, one door at a time - especially when hardwire access system capacity, timelines or budgets run out.
 - 500 scheduled events save manpower. Program events such as automatic locking or unlocking by daily, weekly or holiday schedule, etc. Includes 4 quick schedules for one-step set up of the 4 most common time schedules
 - Real time clock allows logging of events to within 1 second
 - Up to 40,000 event audit trail with time/date stamp for a printable record of door access activity by user
 - Adjustable entry time allowance from 3-15 seconds
 - Greater security with "temporary keypad lockout" after 6 unsuccessful code-entry attempts (adjustable from 1-9 attempts) - Attempts are also logged by time and date
 - Programmable relays energize when one or more selected events occur, e.g., in concert with a receptionist buzz-in application or with video cameras
- Long-life battery operated; uses 5 off-the-shelf AA batteries; 60,000 cycles, typical. Audible and visual low-battery alert.
- Standard key override or interchangeable core models accepting 6 or 7 pin cores from Arrow, Best, Falcon or KSP. Other IC core preps available
- Available in standard Trilogy leverset (straight) or with regal (curved) lever
- Seven finishes; polished brass (US3), satin brass (US4), antique brass (US5), polished chrome (US26), satin chrome (US26D), satin bronze (US10) and duronodic (US 10B).

New! PDL3000K


Additionally logs mechanical key override use in audit trail. Available in standard key override or interchangeable core prep.












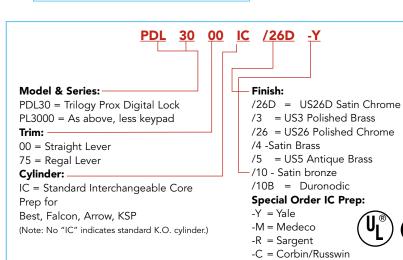

-S = Schlage (in regal lever)

POWER: 5AA alkaline batteries, supplied. Audible low battery alert, visual and audible entry indicators, 60,000 cycles typical.

PROGRAMMING: Locking modes, event schedules,

group, individual, master, management, passage, emergency service codes. Lockout, remote override capability and allowable entry time (3, 10 or 15 seconds), are programmable through the keypad, AL-DTMIII or Alarm Lock's DL-Windows PC Software.

PDL3000K: Model logs mechanical key override use and has a standard interchangeable core



Regal handle option

Lever sets feature clutch mechanism ensuring longer life and complies with ADA specs providing barrier-free access to the disabled.

Trilogy audit trail lock accessories

AL-PCI2 Trilogy PC Software

AL-DTMIII Data Transfer Module used to transfer program data from the PC (running DL-WINDOWS software) to the lock and receives audit trail from the lock. Can store data for up to 96 locks at a time.

Kit Windows-format software kit used to program Trilogy lock, codes, schedules, view audit trail reports. Kit includes DL-WINDOWS software and (required) computer interface cable for use on serial

port. Note: Requires DL-WINDOWS Software version 3.02 or higher. AL-PCI2-U, As above, but with interface cable for

USB port.

DL-WINDOWS Upgrade for Trilogy software version (software only). (Contained in two items above.)

> AL-PRE: Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox cards, keyfobs, tags into DL-Windows (Simply present the prox Card/fob device to the unit's faceplate to enroll—no need to be in the presence of the lock while enrolling eliminates the need for keyboarding each

badge's number). Supports all Prox cards, keyfobs and tags. Simultaneous card enrollment, downloading or uploading – all on just one serial port. 9V Battery operation.

AL-IR1 Infrared Printer Prints the event log and user code with wireless hand-held convenience (battery operated).



ALARM LOCK

345 Bayview Ave, Amityville, New York 11701 1-800-ALA-LOCK • Fax 631-789-3383 www.alarmlock.com

Trilogy is a trademark of Alarm Lock. © NAPCO 12/2008 Patents and Patents Pending ALA156A

