# AVer/Hedic

### **EB1104 NET**

- 4 channels video & 1 channel audio network stand alone DVR
- Easy access to recording data, anywhere, anytime, via Internet Explorer
- Support USB backup and playback
- Support up to 2 hard drives(up to 500GB)
- Operating 2 HDD as one logical storage device
- Remotely control the server via the Internet
- Dual CCTV/LCD monitor outputs
- Exclusive playback application on Windows 2000/XP
- Remote display, record, playback & backup
- Remote snapshot & print
- Remote controller/Mounting bracket/Drawer (optional)



# AVerMedia EB1104 NET

## REAL TIME NETWORK DVR

## Product Features

- 4 channel standalone security digital video recorder
- Dual CCTV/LCD monitor outputs Exclusive!
- Multiple DVR management via Internet Explorer Exclusive!
- 1 channel audio input/output
- Video compression: MJPEG
- Motion detection recording
- Supports video format: NTSC & PAL
- Supports 2 hard drives (not included)
- Supports USB 2.0 for PC/NB backup
- Support playback from two HDD via USB
- Remote access management through Internet Explorer
- I/O control for sensor and relay
- Remote controller (optional)



# **Applications**

- Convenience store, supermarket, department store
- Factory, warehouse, gas station, parking lot
- School, educational institutions
- Museum, hospital, rail station
- Community center, residential area



# **Product Performance**

Product	EB1104 NET
Video input	4
VGA output	1
Audio input/output	1
Display Rate (NTSC / PAL)	120 / 100 fps*
Recording Rate (NTSC / PAL)	120 / 100 fps*

<sup>\*</sup>Quad mode

<sup>\*</sup> Specifications are subject to change without notice




# Product Specifications

- 4 composite video inputs (BNC connector)
- 1 composite & 1 VGA output
- Video compression: MJPEG
- Video Format: NTSC and PAL
- 1 Audio Input/Output
- Resolution: 720 x 480( NTSC ),720 x 576 (PAL)
- Display frame rate (Quad mode): 30/25 fps (NTSC/PAL) per channel, total 120/100 fps (NTSC/PAL)
- Recording frame rate (Quad mode):
  30/25 fps (NTSC/PAL) per channel, total
  120/100 fps (NTSC/PAL)
- Recording modes:
  Schedule (00:00~24:00 set by hour) Motion detection/Sensor/Continuous
- Auto recycle when disk is full
- Playback
  - Real time playback: immediate access

#### playback

- Video search by date/time/event
- Easy to playback and backup on Windows 2000/XP via exclusive playback application
- Support playback from two HDD via USB
- I/C
  - 4 sensor input and 1 relay output control
  - Relay output controls alarm, lock, light, or other devices.
- 1 USB 2.0 port
- Remote access management
  - Remote display, record, playback & backup through IE.
  - Easy to remote control server via Internet
  - Easy to use remote application via IE
  - Easy to manage multiple DVR via IE
  - Remote snapshot & print.

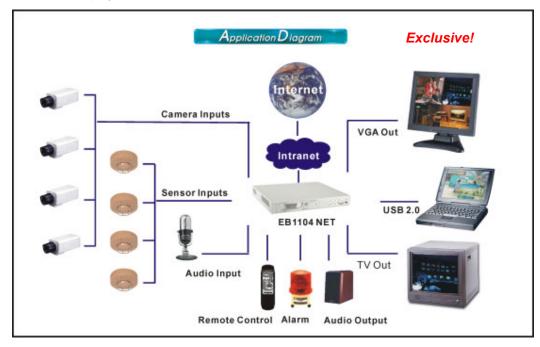

## **AVerMedia TECHNOLOGIES, Inc.**

Office: 423, Dixon Landing Road, Milpitas, CA 95035

Tel: 408-263-3828 Fax: 408-263-8132

URL: http://www.avermedia-usa.com / www.aver.com

