



CVC5845DNV	2.8 - 12mm auto iris varifocal lens, black housing
CVC5845DNVW	2.8 - 12mm auto iris varifocal lens, white housing
CVC5945DNV	5 - 50mm auto iris varifocal lens, black housing
CVC5945DNVW	5 - 50mm auto iris varifocal lens, white housing

Features

- 1/3" Sony Super-HAD II™ CCD
- 3D-DNR (sense-up) - sharp image under ultra low light level
- Intense-IR function - no saturation image, vivid image
- Defect Function - elimination of white spots
- HSBLC (High Light Suppression BLC)
- Privacy zone
- Third-generation DSP chip
- ICR - Removable IR cut filter
- Convenient On-Screen Display (OSD) function controls
- 32x digital zoom
- Dual voltage (12VDC / 24VAC)
- 5 year warranty


Specifications

Image Sensor	1/3" Sony Super-HAD II™ CCD
Resolution.....	600 TV lines
Minimum Illumination.....	0.000006 lux (IR LEDs on)
Effective Pixels	768 (H) x 494 (V)
Total Pixels	811 (H) x 508 (V)
Number of IR LEDs	42
IR Range	Up To 90'
White Balance	ATW / AWB / Manual / AWC - Set
Gain Control	High / Middle / Low / Off
S/N (Y-signal)	52dB (AGC off, Weight on)
Backlight Compensation.....	BLC / HSBLC / Off
Electronic Shutter Speed.....	Auto: (1/50, 1/60 sec. - 1/100,000 sec.)
OSD	Built-In
3 DNR.....	On / Off (0-100 level adjustable)
D-WDR	Indoor / Outdoor / Off
Sharpness	0-31' (level adjustable)
Privacy	On / Off (8 zones)
Scanning System.....	2:1 interlace
Synchronization	Internal / Line-Lock
Motion Detection.....	On / Off (4 zones)
Sense-Up.....	Off / Auto (selectable limit x2 - x256)



Mirror	Off / Mirror / V-Flip / Rotate
Freeze	On / Off
Day & Night	Color / BW / Auto / EXT
Digital Zoom	On (x32) / Off
Blemish Compensation.....	Auto: 128 point / Manual: 4 point
Power Consumption	12VDC, 250mA (CDS off) 12VDC, 700mA (CDS on) 24VAC, 100mA (CDS off) 24VAC, 250mA (CDS on)
Power Supply	12VDC / 24VAC (dual voltage) (power supply not included)
Operating Temperature/	
Humidity.....	14° F - 122° F / RH 95% max.
Storage Temperature/	
Humidity.....	- 4° F - 140° F / RH 95% max.
Dimensions.....	4.3" (H) x 5" (Dia.)
Weight	3 lbs.

Optional Accessories

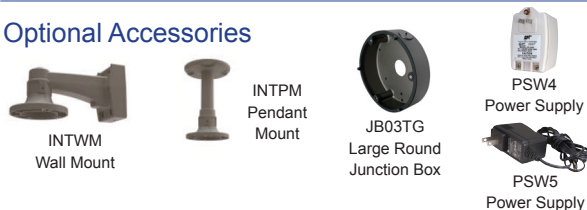

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 1/25/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com