

New IP Cameras In Stock

FREE 32CH VMS SOFTWARE WITH EVERY GV IP CAM

Vandal Dome V3

Vandal Dome V3 IP Camera

Select models available with:

- 3X ZOOM MOTORIZED LENS
- SUPER LOW LUX
- WDR PRO



- Megapixel lens progressive scan CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps
- Vandal resistance (IK10+)
- Ingress protection (IP67)
- 3-axis mechanism (pan / tilt / roll)
- Day/night function with removable IR-cut filter
- High power IR LEDs
- Intelligent IR
- IR distance up to 30 m (98.4 ft.)
- External microphone
- Two-way audio
- One sensor input and alarm output
- TV-out support
- Built-in micro SD card slot (SD/SDHC)
- DC12V / AC24V / PoE
- Wide Dynamic Range (WDR)
- 3D DNR (Digital Noise Reduction)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

Models Available

SKU #	Ordering Part No.	Description
Vandal Proof Dome V3 with high power IR LED		
84-VD15300-001U	120-VD1530-A00	GV-VD1530 1.3MP 3~9 mm Super Low Lux IR Vandal Proof Dome, High power IR LEDs, IR distance up to 30m (98.4ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
84-VD24300-001U	120-VD2430-W00	GV-VD2430 2MP 3~9 mm IR Vandal Proof Dome, WDR Pro , High power IR LEDs, IR distance up to 20m (65.6ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
84-VD25300-001U	120-VD2530-A00	GV-VD2530 2MP 3~9 mm Super Low Lux IR Vandal Proof Dome, High power IR LEDs, IR distance up to 25m (82ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
Motorized Vandal Proof Dome V3 +with high power IR LED		
84-VD24400-001U	120-VD2440-MW0	GV-VD2440 2MP 3~9 mm IR Vandal Proof Dome, 3x zoom , WDR Pro , High power IR LEDs, IR distance up to 20m (65.6ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
84-VD25400-001U	120-VD2540-AM0	GV-VD2540 2MP 3~9 mm Super Low Lux IR Vandal Proof Dome, 3x zoom , High power IR LEDs, IR distance up to 25m (82ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
84-VD34400-001U	120-VD3440-MW0	GV-VD3440 3MP 3~9 mm IR Vandal Proof Dome, 3x zoom , WDR Pro , High power IR LEDs, IR distance up to 20m (65.6ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
84-VD53400-001U	120-VD5340-M00	GV-VD5340 5MP 3.3~9 mm IR Vandal Proof Dome, 3x zoom , High power IR LEDs, IR distance up to 20m (65.6ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE

Super Low Lux Aurora Series

Aurora Bullet IP Camera, 1.3 and 2MP

1.3 AND 2 MP MODELS AVAILABLE



- Progressive scan super low lux CMOS
- Minimum illumination at 0.02 lux
- Dual streams from H.264 and MJPEG
- Up to 30 fps
- Intelligent IR
- Vandal resistance (**IK10** for metal casing)
- Ingress protection (**IP67**)
- Cable-concealed bracket
- One alarm input and sensor output
- Built-in micro SD card slot (SD/SDHC)
- 2-way audio
- Wide Dynamic Range (WDR)
- 3D DNR (Digital Noise Reduction)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- DC 12V / AC 24V / PoE
- Removable IR-cut filter for Day/Night
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF conformant

Models Available

SKU #	Ordering Part No.	Description
84-BL15000-001U	120-BL1500-A00	GV-BL1500 1.3MP Super Low Lux Bullet cam, 3~9mm, 3D DNR (Digital Noise Reduction), D/N, IP67, IR, DC12V/AC24V/PoE
84-BL25000-001U	120-BL2500-A00	GV-BL2500 2MP Super Low Lux IR Bullet cam, 3~9mm, 3D DNR (Digital Noise Reduction), D/N, IP67, DC12V/AC24V/PoE

Aurora Mini Fixed Dome, 1.3 and 2MP

1.3 AND 2 MP MODELS AVAILABLE



- Megapixel Progressive Scan super low lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps
- Day and night function (electronic)
- USB slot for GV-WiFi Adapter or USB hard drive
- Built-in micro SD card slot (SD/SDHC)
- Active Tampering alarm
- Wide Dynamic Range (WDR)
- 3D DNR (Digital Noise Reduction)
- Two-way audio
- Defog
- Motion detection
- Privacy mask
- IP address filtering
- DC 5V / PoE
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF conformant

Models Available

SKU #	Ordering Part No.	Description
84-MFD1501-1F1U	110-MFD1501-1F4	GV-MFD1501-1F 1.3M Super low lux, 4mm Mini Fixed Dome, DC 5V/PoE
84-MFD1501-4F1U	110-MFD1501-4F2	GV-MFD1501-4F 1.3M Super low lux, 2.1mm Mini Fixed Dome, DC 5V/PoE
84-MFD2501-1F1U	110-MFD2501-1F4	GV-MFD2501-1F 2M Super low lux, 4mm Mini Fixed Dome, DC 5V/PoE
84-MFD2501-4F1U	110-MFD2501-4F2	GV-MFD2501-4F 2M Super low lux, 2.1mm Mini Fixed Dome, DC 5V/PoE

Aurora Fixed Dome, 1.3 and 2MP

1.3 AND 2 MP MODELS AVAILABLE



- Progressive scan Super Low Lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps
- 3-axis mechanism (pan / tilt / roll)
- Varifocal megapixel lens
- Intelligent IR
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Built-in micro SD card slot (SD/SDHC)
- DC 12V / AC 24V / PoE
- Wide Dynamic Range (WDR)
- 3D DNR (Digital Noise Reduction)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- Removable IR-cut filter for Day/Night function
- IP address filtering
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface


Models Available

SKU #	Ordering Part No.	Description
84-FD15000-001U	110-FD1500-A00	GV-FD1500 1.3MP 3~9mm Super Low Lux IR Fixed Dome, 3D DNR, DC12V/AC24V/PoE
84-FD25000-001U	110-FD2500-A00	GV-FD2500 2MP 3~9mm Super Low Lux, IR Fixed Dome, DC12V/AC24V/PoE

Aurora Vandal Dome V3, 1.3 and 2MP

Select models available with:

3X ZOOM MOTORIZED LENS

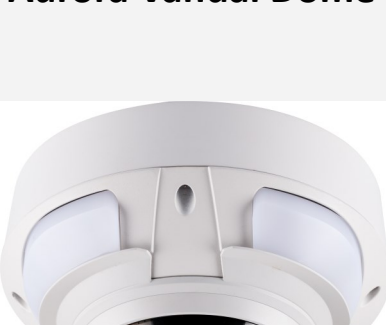

- Progressive scan Super Low Lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps
- Vandal resistance (IK10+)
- Ingress protection (IP67)
- 3-axis mechanism (pan / tilt / roll)
- Day/night function with removable IR-cut filter
- High power IR LEDs
- Intelligent IR
- IR distance up to 30 m (98.4 ft.)
- External microphone
- Two-way audio
- One sensor input and alarm output
- TV-out support
- Built-in micro SD card slot (SD/SDHC)
- DC12V / AC24V / PoE
- Wide Dynamic Range (WDR)
- 3D DNR (Digital Noise Reduction)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

Models Available

SKU #	Ordering Part No.	Description
Vandal Proof Dome V3 with high power IR LED		
84-VD15000-001U	120-VD1500-A00	GV-VD1500 1.3MP 3~9 mm Super Low Lux IR Vandal Proof Dome, 3D DNR, D/N, IP67 with 3.0mm transparent cover, IK10+, DC12V/AC24V/PoE
84-VD15300-001U	120-VD1530-A00	GV-VD1530 1.3MP 3~9 mm Super Low Lux IR Vandal Proof Dome, High power IR LEDs, IR distance up to 30m (98.4ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
84-VD25300-001U	120-VD2530-A00	GV-VD2530 2MP 3~9 mm Super Low Lux IR Vandal Proof Dome, High power IR LEDs, IR distance up to 25m (82ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE
Motorized Vandal Proof Dome V3 +with high power IR LED		
84-VD25400-001U	120-VD2540-AM0	GV-VD2540 2MP 3~9 mm Super Low Lux IR Vandal Proof Dome, 3x zoom , High power IR LEDs, IR distance up to 25m (82ft), D/N, IP67, IK10+, no cable, DC12V/AC24V/PoE

Target Series

Target Box IP Camera




- 1/3" progressive scan low lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps at 1280 x 1024
- Intelligent IR
- Day/night function with removable IR filter
- Built-in microphone
- Wide Dynamic Range (WDR)
- Defog
- Motion detection
- Tampering alarm
- Text overlay
- Privacy mask
- IP address filtering
- DC 12V / PoE
- Supports iPhone, iPad, Android & 3GPP
- ONVIF (Profile S) conformant

Models Available

SKU #	Ordering Part No.	Description
84-EBX1100-0010	110-EBX1100-0F2	GV-EBX1100-0F 1.3MP 2.8mm Low Lux Target series Box Cam, DC 12V/PoE
84-EBX1100-1010	110-EBX1100-1F3	GV-EBX1100-1F 1.3MP 3.6mm Low Lux Target series Box Cam, DC 12V/PoE

Target Fixed Dome IP Camera

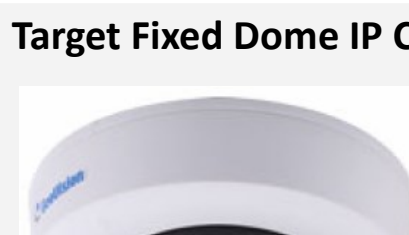


- 1/3" progressive scan low lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps at 1280 x 1024
- Intelligent IR
- Day/night function with removable IR filter
- 2-axis mechanism (pan / tilt)
- Built-in microphone
- Wide Dynamic Range (WDR)
- Defog
- Motion detection
- Tampering alarm
- Text overlay
- Privacy mask
- IP address filtering
- DC 12V / PoE
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

Models Available

SKU #	Ordering Part No.	Description
84-EFD1100-0010	110-EFD1100-0F2	GV-EFD1100-0F 1.3MP 2.8mm Low Lux Target series Fixed Dome, DC 12V/PoE
84-EFD1100-1010	110-EFD1100-1F3	GV-EFD1100-1F 1.3MP 3.6mm Low Lux Target series Fixed Dome, DC 12V/PoE

Target Bullet IP Camera

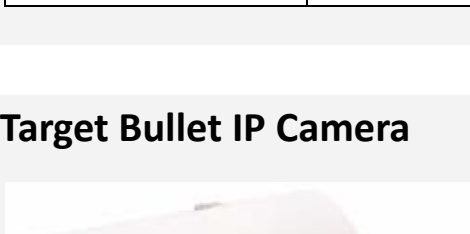

- 1/3" progressive scan low lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps at 1280 x 1024
- Intelligent IR
- Day and night function with IR-cut filter
- Wide Dynamic Range (WDR)
- Defog
- Vandal resistance (IK10 for metal casing)
- Ingress protection (IP67)
- Motion detection
- Tampering alarm
- Text overlay
- Privacy mask
- IP address filtering
- DC 12V / PoE
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

Models Available

SKU #	Ordering Part No.	Description
84-EBL1100-0010	110-EBL1100-0F3	GV-EBL1100-0F 1.3MP 3.6mm Low Lux Target series Bullet Cam, IP67, DC 12V/PoE
84-EBL1100-1010	110-EBL1100-1F6	GV-EBL1100-1F 1.3MP 6mm Low Lux Target series Bullet Cam, IP67, DC 12V/PoE