




CE-VX50

Vandal X True Day/Night IR Dome Camera

- SONY 1/3" CCD (Super HAD)
- 600 TVL Resolution
- 2.8 ~ 12mm (F1.2) Lens w/ True D/N Cut Filter
- 33 Built-in IR LEDs
- Built-In Heaters
- S5 Digital Signal Processor
- Digital Noise Reduction (DNR)
- Sense Up Feature for Optimal Night Image
- Digital Image Stabilization (DIS)
- Back Light Compensation (BLC)
- High Light Compensation (HLC)
- OSD Menu Control (Built-in Joystick or CE-REMOTE)
- 3-Axis Adjustment
- DC12V / AC24V
- UL Listed

Dimensions

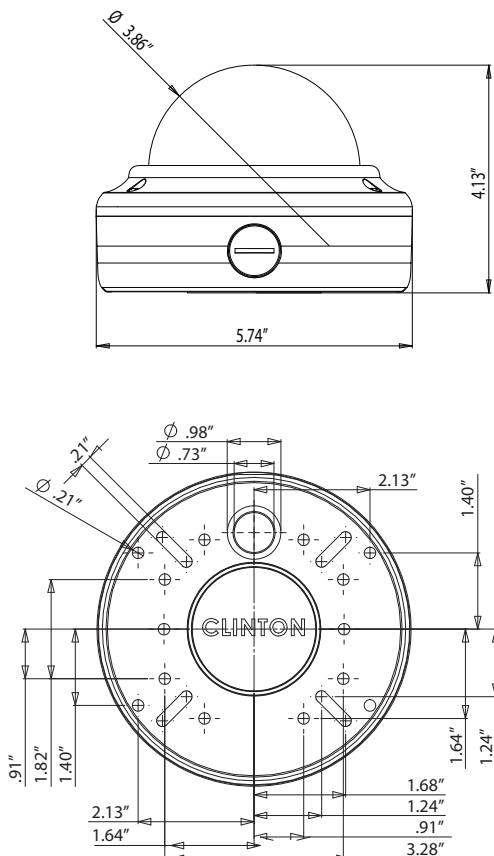

Recommended Power Supply

All Clinton Electronics Power Supplies

Optional Accessories

- | | |
|------------------------------|----------------------------------|
| CE-VXWB | Wall Mount Bracket |
| CE-VXRB | Black Rubber Vandal X Dome Cover |
| CE-VXRW | White Rubber Vandal X Dome Cover |
| CE-REMOTE | |
| - Plugs directly into Camera | |
| - Adjusts OSD Functions | |
| - Test Monitor Connection | |

Specifications

Camera	CE-VX50
Image Sensor	1/3 Inch SONY (Super HAD) CCD
Resolution	600 TV Lines
IR LEDs	33 pcs
Effective Pixels	768 (H) x 494 (V)
Scanning System	2:1 Interlace
S/N Ratio	52dB (AGC Off, Weight ON)
Sync System	Internal / Line Lock
Scanning Frequency	15.734 KHz (H), 59.94 Hz (V)
Minimum Illumination	0.000006 Lux (Sense-UP *512 & IR LEDs On)
Shutter Speed	1/60 ~ 1/100,000 sec.
Dynamic Range	62dB (Max.)
Lens	2.8 ~ 12mm (F1.2) w/True D/N Filter
Video Output	1.0 Vp-p, 75Ω
Power Consumption	Max. 300mA (AC24V), Max. 850mA (DC12V)
Power Requirement	DC12V / AC24V
Operating Temperature	-20°F ~ 122°F
Operating Humidity	95%
Weather Rating	IP 68
Dimensions	5.74" (Dia.) x 4.13" (H)
Weight	3.1 lbs.
OSD Menu	Control with OSD Joystick or CE-REMOTE
Lens	DC Video
Exposure	Brightness / Shutter / AGC / Sens-Up / Return
White Balance Control	ATW / Outdoor / Indoor / Manual / AWC->SET
SSDR	OFF / ON
Back Light	OFF / BLC / HLC
Digital Noise Reduction	OFF / ON
Day/Night	Auto / Color / B&W / Extern
Special	Image Adj/ Monitor/ Cam Title/ Sync/ Motion/ Privacy / Comm Adj / Language / Return
Exit	Save / Not Save / Exit

Information in this document is subject to change

