

DA-220

MULTIPLE INPUT DISTRIBUTION AMPLIFIER, COAX




KEY FEATURES:

- (2) 1x2 Distribution amp
- Differential inputs
- Variable gain control
- Coax Inputs
- High quality Color video performance
- Industrial grade specifications
- HF Compensation
- Made in the USA

The **DA-220** is a Differential input, ground loop blocking, high performance Dual 1x2 Color Video Distribution Amplifier. The **DA-220** has Gain and HF adjust to compensate for signal loss for each channel. The differential input amplifier is used to minimize or eliminate ground loop problems. Will compensate for approx. 1200 feet of coax.

SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs:	Composite Video	V Tilt:	<1%
Input Connectors:	BNC	CCMR:	Type. 60dB @ 4Mhz
Input Level:	1vpp Into 75 Ohms	High Freq. Boost:	Type 0+/- 10dB
Input Impedance:	75 ohm +/-5%	Power Requirements:	
Output:	2x Per Input	DC Operation:	12 to 18VDC Isolated Source
Output Connector:	BNC	DC Power Draw:	Based On Card Installed In Unit
Output Impedance:	75 ohm +/-5%	Power Connector:	3.5mm Phono
Gain In/Out:	+/-3dB	Mechanical:	
Diff Gain:	<1%	Size:	5.50"W, 6.25"D, 1.6"H
Diff Phase:	<1°	Weight:	1.0lbs
Frequency Response:	0-15mHz +/- .5dB		
Power / Supply Hum:	<63dB		

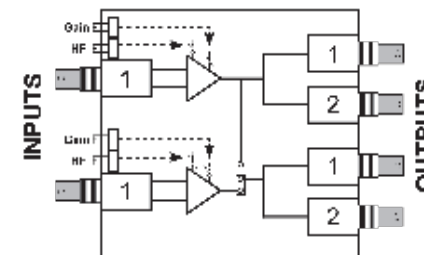

P.O. Box 749
Peekskill, NY 10566
Phone: (845) 737-7009
Fax: (845) 737-0426
www.compuvideosystems.com

All Specifications Subject To Change Without Prior Notification