

BNC COLOR CAMERA



HIGH RESOLUTION IMAGE CAPTURE


MODEL: DM/CAM/BC4/A

FEATURES

- High-performance 1/3" Sony DSP color CCD Technology
- 24V AC OR 12VDC / 220-240V AC
- Emphasizes simplicity by refined cosmetic design
- High degree of compatibility with video or DC-type lenses
- Supports standard C or CS mount lenses
- Quick connection to auto iris lens with 4-pin connector
- AGC adjustment
- Include BLC function
- 3 Year Warranty

SPECIFICATION

MODEL	HICB 3X5H
POWER	
Power source	AC 24V +/-10%, 50/60Hz +/- DC 12V +/-10%
Power consumption	3.2 Watts
GENERAL	
Image sensor	1/3" interline transfer CCD [SONY DSP]
Picture element (HxV)	NTSC High resolution(HICB365H) : 811 x 508
Scanning system	2:1 interlace
Scanning frequency	NTSC : 15.75KHz(H), 60Hz(V)
Operating temperature	10°C ~ 50°C (14°F~122°F)
Sync. system	Line lock / Internal
Electronic shutter	NTSC : 1/60 ~ 1/100,000 sec.
VIDEO	
Signal format	NTSC : 525 lines
Resolution	NTSC : High 480 TVL Normal 330TVL
Min. Illumination	NTSC High resolution : 0.8 Lux (F1.2 Lens, 50IRE)
Video output	1.0 Vp-p (75 ohm)
White balance	ATW [2800~8000K]
S/N ratio	50dB (AGC off)
FUNCTION	
Auto/Man. Shutter	Auto (on). Manual (off) (dip switch) Manual shutter (8 mode NTSC : 1/60, 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000)
Flickerless (F.F)	ON / OFF (Dip switch)
BLC	ON / OFF (Dip switch)
EI	ON / OFF (Dip switch)
Auto iris lens	DC / VIDEO (Dip switch)
AGC select (when AGC on)	NOR / HI (Dip switch)
AGC	ON / OFF (Dip switch)
White balance	ON / OFF (4 Mode : ATW, Quick, Indoor, Outdoor) (Dip switch)
Sync.	Internal / Line lock (Dip switch)
CONNECTOR & MECHANICAL	
DC iris level	Adjustable (volume)
Phase level	Adjustable (volume)
Video output	BNC
Power input	3-pin terminal block (push type connector)
Auto iris output	4-pin mini din jack
Lens mount	C/CS (Selected through back focus)
Mounting hole	1/4"-20 UNC top and bottom
Dimensions (WXHxD)	62 x 54 x 127mm
Weight	265g

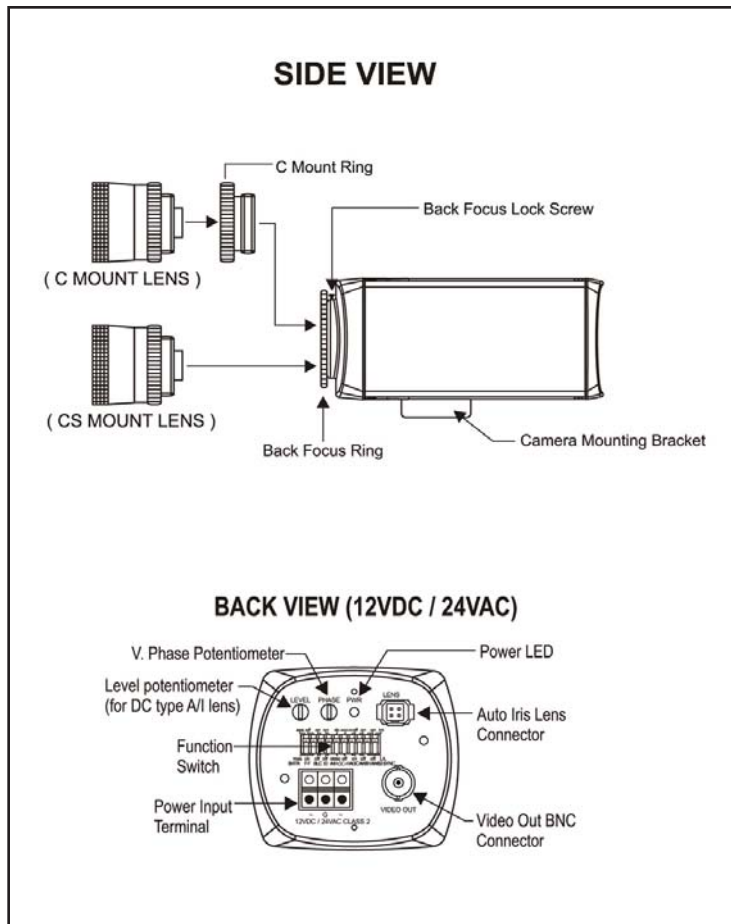

PRODUCT CODES

BNC COLOR CAMERA

DM/CAM/BC4/A

PLEASE CHECK THE WEBSITE FOR DETAILS OF COMPATIBLE PRODUCTS AND OTHER LATEST DEVELOPMENTS



Dedicated Micros USA

14434 Albemarle Point Place, Suite 100, Chantilly, Virginia 20151 USA Toll Free: 800 864-7539
Tel: +1 703 904-7738 Fax: +1 703 904-7743 and 23456 Hawthorne Blvd. Suite 100, Torrance, CA 90505,
Tel: +1 310 791-8666 Fax: +1 310 791-9877.

Dedicated Micros Canada

5580 Explorer Drive, Suite 501, Mississauga, Ontario L4W 4Y1 Tel: +1 905-602-6222 Fax: +1 905-602-6221

Dedicated Micros UK

1200 Daresbury Park, Daresbury, Warrington, WA4 4GB Tel: +44 (0) 845 600 9500 Fax: +44 (0) 845 600 9504

Dedicated Micros Germany

Neckarstraße 15, 41836 Hückelhoven, Germany Tel: +49 243 352 580 Fax: +49 24 33 52 58 10.

Dedicated Micros France

9-13 rue du Moulinet, 75013 Paris, France Tel: +33 1 45 81 99 99, Fax: +33 1 45 81 99 89.

Dedicated Micros Asia

16 New Industrial Road, #03-03 Hudson Techno Centre, Singapore 536204 Tel: +65 62858982 Fax: +65 62858646.

Dedicated Micros Australia

5/3 Packard Avenue, Castle Hill, NSW 2154, Australia Tel: +612 9634 4211 Fax: +612 9634 4811.

Dedicated Micros Malta

UB 2, San Gwann Ind. Est., San Gwann, Malta Tel: +356 21483 673 Fax: +356 21449 170.

Dedicated Micros Middle East

Building 12, Suite 302, P.O.Box 500291, Dubai Internet City, Dubai, United Arab Emirates
Tel: +971 (4) 390 1015, Fax: +971 (4) 390 8655.

Dedicated Micros Slovenia

Delavska cesta 24, 4208 Sencur, Slovenia Tel: +386 4 279 18 90 Fax: +386 4 279 18 91.

Dedicated Micros Benelux

Joseph Chantraineplantsoen 1, 3070 Kortenberg, Belgium Tel: +32 2751 3480 Fax: +32 2751 3481.

The manufacturer reserves the right to change the specification without notice.

All trademarks are courtesy of registered owners. The DM logo is a trademark of Dedicated Microcomputers Group Ltd.

MKT-DMCAM-BC4A-001E Rev. 5/07

www.dedicatedmicrosus.com

