




DS-2CC502/512/592N Color Dome Camera

- Compact design
- 1/3" Sony CCD
- Day/night with auto switch
- Min. Illumination: 0.1Lux@F1.2, color to B/W auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation

Unit: mm

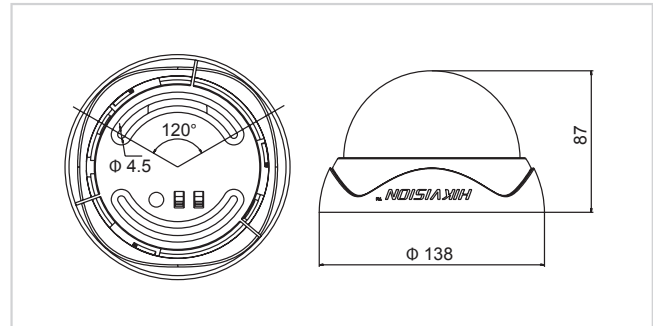

Specifications

		DS-2CC502N	DS-2CC512N	DS-2CC592N
Camera	Image Sensor	1/3 inch SONY Super HAD CCD		
	Effective Pixels	NTSC: 510 (H) × 492 (V)	NTSC: 768 (H) × 494 (V)	NTSC: 768 (H) × 494 (V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	NTSC		
	Min. Illumination	0.1Lux @ F1.2		
	Electronic Shutter Speed	1/50 (1/60)s to 1/100,000s		
	Day&Night	Electronic		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω / BNC)		
	S/N Ratio	More than 48 dB		
Lens	BLC	ON		
	Lens	3.6mm @ F2.0 (2.8mm, 6mm, 8mm, 12mm, 16mm option)		
General	Power Supply	12VDC, ±10% , (-A) Support 24VAC / 12VDC		
	Power Consumption	2W MAX		
	Working Temperature	-10°C~60°C		
	Dimensions(mm)	Φ138 x 87 (Φ5.5" x 3.45")		
	Weight	380g (0.83lbs)		