



GOLDEN STATE INSTRUMENT CO.

GS-6285SFHBH

CCTV Camera Housing

W/Heater & Blower &

1/3" Star Force Camera

(Sun Shield & Mounting Bracket Included)




FEATURES:

- Medium indoor / outdoor enclosure
- Spring assisted rear opening lid
- Aluminum construction
- Dimension inside to accommodate Camera, lens & connector

- Temperature reduced by 3 °C-5°C with sun shield
- 2 UL cable entry grommets on bottom of enclosure with maximum wire diameter of 1.3cm


Wiring Diagram

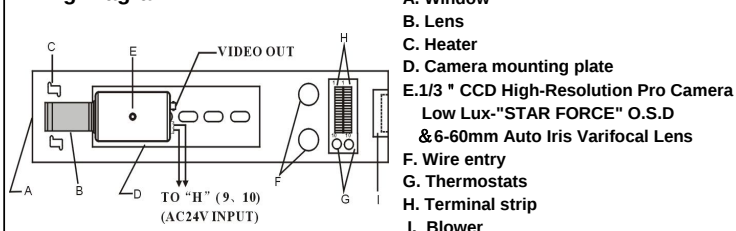


TERMINAL STRIP WIRING

1. Camera Power(+) (if using 12vdc)
2. Camera Power(-) (if using 12vdc)
3. Lens Com (if using video control)
4. Focus (if using video control)
5. Zoom (if using video control)
6. Iris (if using video control)
7. Not used
8. Ground
9. Enclosure Power } 24 VAC
10. Enclosure Power

Dimension Drawing



enclosure dimension	GS-6285 SFHBH
A	16.34"(41.5cm)
B	12.83"(32.6cm)
C	5.33"(13.55cm)

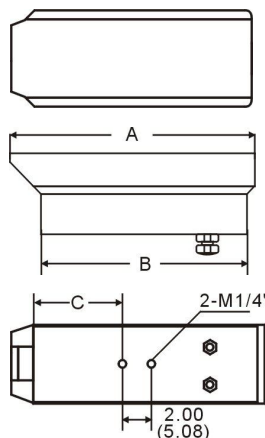

Specifications:

Model	GS-6285 SFHBH
Input Voltage	24 VAC / 1000mA (Max.)
Power	Camera: 3W Heater: 20W Blower: 2.3W
TV System	NTSC
Image Sensor	1/3" CCD HIGH-RESOLUTION PRO Image Sensor
Minimum Illumination	0.001 Lux /F1.4 (Sens-Up)
Lens	5-50mm Auto Iris Varifocal Lens
Resolution	530 TV lines
Video Output	1.0Vp-p composite video @ 75 ohm
Construction	Aluminum
Viewing Window	2.13"(53mm)
Max. Size Camera & Lens	8.5"x3.54"x2.85" (215.9x89.91x72.39mm)
Heater & Blower Activates	ON: 50°F±9°F (10°C±5°C) OFF: 68°F (20°C)
Blower Activates	ON: 95°F±9°F (35°C±5°C) OFF: 72°F (22°C)
Weight - Camera Housing	3.74 lbs (1.7 kg)

THIS PACKAGE INCLUDES:

- 1 Housing with heater, blower and sun shield
- 1 1/3" CCD High-Resolution Pro Camera
- 1 5-50mm / F1.4 Auto Iris Varifocal Lens
- 2 Cord grip
- 2 Screws (1/4-20 X 5/8") for housing to bracket
- 1 Screw (1/4-20 X 3/8") for camera
- 1 Mounting Bracket (Housing only)
- 3 Screws for bracket to wall bracket
- 3 Plastic anchors

14256 Doolittle Drive-San Leandro, CA 94577-1-800-227-2330-Fax(510)352-5988

Website: www.goldenstateinst.com E-mail: gsi@goldenstateinst.com