

## GV-FE4301 4MP H.264 WDR Fisheye IP Camera



### Introduction

The GV-FE4301 is a fisheye camera that allows you to monitor all angles of a location using just one camera. The distorted hemispherical image of the fisheye camera will be converted into the conventional rectilinear projection.

Without installing any software, you can watch live view and utilize functions such as motion detection, privacy mask, and alert notification through the Web interface using an IE browser. In addition, the GV-FE4301 seamlessly integrates with the GV-System, providing advanced monitoring and video management features.

The GV-Fisheye IP Camera is designed to be mounted on the ceiling, wall or ground. There are two ways to mount the GV-FE4301 on the ceiling, Hard Ceiling Mount and In-Ceiling Mount. In-Ceiling Mount allows the GV-FE4301 to be mounted into the ceiling, revealing a small portion of the camera.

### Key Features


- 4 MP progressive scan CMOS
- H.264 and MJPEG
- Electronic day and night function
- Wide Dynamic Range (WDR)
- Provides 360° and 180° panorama view
- No mechanical moving parts
- Built-in Micro SD (SDHC / SDXC) card slot for local storage
- Virtual PTZ function
- Auto Pan function
- Object tracking
- Built-in Web server for monitoring through IE browser
- Different angle of view controllable by multiple users at the same time
- Up to 15 fps at 2048 x1944
- Built-in microphone and speaker
- One sensor input and alarm output
- DC 12V / AC 24V / PoE
- Playback from any view angle and zoom level
- Privacy mask to cover parts of the image that should not be viewable
- Visual automation
- Tampering alarm
- Text overlay
- 31 languages on web interface
- ONVIF (Profile S) conformant

\* No Memory Card Slot & local storage function for Argentina.

Fisheye Source Image



Single View

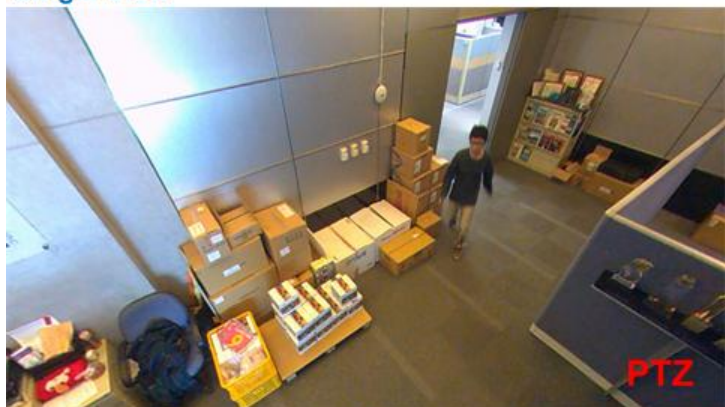

2 x 180° View




360° View



Quad View



## Dimensions

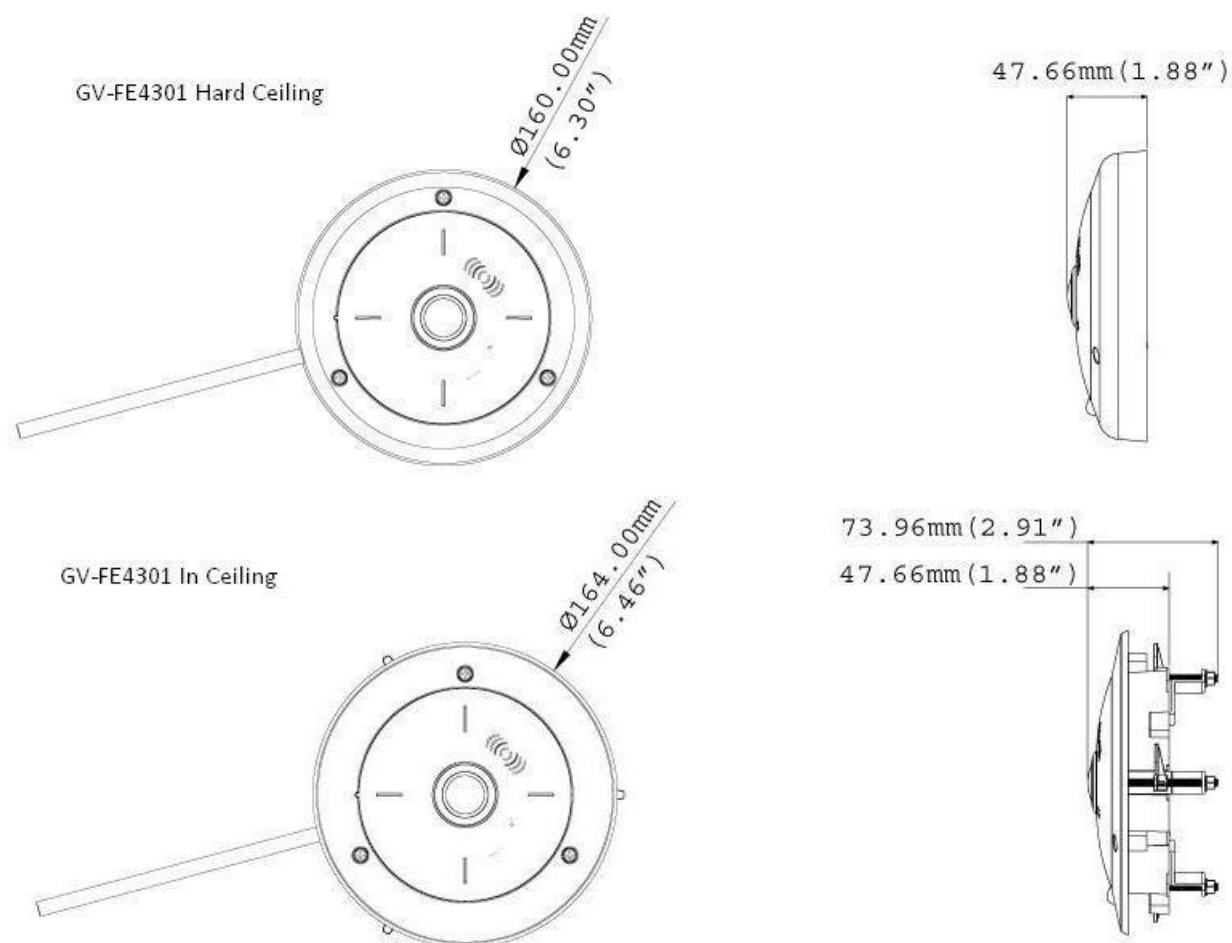

## Specifications

System Requirements		
OS	32-bit	Windows XP / Vista / 7 / Server 2008
	64-bit	Windows 7 / Server 2008
GV-System Version		GV-System V8.5.6 with patch or later
Browser		Internet Explorer 7.x or later
Camera		
Image Sensor		1/2.5" progressive scan CMOS
Picture Elements		2048 (H) x 1944 (V), 1440(H) x 1376 (V)
Minimum Illumination	Color	0.15 Lux
	B/W	0.10 Lux
Shutter Speed		Automatic, Manual (1/5 – 1/8000 sec.)
White Balance		Automatic, Manual (2800K – 8500K)
Gain Control		Automatic
S/N Ratio		45 dB
Optics Lens		
Megapixel		Yes
Day/Night		Yes (electronic)
Iris		Fixed Iris
Focal Length		1.05 mm
Aperture		F/2.8
Mount		M12, Pitch 0.5 mm
Image Format		1/2"
Operation	Focus	Fixed
	Zoom	Fixed
	Iris	Fixed

Operation			
Video Compression		H.264, MJPEG	
Video Streaming		Single stream from H.264 or MJPEG	
Frame Rate		15 fps	
Image Setting		Brightness, Contrast, Sharpness, Gamma, White Balance, Flicker-less, Backlight Compensation, Image Orientation, Shutter Speed, Day / Night, WDR, Defog	
Audio Compression		G.711	
Two-way Audio		Yes	
Sensor Input		1 Digital Input (Dry Contact)	
Alarm Output		1 Digital Output	
Network			
Interface		10/100 Ethernet	
Protocol		HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, RTSP, PSIA, SNMP, QoS (DSCP), ONVIF (Profile S)	
Mechanical			
Lens Mounting		M12, Pitch 0.5 mm (0.02")	
Temperature Detector		Yes	
Mechanical			
Connectors	Power	Terminal block (3 pin), PoE	
	Ethernet	Ethernet (10/100 Base-T), RJ-45 Connector	
	Audio	Built-in microphone and speaker	
	Digital I/O	I/O Wire	
	Auto Iris	None	
	Local Storage	Micro SD memory card slot (SDHC / SDXC for Class 6 card or above)	
	TV-Out	None	
General			
Environment Temperature		0 °C ~ 50 °C (32 °F ~ 122 °F)	
Humidity		10% to 90% (no condensation)	
Power Source		12V DC / 24V AC / PoE (IEEE802.3af)	
Max. Power Consumption		5 W	
Dimension	Camera Body	Hard-Ceiling Mount	ø 160 x 47.66 mm (6.30" x 1.88")
		In-Ceiling Mount	ø 164 x 47.66 mm (6.46" x 1.88")
	Cable Length		1 m (3.28 ft.)
	Cable Diameter		ø 8 mm (0.31")
	Maximum Connector Diameter		ø 28.5 mm (1.12")
Weight		650 g (1.43 lb)	
Regulatory		CE, FCC, C-Tick, RoHS compliant	
Power over Ethernet			
PoE Standard		IEEE 802.3af Power over Ethernet / PSE	
PoE Power Supply Type		End-Span	
PoE Power Output		Per Port 48V DC, 350mA. Max. 15.4 watts	
Web Interface			
Installation Management		Web-based configuration	
Maintenance		Firmware upgrade through Web Browser or Utility	
Access from Web Browser		Camera Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Digital I/O Control, Audio, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Auto Pan Function, Virtual PTZ, Motion Detection, Wide Angle Lens Dewarping, Text Overlay, Digital PTZ	
Language		Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian /Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish	

Applications	
Network Storage	GV-NVR, GV-System, GV-Backup Center, GV-Recording Server
Live Viewing	IE , mobile phone
CMS Server Support	GV-Control Center, GV-Center V2, GV-VSM




**Note:** Specifications are subject to change without notice.

### Packing List

- |                                      |                                    |
|--------------------------------------|------------------------------------|
| 1. Fisheye Camera                    | 5. Camera Cover (In-Ceiling Mount) |
| 2. Camera Cover (Hard Ceiling Mount) | 6. Screw (In-Ceiling Mount) x 3    |
| 3. Screw (Hard Ceiling Mount) x 3    | 7. Support Bracket x 3             |
| 4. Plastic Screw Anchor x 3          | 8. Torx Wrench                     |

### Accessories

Model No.	Name		Details
GV-Mount100	Straight Tube and Junction Box Kit		Dimensions: 200 x 170 x 257.5 mm (7.9" x 6.7" x 10.1") Weight: 3.17 Kg (6.99 lb)
GV-Mount101	Straight Tube Kit		Dimensions: 219 x 125 x 332 mm (8.6" x 4.9" x 13.1") Weight: 1.8 Kg (3.97 lb)
GV-Mount200	Wall Pendant Tube		Dimensions: 225 x 140 x 250 mm (8.9" x 5.5" x 9.8") Weight: 900 g (1.98 lb)
GV-Mount203	Wall Pendant Tube and Junction Box Kit		Dimensions: 315 x 195.5 x 225 mm (12.4" x 7.7" x 8.9") Weight: 2.95 Kg (6.5 lb)
GV-Mount300	Convex Corner Adapter Kit		Dimensions: 238.6 x 409.5 mm (9.4" x 16.1") Weight: 4.27 Kg (9.41 lb)

Model No.	Name		Details
GV-Mount310	Concave Corner Adapter Kit		Dimensions: 238.6 x 409.5 mm (9.4" x 16.1") Weight: 4.27 Kg (9.41 lb)
GV-Mount400	Pole Mount Bracket Kit (Ø 4" ~ 6")		Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 Kg (3.75 lb) Steel Strap Diameter: Ø 4" ~ 6"
GV-Mount410	Pole Mount Bracket Kit (Ø 6" ~ 7.5")		Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 Kg (3.75 lb) Steel Strap Diameter: Ø 6" ~ 7.5"
GV-Mount702	Extension Tube		<b>Four</b> options are available. Dimensions: Ø 5.4 x 10 or 20 or 30 or 50 cm (Ø 2.1" x 3.9" or 7.9" or 11.8" or 19.7") Weight: 180 g or 390 g or 550 g or 800 g (0.4 lb or 0.86 lb or 1.21lb or 1.76 lb)
GV-Mount903	Fisheye Dome Housing		Dimensions: Ø 186 x 97.5 mm (Ø 7.3" x 3.8") Weight: 700 g (1.54 lb)
GV-Mount904	Tilting Wall Mount Bracket		Dimensions: Ø 159.1 x 40.5 mm (Ø 6.3" x 1.6") Weight: 400 g (0.88 lb)
GV-PA191	Power over Ethernet (PoE) Adapter		The GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable.
<b>Power Adapter</b>			Power adapters are available in 4 regions: U.S.A., Australia, U.K and Europe.
<b>GV-POE Switch</b>			The GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.