

**Video • Data • Power**

***HubWay***<sup>®</sup>

***Passive UTP Transceiver Hub  
with Integral Camera Power***

## ***Installation Guide***

***Models Include:***

### ***HubWay8DS***

*- UL Listed eight (8) Channel Passive UTP Transceiver Hub with Integral Camera Power*

### ***HubWay82DS***

*- UL Listed eight (8) Channel Passive UTP Transceiver Hub with Integral Camera Power  
- Includes eight (8) UL Listed Accessory HubWayAv Video Balun/Combiners*

### ***HubWay83DS***

*- UL Listed eight (8) Channel Passive UTP Transceiver Hub with Integral Camera Power  
- Includes eight (8) UL Listed Accessory HubWayDv Video Balun/Combiners*



Rev. 070908



**More than just power.™**

## **Overview:**

Altronix HubWay8DS Passive UTP Transceiver Hub w/Integral Camera Power transmits UTP video, RS422/RS485 data and power over a single CAT-5 or higher structured cable. Unit provides 8 camera channels in a space saving 1U EIA 19" rack mount chassis which may be rack, wall or shelf mounted. Video transmission range is up to 750 ft. max. per channel. Units are compatible with AC and/or DC fixed or PTZ cameras when utilizing Altronix HubWayAv, HubWayDv or HubWayDvi Video Balun/Combiners. In addition, the unit features individually selectable 24VAC or 28VAC, PTC protected outputs with surge suppression. An optional HubSat4D Passive UTP Transceiver Hub with Integral Camera Power unit can be used as an accessory module to transmit video from up to 4 cameras over a single CAT-5 or higher structured cable back to the HubWay8DS. In addition, the HubSat unit provides power to these cameras locally to eliminate the possibility of voltage drop associated with long cable runs.

## **HubWay8DS Specifications:**

### **Agency Listings:**

- UL Listed for Commercial CCTV Equipment (UL 2044).

### **Input:**

- 115VAC 60Hz, 1.5 amp or 230VAC 50/60Hz, 1 amp.

### **Video:**

- Eight (8) channels of video over twisted pair up to 750 ft.
- Eight (8) 75 ohm video outputs.

### **Data:**

- RS422/RS485 data inputs.

### **Power:**

- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- Unit provides up to 1 amp max. per channel not to exceed a total of 5 amp (150VA) maximum current.
- PTCs are rated @ 1 amp per channel.
- Surge suppression.

### **Additional Models:**

#### **HubWay82DS**

- HubWay8DS with eight (8) UL Listed Accessory HubWayAv Video Balun/Combiners for 24VAC Cameras.

#### **HubWay83DS**

- HubWay8DS with eight (8) UL Listed Accessory HubWayDv Video Balun/Combiners for 12VDC Cameras.

**WARNING: To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes.**

## **Installation Instructions:**

1. Set the input voltage selector switch located on the left side of the HubWay8DS unit for 115VAC or 230VAC operation (*Fig. 1h, pg. 4*).
2. Attach mounting brackets to HubWay unit for rack or wall mount installation (*Figs. 6-7, pg. 8*). Affix rubber pads to HubWay for shelf installation (*Fig. 8, pg. 8*).
3. Secure the unit in a rack, mount unit to a wall or place unit on a shelf as desired (unit should be spaced at least 3" from any video monitors).
4. Set illuminated master power disconnect circuit breaker to the (OFF) position (*Fig. 5, pg. 7*).
5. Plug the grounded AC line cord (included) into the IEC 320 connector of the HubWay8DS unit (*Fig. 1e, pg. 4*). Insert the plug end of the line cord into a grounded AC receptacle.
6. Set voltage output selector switch of each camera channel for 24VAC or 28VAC (*Fig. 1a, pg. 4*).

7. Connect the BNC video outputs for HubWay8DS Channels 1-8 to the corresponding video inputs on the head end equipment (DVR) (*Fig. 1d, pg. 4*).
8. Connect the RS422/RS485 output of the head end equipment (DVR) to the data input terminal block of the HubWay8DS unit (polarity must be observed) (*Fig. 1c, pg. 4*).
9. Connect Video Balun/Combiner at camera 1 to the HubWay8DS unit utilizing CAT-5 or higher structured cable. Plug the RJ45 connector at one end of the structured cable into the RJ45 jack marked [Channel 1] of the HubWay8DS (*Fig. 1g, pg. 4*). Plug the RJ45 connector at the opposite end of the structured cable into the RJ45 jack of the Video Balun/Combiner located at camera 1.
  - For 24VAC cameras use Altronix model HubWayAv Video Balun/Combiner (*Figs. 2a, 2b, pg. 5*).
  - For 12VDC cameras use Altronix model HubWayDv Video Balun/Combiner (*Figs. 2c, 2d, pg. 5*).
  - For non-isolated 12VDC cameras use Altronix model HubWayDvi Video Balun/Combiner (*Figs. 2c, 2d, pg. 5*).
 Repeat steps 6-9 for each additional camera (Channels 2-8).
 


**Note:** When a particular camera exceeds the maximum distance for power transmission, a local external power source is required. Optionally, an Altronix HubSat Passive UTP Transceiver Hub with Integral Camera Power unit may be utilized (*Fig. 4a, pg. 6*). The combined total cable distance must not exceed 750 ft. for video transmission between the HubWay8DS and each camera routed through the HubSat4D unit.
10. Set illuminated master power disconnect circuit breaker to the RESET (ON) position (*Fig. 5, pg. 7*) and measure the output voltage at the power output of each Video Balun/Combiner (*Figs. 2b, 2d, pg. 5*) before powering each camera to insure proper operation and avoid possible damage.
  - HubWayAv - Terminals marked [AC POWER] (*Figs. 2a, 2b, pg. 5*).
  - HubWayDv/HubWayDvi - Terminals marked [- 12VDC +] (*Figs. 2c, 2d, pg. 5*).
11. Set illuminated master power disconnect circuit breaker to the (OFF) position to make the final connections (*Fig. 5, pg. 7*).
12. Connect the power outputs of the HubWayAv, HubWayDv or HubWayDvi Video Balun/Combiners to the power inputs of the cameras (*Figs. 2a-2d, pg. 5*). Polarity must be observed.
13. Connect the terminals marked [+ DATA -] of the HubWayAv, HubWayDv or HubWayDvi Video Balun/Combiners to the data terminals of the cameras for PTZ control (*Figs. 2a-2d, pg. 5*). Polarity must be observed. When using fixed cameras disregard this step.
14. Connect the BNC connectors of the HubWayAv, HubWayDv or HubWayDvi Video Balun/Combiners to the BNC video outputs of the cameras (*Figs. 2a-2d, pg. 5*).
15. Upon completion of wiring set illuminated master power disconnect circuit breaker to the RESET (ON) position (*Fig. 5, pg. 7*).
16. The power LEDs (Red) located on the front of the HubWay8DS will illuminate when AC power is present (*Fig. 1c, pg. 4*).
 

**Note:** If any of these LEDs are not illuminated either a voltage output selector switch is in the OFF position or the PTC is tripped for that channel.

 To reset the PTC:
  1. Set the voltage output selector switch for that corresponding channel to the OFF position. Switch must remain in the OFF position for approximately 2 minutes in order for the PTC to reset.
  2. Eliminate the trouble condition (short circuit or overload).
  3. Set the voltage output selector switch for 24VAC or 28VAC (*Fig. 1a, pg. 4*).
17. AC LEDs (Green) of the HubWayAv or DC LEDs (Red) of the HubWayDv/HubWayDvi Video Balun/Combiners will illuminate indicating power is present at the cameras (*Fig. 2b, 2d, pg. 5*).

Fig. 1

**1a - Output voltage switches:**  
Selects 24VAC/28VAC/OFF for each output.

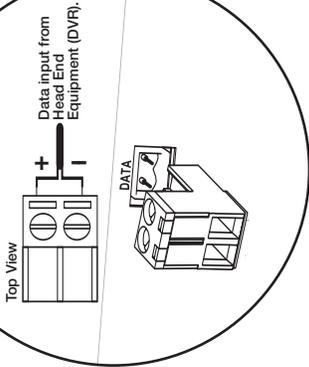

**1b - LED(s) 1-8:**  
Power indicators.

Rear



**1c - Data:** Removable terminal blocks for RS422/RS485 input from head end equipment (DVR) for PTZ control.


**1e - IEC 320 Connector:**  
115VAC/230VAC 50/60Hz (grounded line cord included).

**1d - BNC Connector:**  
Video outputs to head end equipment (DVR).

**1g - Channels 1-8:** CAT-5 or higher structured cable to Video/Balun Combiners at cameras 1-8. When linking HubWay UTP Transceiver Hubs to HubSat Remote Accessory Modules, any of these jacks will facilitate *data* transmission for PTZ control.

**1f - Channels 1-4 & Channels 5-8:**  
Links HubSat units enabling video transmission of up to four (4) cameras over a single CAT-5 structured cable.

**1h - Input Voltage Switch:**  
Selects 115VAC 60Hz/230VAC 50/60Hz (switch is located on the left side of the unit).




## HubWayAv, HubWayDv and HubWayDvi Video Balun/Combiners:

Altronix Model Number	Input Voltage from HubWay unit	Output Voltage to camera	Camera Type	Power LED
<b>HubWayAv</b>	*24VAC/28VAC	*24VAC/28VAC	24VAC cameras	Green
<b>HubWayDv</b>	*24VAC/28VAC	12VDC	12VDC cameras	Red
<b>HubWayDvi</b>	*24VAC/28VAC	12VDC electronically isolated	12VDC cameras without isolation	Red

\*Based on camera load and structured cable length.


Fig. 2

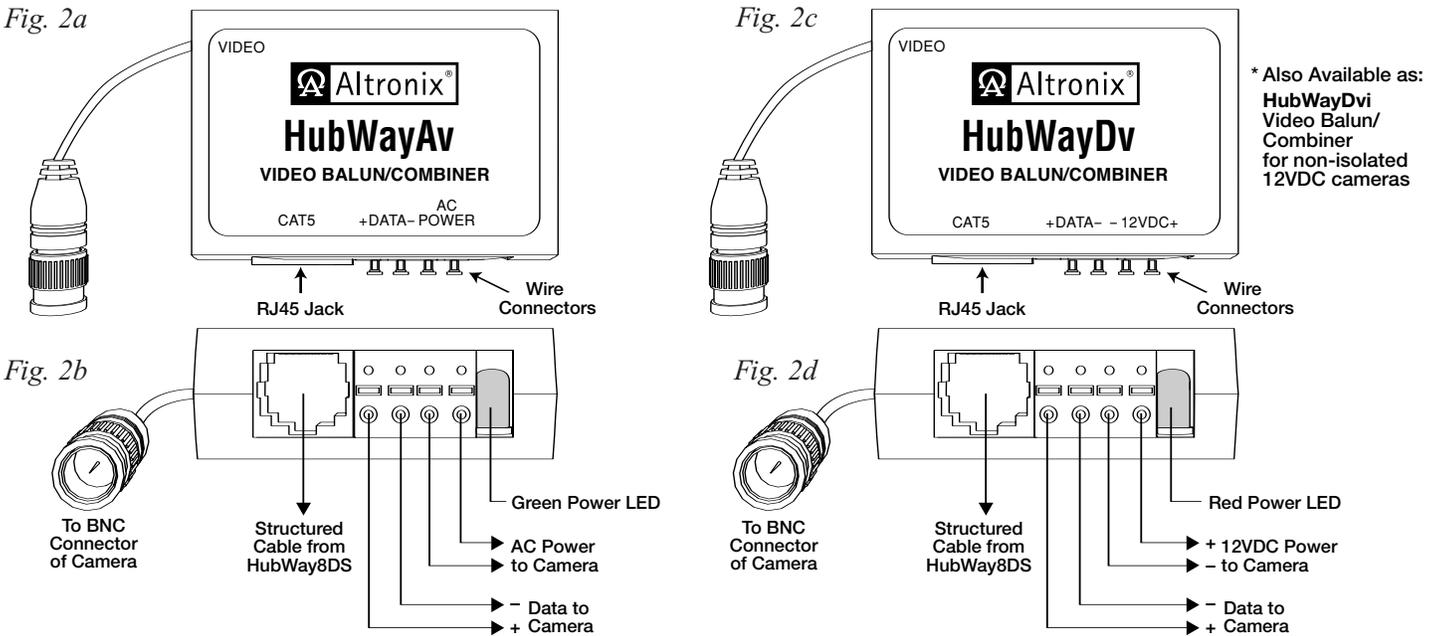

HubWayAv passes AC voltage from pins 4, 5, 7, 8 to terminals marked [AC Power] (Fig. 3, pg. 5).

HubWayDv/HubWayDvi converts AC voltage to DC voltage from pins 4, 5, 7, 8 to terminals marked [-12VDC +] (Fig. 3, pg. 5).

Fig. 3 - CAT-5 Structured Cable Wiring Color Codes and PIN Configurations

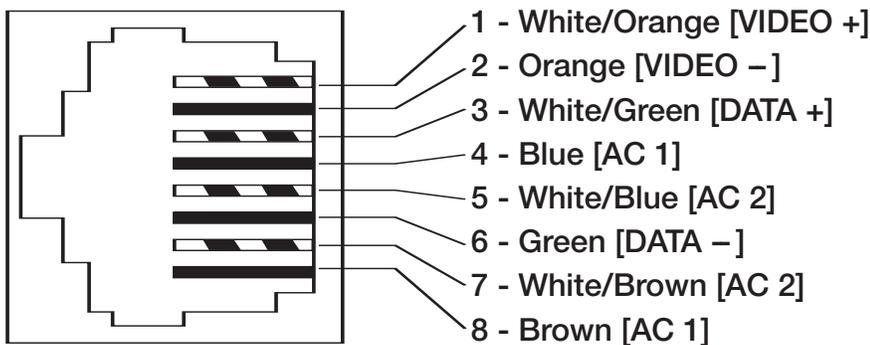

**Typical Applications:**

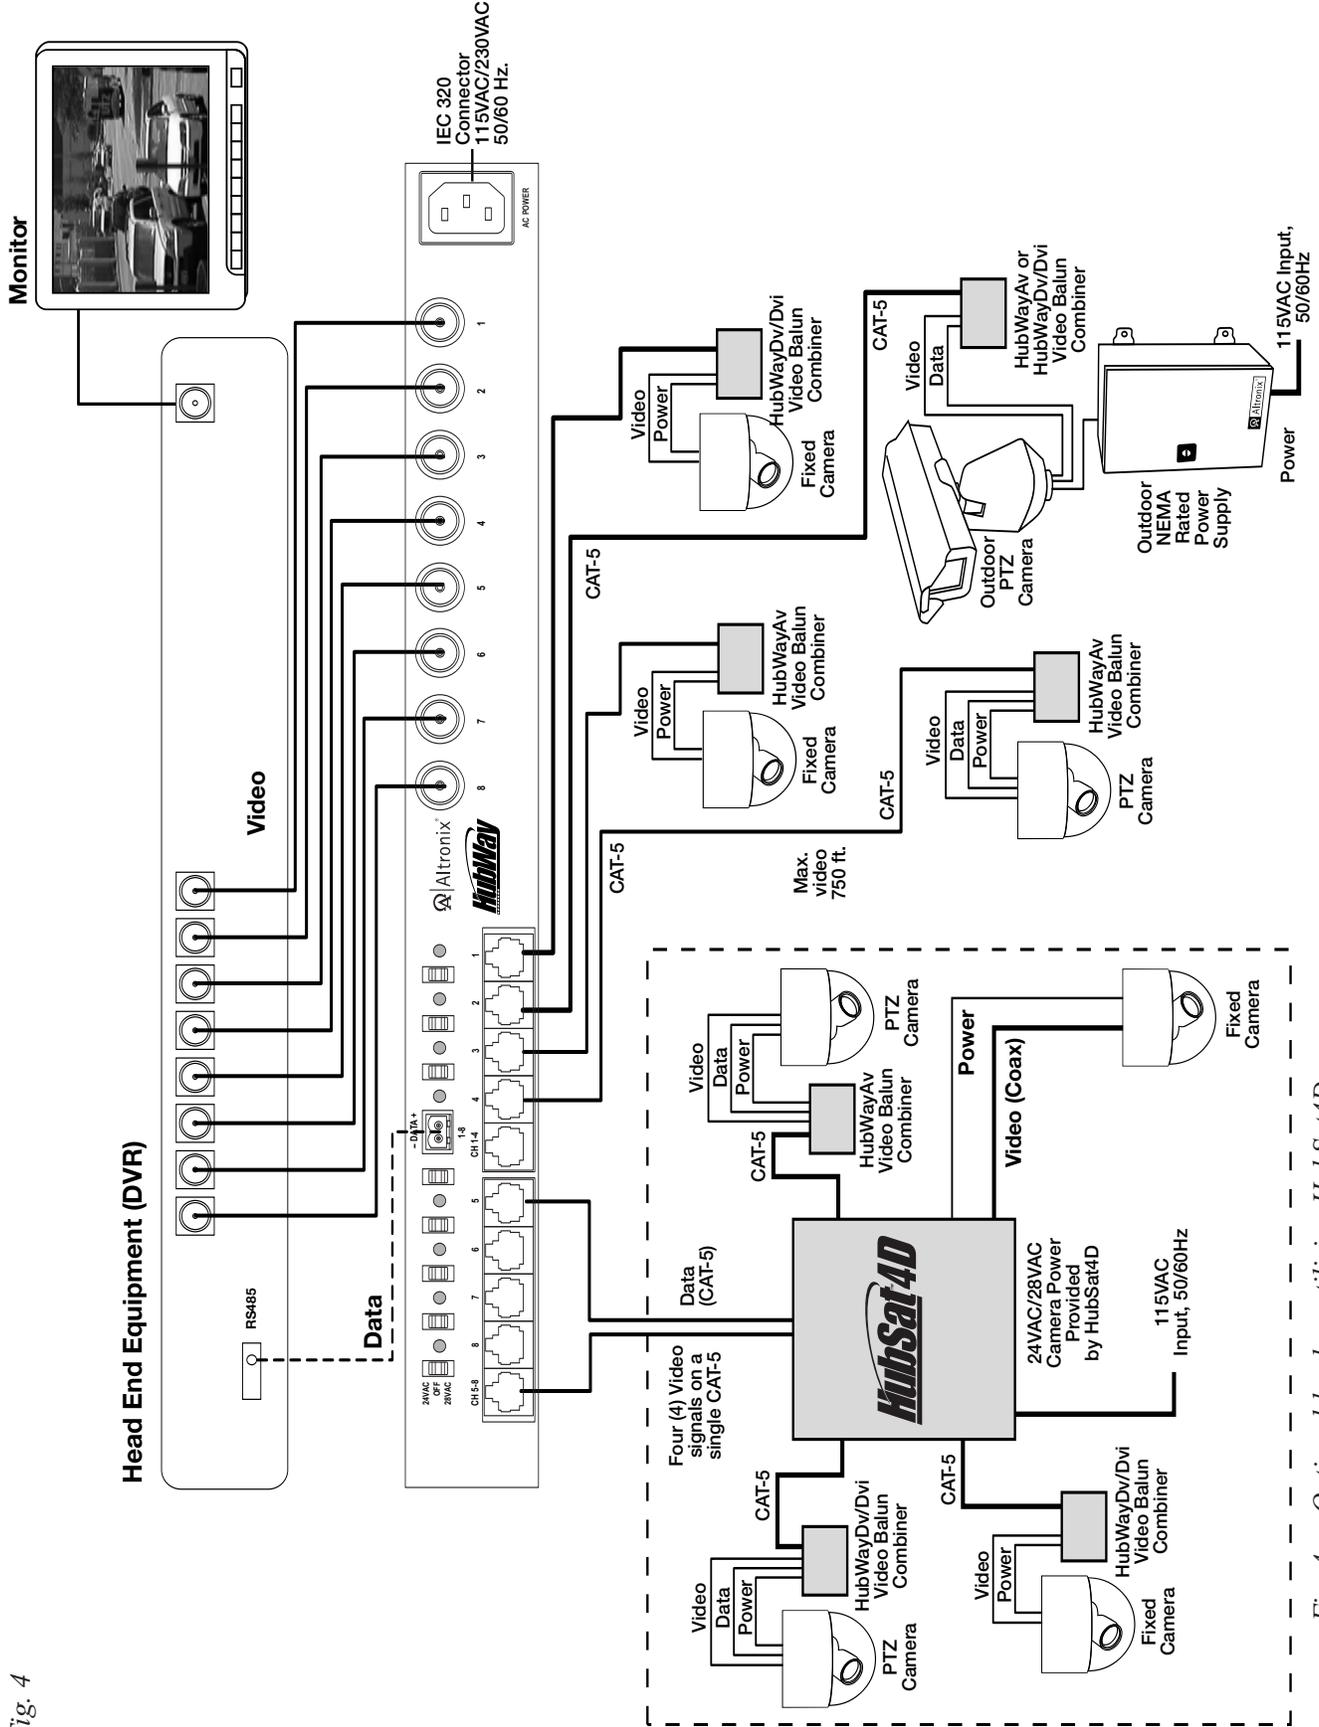


Fig. 4a - Optional hookup utilizing HubSat4D.

Fig. 4


# 1U EIA 19" Rack Mount Chassis Mechanical Drawing & Dimensions:

1.625"H x 19.125"W x 8.5"D

## REAR



## TOP & BOTTOM

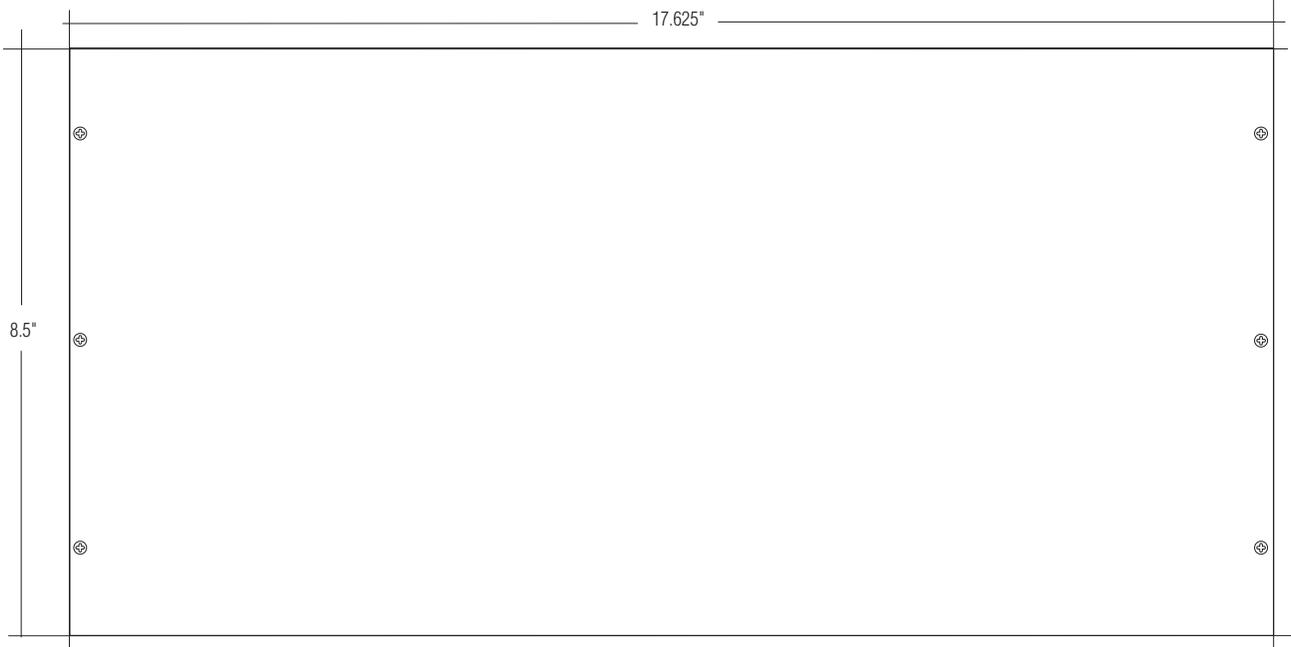

## FRONT





Fig. 5

Illuminated master power disconnect circuit breaker:

- OFF position Circuit breaker tripped – Switch not illuminated.
- RESET (ON) position – Switch illuminated.

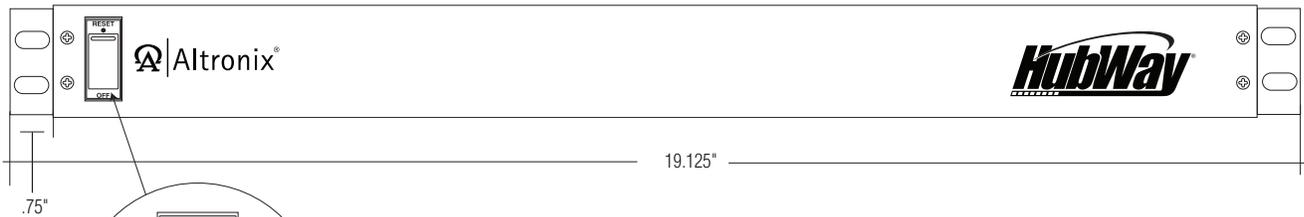

The lightning flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of an insulated “DANGEROUS VOLTAGE” within the products enclosure that may be of sufficient magnitude to constitute an electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



**CAUTION**  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN




**CAUTION:** To reduce the risk of electric shock do not open enclosure. There are no user serviceable parts inside. Refer servicing to qualified service personnel.

## Mounting Options:

### Rack Mount Installation

- 1- Remove and discard factory installed screws from both sides of rack chassis (Fig. 6a).
- 2- Install mounting brackets (A) on the left and right side of rack chassis using the four (4) flat head screws (B) (included) (Fig. 6b).
- 3- Place unit into desired EIA 19" rack position and secure with mounting screws (not included) (Fig. 6c).

Fig. 6

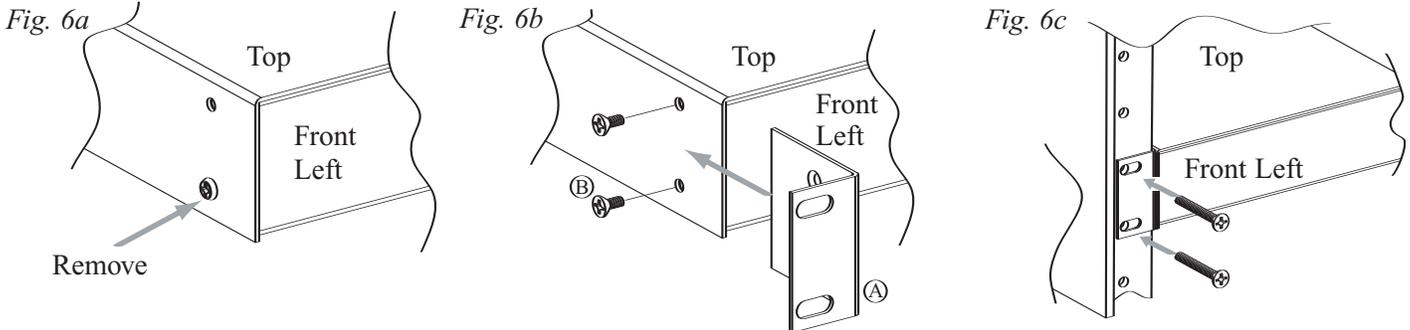

### Wall Mount Installation

- 1- Install mounting brackets (A) on the left and right side of rack chassis using four (4) flat head screws (B) (included) (Fig. 7a).
- 2- Place unit at desired location and secure with mounting screws (not included) (Fig. 7b).

**Caution:** It is necessary to make sure mounting screws are securely fastened to a beam when installing the unit vertically.

Fig. 7

Fig. 7a


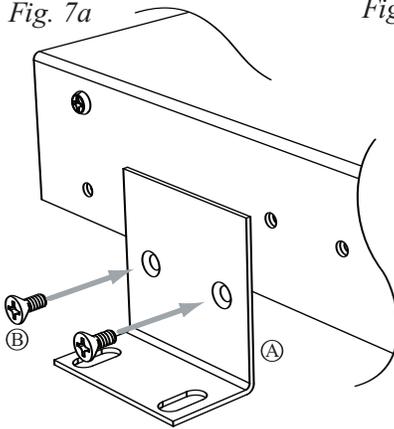


Fig. 7b

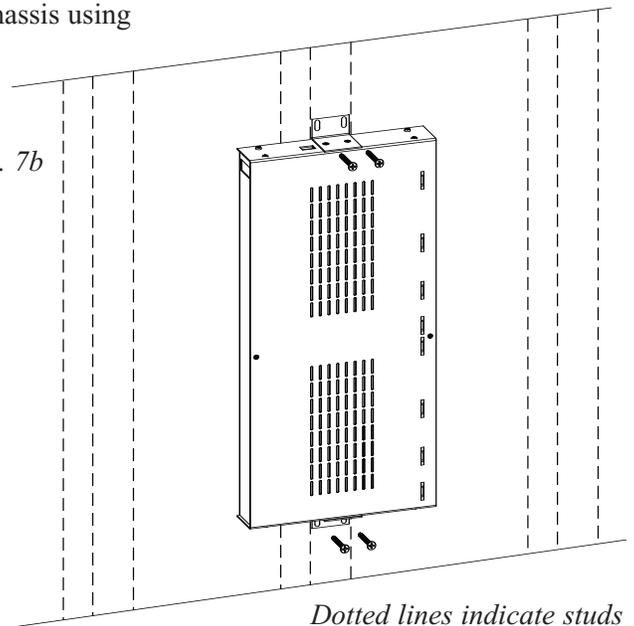


Dotted lines indicate studs behind sheetrock.

### Shelf Installation

- 1- Position and affix rubber pads (C) (included) at each corner on the bottom of the unit (Fig. 8).
- 2- Place unit in desired location.

Fig. 8

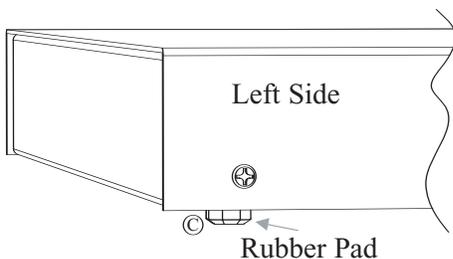

**Mounting Hardware (Included):**

	(A) Two (2) mounting brackets
	(B) Six (6) flat head screws for mounting brackets.
	(C) Four (4) rubber pads.

Altronix is not responsible for any typographical errors.

