


HTINTB8H
HTINTB8HW

2.8 - 12mm DC auto iris varifocal lens, dark grey housing

2.8 - 12mm DC auto iris varifocal lens, white housing

Features

- 700 lines of color resolution
- Amplify existing light with no distance limitations
- No problems caused by objects that reflect or absorb IR light sources
- Minimum illumination 0.00002 lux (Intensify @ 512x)
- 12VDC / 24VAC dual voltage operation
- Full OSD operation
- External controls for zoom & focus
- S/N Ratio more than 52dB (weight on)
- EZ mount system simplifies installation
- Relay outputs for motion detection
- Weather resistant operation
- IP66 compliant
- Anti-moisture glass and circuitry eliminates fog or condensation under any weather condition
- 5 year warranty

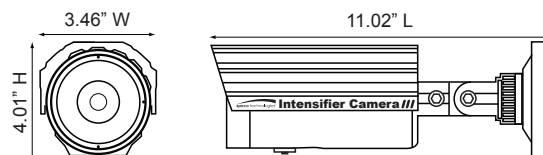

Now with Presets:

Outdoor, Indoor, Elevator,
Lobby, Hallway & Dark

Specifications

Image Sensor 1/3" 960H Sony Super-HAD™ CCD
Resolution..... 700 TV lines
Minimum Illumination..... CDS off: 0.15 lux
CDS on: 0.00002 lux
Total Pixels 976 (H) x 508 (V)
Effective Pixels 1020 (H) x 494 (V)
TV System..... NTSC, PAL
Scanning Frequency..... 15.734kHz (H) & 59.94Hz (V)
Scanning System..... 2:1 interlace
Synchronization..... Internal
S/N Ratio More than 52dB
Video Output..... CVBS: 1.0Vp-p / 75 Ohm
Electronic Shutter Speed..... 1/60 sec. – 1/120,000 sec.
OSD Available
WDR On / Off (level adjustable)
Backlight Compensation..... BLC / HLC / Off
Day & Night Color / BW / Auto / Ext
Gain Control High / Low / Off

White Balance ATW / Outdoor / Indoor / Manual /
AWC (1,700°K – 11,000°K)
Intensify Auto / Off (selectable 2x – 512x)
Motion Detection..... On / Off (8 programmable zones)
Privacy Masking On / Off (12 programmable zones)
Speco DNR..... On / Off (level adjustable)
Digital Zoom On / Off (1x - 16x)
DIS..... On / Off
Sharpness On / Off (level adjustable)
Flip / Mirror On / Off
Power Consumption 12VDC, 400mA / 24VAC, 170mA
Power Supply 12VDC / 24VAC dual voltage operation
(power supply not included)
Operating Temperature..... -4° F – 140° F
Dimensions..... 3.46" (W) x 4.01" (H) x 11.02" (L)
Weight 3 lbs.

Optional Accessories



Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.



Rev. 1/18/13

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com