


DA-4

AUDIO DISTRIBUTION AMPLIFIER

TECHNICAL DATA SHEET

DESCRIPTION

The Model DA-4 is an Audio Distribution Amplifier with one audio input and four audio outputs. It receives line level audio signals from a Louroe base station or Louroe microphone and distributes it to up to four devices such as DVR's, VCR's, CCTV monitors with amplifiers or other audio devices that accept line level input. Each output of the DA-4 has a gain adjust potentiometer for correcting audio level. Maximum gain is 15dB when potentiometer is fully engaged. Included with the DA-4 are five RCA connector cables and a 12Vdc power supply.

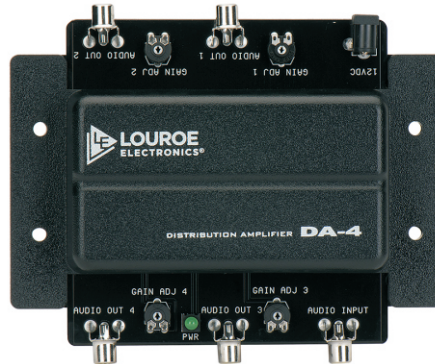

MODEL DA-4
Distribution Amplifier



AD-1 POWER SUPPLY



(5) SINGLE RCA CABLES

APPLICATION

For distributing audio to multiple (up to four):

- DVR's
- VCR's
- CCTV monitors with an amplifier

or any combination of the above including other audio receiving devices that accept line level input

FEATURES

- One audio input and four audio outputs (RCA)
- Power jack for applying 12Vdc power
120V/12Vdc power supply included
- Gain adjust for each audio output
- LED power indicator

IMPORTANT NOTICE

When this equipment is used as part of an audio monitoring system, the law requires that the public be given notice of AUDIO MONITORING ON THE PREMISES. A decal notice is included with each microphone shipped.



Federal Law References:
 Federal Regulations, US Code, Title 18.
 Crime and Criminal Procedure, Sec 2510.

SPECIFICATIONS

■ Type of audio connections	RCA
■ Current drain	25 mA
■ Maximum gain (per output)	+15dB
■ Output	Line Level (0dBV, 1kΩ @ 1kHz)
■ Power input	12 Vdc, 500mA
■ Dimensions	6 1/8" L x 4 5/8" W x 1 3/8" H
■ Weight	8 oz
■ Shipping Weight	2 lbs

